

Technical Information

Orbital Motors

Type DR, DT and D9



TABLE OF CONTENTS

TECHNICAL INFORMATION

Operating Recommendations.....	4-5
Motor Connections	5
Product Testing (Understanding the Performance Charts).....	6
Allowable Bearing & Shaft Loads	7
Vehicle Drive Calculations	8-9
Induced Side Loading.....	10
Hydraulic Equations.....	10
Shaft Nut Dimensions & Torque Specifications	11

OPTIONAL MOTOR FEATURES

Speed Sensor Options	12-13
Freeturning Rotor Option.....	13
Internal Drain.....	14
Valve Cavity Option	15
Slinger Seal Option.....	15

HEAVY DUTY HYDRAULIC MOTORS

DR Product Line Introduction	16
DR Displacement Performance Charts	17-20
DR Porting Options.....	21-22
600 Series Housings	23
600 Seres Technical Information	24
600 Series Shafts	25
600 Series Ordering Information	26
620 Series Housings	27
620 Series Technical Information	27
620 Series Shafts	28
620 Series Ordering Information	29
630 Series Housings	30
630 Series Technical Information	30
630 Series Shafts	31
630 Series Ordering Information	32
640 Series Housings	33
640 Series Technical Information	34
640 Series Ordering Information	34
DT Product Line Introduction.....	35
DT Displacement Performance Charts.....	36-40
700 Series Porting Options.....	41-42
700 Series Housings	43
700 Series Technical Information	43
700 Series Shafts	44-45
700 Series Ordering Information	46
740 Series Housings	47
740 Series Technical Information	47
740 Series Ordering Information	48
D9 Product Line Introduction.....	49
D9 Displacement Performance Charts.....	50-54
800 Series Housings	55
800 Series Technical Information	56
800 Series Porting Information.....	57-58
800 Series Shafts	58-59
800 Series Ordering Information	60

OPERATING RECOMMENDATIONS

OIL TYPE

Hydraulic oils with anti-wear, anti-foam and demulsifiers are recommended for systems incorporating these motors. Straight oils can be used but may require VI (viscosity index) improvers depending on the operating temperature range of the system. Other water based and environmentally friendly oils may be used, but service life of the motor and other components in the system may be significantly shortened. Before using any type of fluid, consult the fluid requirements for all components in the system for compatibility. Testing under actual operating conditions is the only way to determine if acceptable service life will be achieved.

FLUID VISCOSITY & FILTRATION

Fluids with a viscosity between 20 - 43 cSt [100 - 200 S.U.S.] at operating temperature is recommended. Fluid temperature should also be maintained below 85°C [180° F]. It is also suggested that the type of pump and its operating specifications be taken into account when choosing a fluid for the system. Fluids with high viscosity can cause cavitation at the inlet side of the pump. Systems that operate over a wide range of temperatures may require viscosity improvers to provide acceptable fluid performance.

We recommend maintaining an oil cleanliness level of ISO 17-14 or better.

INSTALLATION & START-UP

When installing a motor it is important that the mounting flange of the motor makes full contact with the mounting surface of the application. Mounting hardware of the appropriate grade and size must be used. Hubs, pulleys, sprockets and couplings must be properly aligned to avoid inducing excessive thrust or radial loads. Although the output device must fit the shaft snug, a hammer should never be used to install any type of output device onto the shaft. The port plugs should only be removed from the motor when the system connections are ready to be made. To avoid contamination, remove all matter from around the ports of the motor and the threads of the fittings. Once all system connections are made, it is recommended that the motor be run-in for 15-30 minutes at no load and half speed to remove air from the hydraulic system.

MOTOR PROTECTION

Over-pressurization of a motor is one of the primary causes of motor failure. To prevent these situations, it is necessary to provide adequate relief protection for a motor based on the pressure ratings for that particular model. For systems that may experience overrunning conditions, special precautions must be taken. In an overrunning condition, the motor functions as a pump and attempts to convert kinetic energy into hydraulic energy. Unless the system is properly

configured for this condition, damage to the motor or system can occur. To protect against this condition a counterbalance valve or relief cartridge must be incorporated into the circuit to reduce the risk of overpressurization. If a relief cartridge is used, it must be installed upline of the motor, if not in the motor, to relieve the pressure created by the over-running motor. To provide proper motor protection for an over-running load application, the pressure setting of the pressure relief valve must not exceed the intermittent rating of the motor.

HYDRAULIC MOTOR SAFETY PRECAUTION

A hydraulic motor must not be used to hold a suspended load. Due to the necessary internal tolerances, all hydraulic motors will experience some degree of creep when a load induced torque is applied to a motor at rest. All applications that require a load to be held must use some form of mechanical brake designed for that purpose.

MOTOR/BRAKE PRECAUTION

Caution! - The motors brakes are intended to operate as static or parking brakes. System circuitry must be designed to bring the load to a stop before applying the brake.

Caution! - Because it is possible for some large displacement motors to overpower the brake, it is critical that the maximum system pressure be limited for these applications. Failure to do so could cause serious injury or death. When choosing a motor/brake for an application, consult the performance chart for the series and displacement chosen for the application to verify that the maximum operating pressure of the system will not allow the motor to produce more torque than the maximum rating of the brake. Also, it is vital that the system relief be set low enough to insure that the motor is not able to overpower the brake.

To ensure proper operation of the brake, a separate case drain back to tank must be used. Use of the internal drain option is not recommended due to the possibility of return line pressure spikes. A simple schematic of a system utilizing a motor/brake is shown on page 4. Although maximum brake release pressure may be used for an application, a 34 bar [500 psi] pressure reducing valve is recommended to promote maximum life for the brake release piston seals. However, if a pressure reducing valve is used in a system which has case drain back pressure, the pressure reducing valve should be set to 34 bar [500 psi] over the expected case pressure to ensure full brake release. To achieve proper brake release operation, it is necessary to bleed out any trapped air and fill brake release cavity and hoses before all connections are tightened. To facilitate this operation, all motor/brakes feature two release ports. One or both of these ports may be used to release the brake in the

OPERATING RECOMMENDATIONS & MOTOR CONNECTIONS

MOTOR/BRAKE PRECAUTION (continued)



unit. Motor brakes should be configured so that the release ports are near the top of the unit in the installed position.

MOTOR CIRCUITS

There are two common types of circuits used for connecting multiple numbers of motors – series connection and parallel connection.


SERIES CONNECTION

When motors are connected in series, the outlet of one motor is connected to the inlet of the next motor. This allows the full pump flow to go through each motor and provide maximum speed. Pressure and torque are distributed between the motors based on the load each motor is subjected to. The maximum system pressure must be no greater than the maximum inlet pressure of the first motor. The allowable back pressure rating for a motor must also be considered. In some series circuits the motors must have an external case drain connected. A series connection is desirable when it is important for all the motors to run the same speed such as on a long line conveyor.

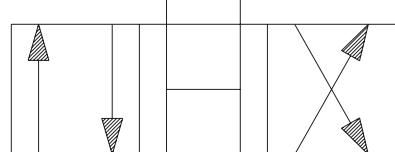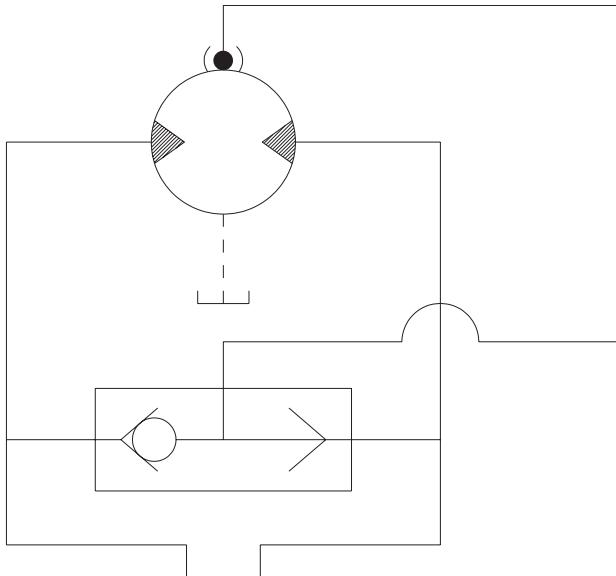

TYPICAL MOTOR/BRAKE SCHEMATIC


Once all system connections are made, one release port must be opened to atmosphere and the brake release line carefully charged with fluid until all air is removed from the line and motor/brake release cavity. When this has been accomplished the port plug or secondary release line must be reinstalled. In the event of a pump or battery failure, an external pressure source may be connected to the brake release port to release the brake, allowing the machine to be moved.

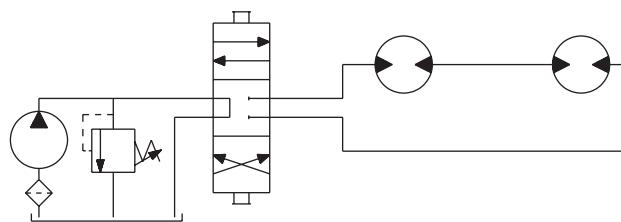

SERIES CIRCUIT

PARALLEL CONNECTION

In a parallel connection all of the motor inlets are connected. This makes the maximum system pressure available to each motor allowing each motor to produce full torque at that pressure. The pump flow is split between the individual motors according to their loads and displacements. If one motor has no load, the oil will take the path of least resistance and all the flow will go to that one motor. The others will not turn. If this condition can occur, a flow divider is recommended to distribute the oil and act as a differential.

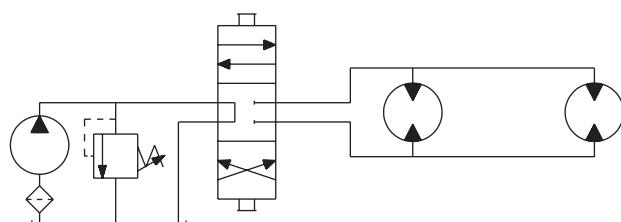


SERIES CIRCUIT

► NOTE: It is vital that all operating recommendations be followed. Failure to do so could result in injury or death.

► NOTE: The motor circuits shown above are for illustration purposes only. Components and circuitry for actual applications may vary greatly and should be chosen based on the application.

PRODUCT TESTING

Performance testing is the critical measure of a motor's ability to convert flow and pressure into speed and torque. All product testing is conducted using a state of the art test facility. This facility utilizes fully automated test equipment and custom designed software to provide accurate, reliable test data. Test routines are standardized, including test stand calibration and stabilization of fluid temperature and viscosity, to provide consistent data. The example below provides an explanation of the values pertaining to each heading on the performance chart.

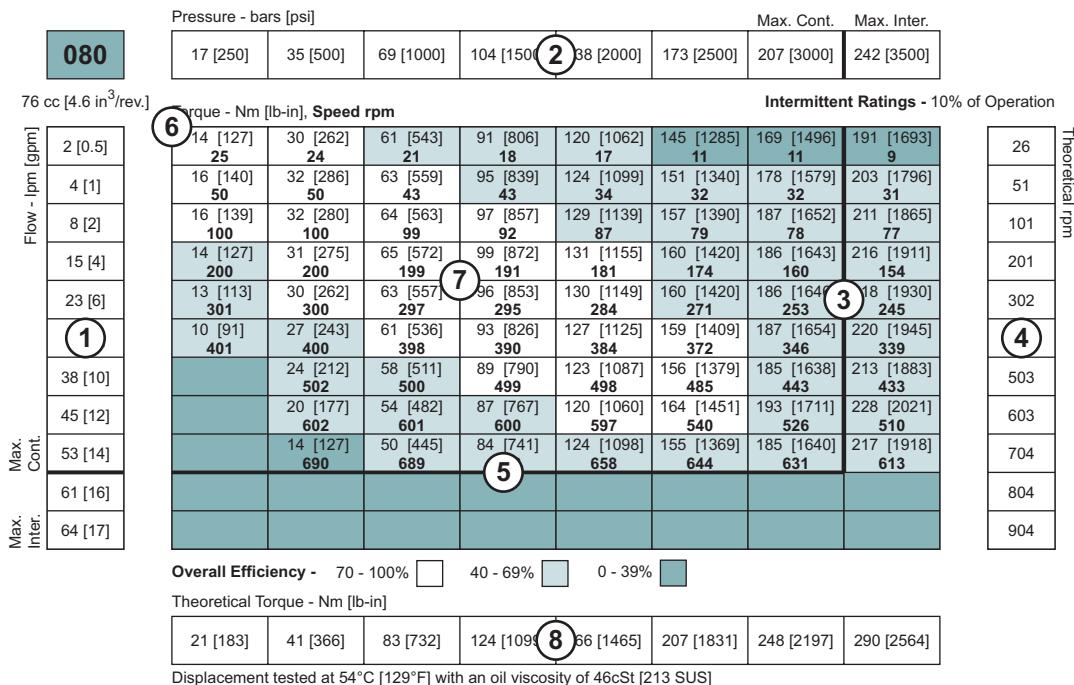

1. Flow represents the amount of fluid passing through the motor during each minute of the test.
2. Pressure refers to the measured pressure differential between the inlet and return ports of the motor during the test.
3. The maximum continuous pressure rating and maximum intermittent pressure rating of the motor are separated by the dark lines on the chart.
4. Theoretical RPM represents the RPM that the motor would produce if it were 100% volumetrically efficient. Measured RPM divided by the theoretical RPM give the actual volumetric efficiency of the motor.
5. The maximum continuous flow rating and maximum intermittent flow rating of the motor are separated by the dark line on the chart.
6. Performance numbers represent the actual torque and speed generated by the motor based on the corresponding input pressure and flow. The numbers on the top row indicate torque as measured in Nm [lb-in], while the bottom number represents the speed of the output shaft.
7. Areas within the white shading represent maximum motor efficiencies.
8. Theoretical Torque represents the torque that the motor would produce if it were 100% mechanically efficient. Actual torque divided by the theoretical torque gives the actual mechanical efficiency of the motor.

ALLOWABLE BEARING & SHAFT LOADING

This catalog provides curves showing allowable radial loads at points along the longitudinal axis of the motor. They are dimensioned from the mounting flange. Two capacity curves for the shaft and bearings are shown. A vertical line through the centerline of the load drawn to intersect the x-axis intersects the curves at the load capacity of the shaft and of the bearing.

In the example below the maximum radial load bearing rating is between the internal roller bearings illustrated with a solid line. The allowable shaft rating is shown with a dotted line.

The bearing curves for each model are based on laboratory analysis and testing results constructed at the organization. The shaft loading is based on a 3:1 safety factor and 330 Kpsi tensile strength. The allowable load is the lower of the curves at a given point. For instance, one inch in front of the mounting flange the bearing capacity is lower than the shaft capacity. In this case, the bearing is the limiting load. The motor user needs to determine which series of motor to use based on their application knowledge.

ISO 281 RATINGS VS. MANUFACTURERS RATINGS

Published bearing curves can come from more than one type of analysis. The ISO 281 bearing rating is an international standard for the dynamic load rating of roller bearings. The rating is for a set load at a speed of 33 1/3 RPM for 500 hours (1 million revolutions). The standard was established to allow consistent comparisons of similar bearings between manufacturers. The ISO 281 bearing ratings are based solely on the physical characteristics of the bearings, removing any manufacturers specific safety factors or empirical data that influences the ratings.

Manufacturers' ratings are adjusted by diverse and systematic laboratory investigations, checked constantly with feedback from practical experience. Factors taken into account that affect bearing life are material, lubrication, cleanliness of the lubrication, speed, temperature, magnitude of the load and the bearing type.

The operating life of a bearing is the actual life achieved by the bearing and can be significantly different from the calculated life. Comparison with similar applications is the most accurate method for bearing life estimations.

EXAMPLE LOAD RATING FOR MECHANICALLY RETAINED NEEDLE ROLLER BEARINGS


$$\text{Bearing Life } L_{10} = (C/P)^P [10^6 \text{ revolutions}]$$

L_{10} = nominal rating life

C = dynamic load rating

P = equivalent dynamic load

Life Exponent P = 10/3 for needle bearings

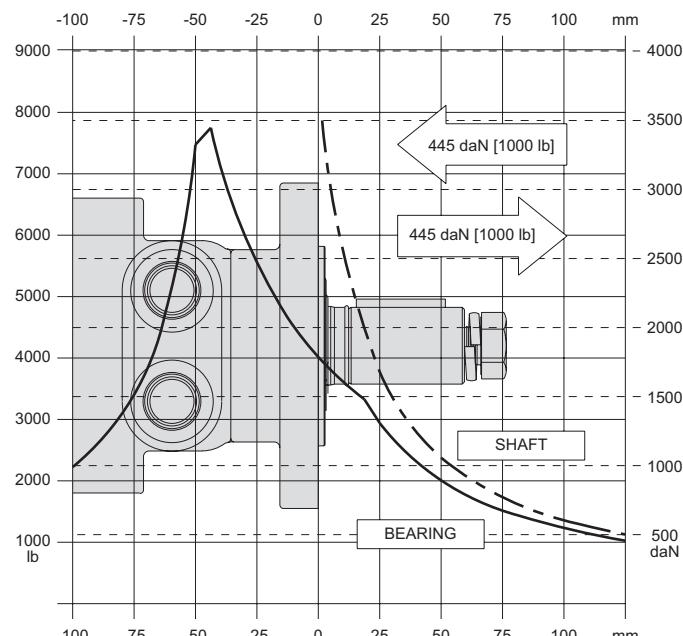

BEARING LOAD MULTIPLICATION FACTOR TABLE

RPM	FACTOR	RPM	FACTOR
50	1.23	500	0.62
100	1.00	600	0.58
200	0.81	700	0.56
300	0.72	800	0.50
400	0.66		

VEHICLE DRIVE CALCULATIONS

When selecting a wheel drive motor for a mobile vehicle, a number of factors concerning the vehicle must be taken into consideration to determine the required maximum motor RPM, the maximum torque required and the maximum load each motor must support. The following sections contain the necessary equations to determine this criteria. An example is provided to illustrate the process.

Sample application (vehicle design criteria)

vehicle description	4 wheel vehicle
vehicle drive.....	2 wheel drive
GVW	1,500 lbs.
weight over each drive wheel425 lbs.
rolling radius of tires	16 in.
desired acceleration	0.5 mph in 10 sec.
top speed.....	5 mph
gradability	20%
worst working surface.....	poor asphalt

To determine maximum motor speed

$$RPM = \frac{2.65 \times KPH \times G}{rm} \quad RPM = \frac{168 \times MPH \times G}{ri}$$

Where:

KPH = max. vehicle speed (miles/hr)

KPH = max. vehicle speed (kilometers/hr)

ri = rolling radius of tire (inches)

G = gear reduction ratio (if none, G = 1)

rm = rolling radius of tire (meters)

$$\text{Example} \quad RPM = \frac{168 \times 5 \times 1}{16} = 52.5$$

To determine maximum torque requirement of motor

To choose a motor(s) capable of producing enough torque to propel the vehicle, it is necessary to determine the Total Tractive Effort (TE) requirement for the vehicle.

To determine the total tractive effort, the following equation must be used:

$$TE = RR + GR + FA + DP \text{ (lbs or N)}$$

Where:

TE = Total tractive effort

RR = Force necessary to overcome rolling resistance

GR = Force required to climb a grade

FA = Force required to accelerate

DP = Drawbar pull required

The components for this equation may be determined using the following steps:

Step One: Determine Rolling Resistance

Rolling Resistance (RR) is the force necessary to propel a vehicle over a particular surface. It is recommended that the worst possible surface type to be encountered by the vehicle be factored into the equation.

$$RR = \frac{GVW}{1000} \times R \text{ (lb or N)}$$

Where:

GVW = gross (loaded) vehicle weight (lb or kg)

R = surface friction (value from Table 1)

$$\text{Example} \quad RR = \frac{1500}{1000} \times 22 \text{ lbs} = 33 \text{ lbs}$$

Table 1

Rolling Resistance	
Concrete (excellent)	10
Concrete (good).....	15
Concrete (poor)	20
Asphalt (good)	12
Asphalt (fair)	17
Asphalt (poor).....	22
Macadam (good)	15
Macadam (fair)	22
Macadam (poor)	37
Cobbles (ordinary).....	55
Cobbles (poor).....	37
Snow (2 inch).....	25
Snow (4 inch).....	37
Dirt (smooth).....	25
Dirt (sandy).....	37
Mud.....	37 to 150
Sand (soft).....	60 to 150
Sand (dune).....	160 to 300

Step Two: Determine Grade Resistance

Grade Resistance (GR) is the amount of force necessary to move a vehicle up a hill or "grade." This calculation must be made using the maximum grade the vehicle will be expected to climb in normal operation.

To convert incline degrees to % Grade:

$$\% \text{ Grade} = [\tan \text{ of angle (degrees)}] \times 100$$

$$GR = \frac{\% \text{ Grade}}{100} \times GVW \text{ (lb or N)}$$

$$\text{Example} \quad GR = \frac{20}{100} \times 1500 \text{ lbs} = 300 \text{ lbs}$$

VEHICLE DRIVE CALCULATIONS

Step Three: Determine Acceleration Force

Acceleration Force (FA) is the force necessary to accelerate from a stop to maximum speed in a desired time.

$$FA = \frac{MPH \times GVW (\text{lb})}{22 \times t}$$

$$FA = \frac{KPH \times GVW (\text{N})}{35.32 \times t}$$

Where:

t = time to maximum speed (seconds)

Example	$FA = \frac{5 \times 1500 \text{ lbs}}{22 \times 10} = 34 \text{ lbs}$
----------------	--

Step Four: Determine Drawbar Pull

Drawbar Pull (DP) is the additional force, if any, the vehicle will be required to generate if it is to be used to tow other equipment. If additional towing capacity is required for the equipment, repeat steps one through three for the towable equipment and sum the totals to determine DP.

Step Five: Determine Total Tractive Effort

The Tractive Effort (TE) is the sum of the forces calculated in steps one through three above. On low speed vehicles, wind resistance can typically be neglected. However, friction in drive components may warrant the addition of 10% to the total tractive effort to insure acceptable vehicle performance.

$$TE = RR + GR + FA + DP \text{ (lb or N)}$$

Example	$TE = 33 + 300 + 34 + 0 \text{ (lbs)} = 367 \text{ lbs}$
----------------	--

Step Six: Determine Motor Torque

The Motor Torque (T) required per motor is the Total Tractive Effort divided by the number of motors used on the machine. Gear reduction is also factored into account in this equation.

$$T = \frac{TE \times ri}{M \times G} \text{ lb-in per motor} \quad T = \frac{TE \times rm}{M \times G} \text{ Nm per motor}$$

Where:

M = number of driving motors

Example	$T = \frac{367 \times 16}{2 \times 1} \text{ lb-in/motor} = 2936 \text{ lb-in}$
----------------	---

Step Seven: Determine Wheel Slip

To verify that the vehicle will perform as designed in regards to tractive effort and acceleration, it is necessary to calculate wheel slip (TS) for the vehicle. In special cases, wheel slip may actually be desirable to prevent hydraulic system overheating and component breakage should the vehicle become stalled.

$$TS = \frac{W \times f \times ri}{G}$$

(lb-in per motor)

$$TS = \frac{W \times f \times rm}{G}$$

(N-m per motor)

Where:

f = coefficient of friction (see table 2)

W = loaded vehicle weight over driven wheel (lb or N)

Example	$TS = \frac{425 \times .06 \times 16}{1} \text{ lb-in/motor} = 4080 \text{ lbs}$
----------------	--

Table 2

Coefficient of friction (f)	
Steel on steel.....	0.3
Rubber tire on dirt.....	0.5
Rubber tire on a hard surface.....	0.6 - 0.8
Rubber tire on cement.....	0.7

To determine radial load capacity requirement of motor

When a motor used to drive a vehicle has the wheel or hub attached directly to the motor shaft, it is critical that the radial load capabilities of the motor are sufficient to support the vehicle. After calculating the Total Radial Load (RL) acting on the motors, the result must be compared to the bearing/shaft load charts for the chosen motor to determine if the motor will provide acceptable load capacity and life.


$$RL = \sqrt{W^2 + \left(\frac{T}{ri}\right)^2} \text{ lb} \quad RL = \sqrt{W^2 + \left(\frac{T}{rm}\right)^2} \text{ kg}$$

Example	$RL = \sqrt{425^2 + \left(\frac{2936}{16}\right)^2} = 463 \text{ lbs}$
----------------	--


Once the maximum motor RPM, maximum torque requirement, and the maximum load each motor must support have been determined, these figures may then be compared to the motor performance charts and to the bearing load curves to choose a series and displacement to fulfill the motor requirements for the application.

INDUCED SIDE LOAD

In many cases, pulleys or sprockets may be used to transmit the torque produced by the motor. Use of these components will create a torque induced side load on the motor shaft and bearings. It is important that this load be taken into consideration when choosing a motor with sufficient bearing and shaft capacity for the application.

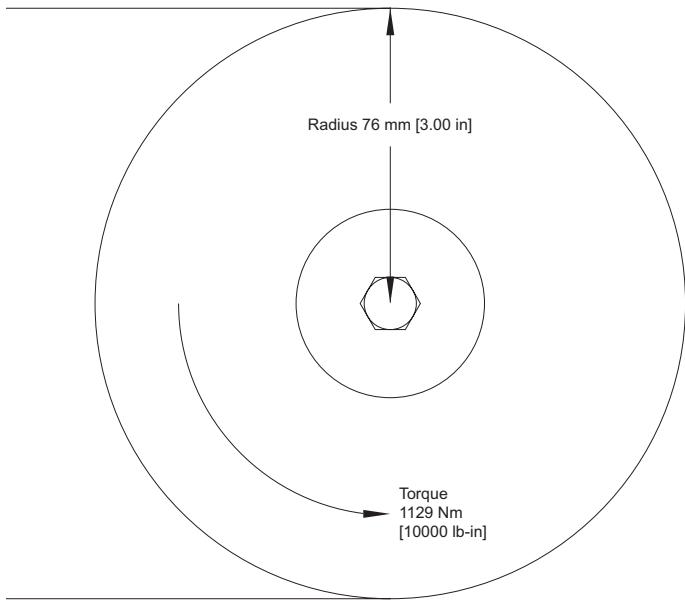

To determine the side load, the motor torque and pulley or sprocket radius must be known. Side load may be calculated using the formula below. The distance from the pulley/sprocket centerline to the mounting flange of the motor must also be determined. These two figures may then be compared to the bearing and shaft load curve of the desired motor to determine if the side load falls within acceptable load ranges.

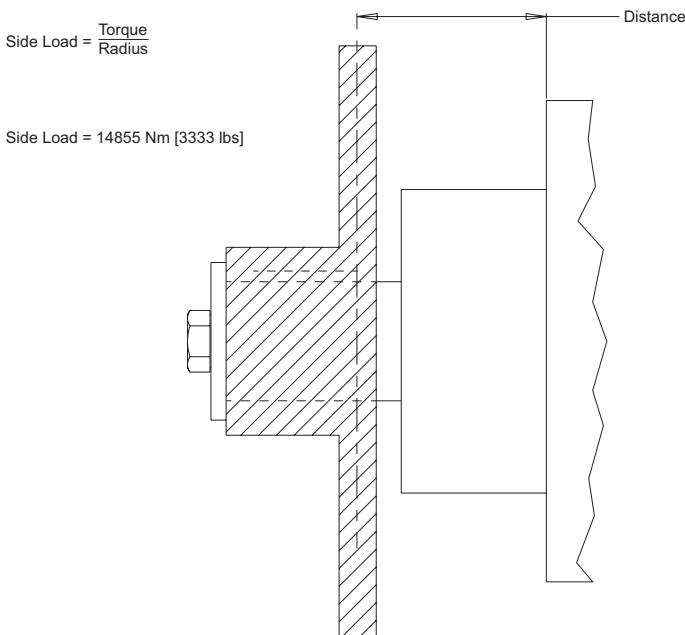

HYDRAULIC EQUATIONS

Multiplication Factor	Abbrev.	Prefix
10^{12}	T	tera
10^9	G	giga
10^6	M	mega
10^3	K	kilo
10^2	h	hecto
10^1	da	deka
10^{-1}	d	deci
10^{-2}	c	centi
10^{-3}	m	milli
10^{-6}	u	micro
10^{-9}	n	nano
10^{-12}	p	pico
10^{-15}	f	femto
10^{-18}	a	atto

$$\text{Theo. Speed (RPM)} =$$

$$\frac{1000 \times \text{LPM}}{\text{Displacement (cm}^3/\text{rev})} \quad \text{or} \quad \frac{231 \times \text{GPM}}{\text{Displacement (in}^3/\text{rev})}$$

$$\text{Theo. Torque (lb-in)} =$$

$$\frac{\text{Bar} \times \text{Disp. (cm}^3/\text{rev})}{20 \pi} \quad \text{or} \quad \frac{\text{PSI} \times \text{Displacement (in}^3/\text{rev})}{6.28}$$

$$\text{Power In (HP)} =$$

$$\frac{\text{Bar} \times \text{LPM}}{600} \quad \text{or} \quad \frac{\text{PSI} \times \text{GPM}}{1714}$$

$$\text{Power Out (HP)} =$$


$$\frac{\text{Torque (Nm) } \times \text{RPM}}{9543} \quad \text{or} \quad \frac{\text{Torque (lb-in) } \times \text{RPM}}{63024}$$

SHAFT NUT INFORMATION

35MM TAPERED SHAFTS

M24 x 1.5 Thread

A Slotted Nut

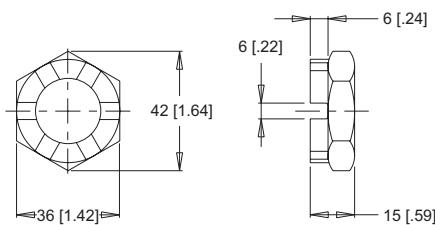


Torque Specifications: 32.5 daNm [240 ft.lb.]

1" TAPERED SHAFTS


3/4-28 Thread

A Slotted Nut

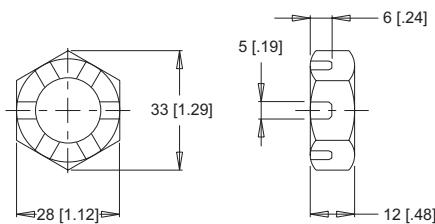


Torque Specifications: 20 - 23 daNm [150 - 170 ft.lb.]

B Lock Nut

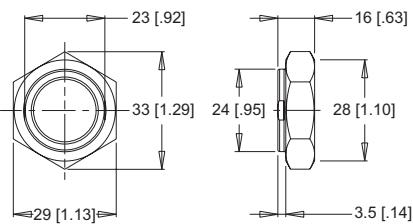

Torque Specifications: 24 - 27 daNm [180 - 200 ft.lb.]

C Solid Nut

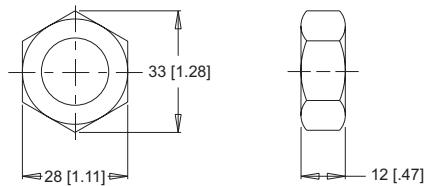


Torque Specifications: 20 - 23 daNm [150 - 170 ft.lb.]

1-1/4" TAPERED SHAFTS


1-20 Thread

A Slotted Nut

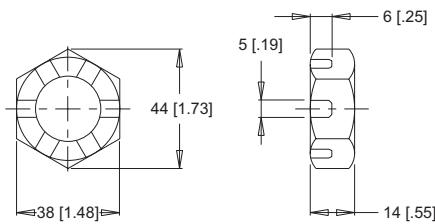


Torque Specifications: 38 daNm [280 ft.lb.] Max.

B Lock Nut

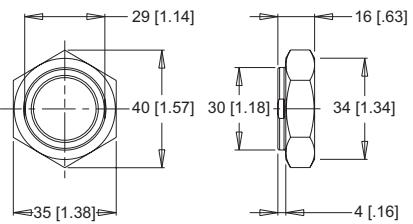

Torque Specifications: 33 - 42 daNm [240 - 310 ft.lb.]

C Solid Nut

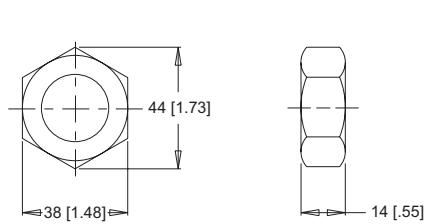


Torque Specifications: 38 daNm [280 ft.lb.] Max.

1-3/8" & 1-1/2" TAPERED SHAFTS


1 1/8-18 Thread

A Slotted Nut

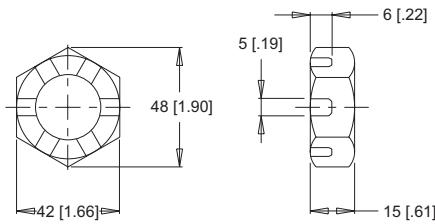


Torque Specifications: 41 - 54 daNm [300 - 400 ft.lb.]

B Lock Nut

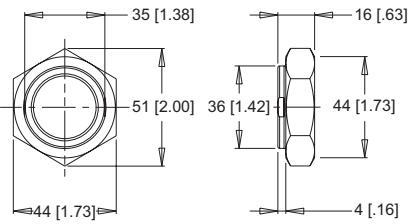

Torque Specifications: 34 - 48 daNm [250 - 350 ft.lb.]


C Solid Nut

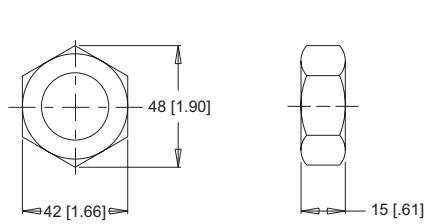


Torque Specifications: 41 - 54 daNm [300 - 400 ft.lb.]

PRECAUTION

The tightening torques listed with each nut should only be used as a guideline. Hubs may require higher or lower tightening torque depending on the material. Consult the hub manufacturer to obtain recommended tightening torque. To maximize torque transfer from the shaft to the hub, and to minimize the potential for shaft breakage, a hub with sufficient thickness must fully engage the taper length of the shaft.



incorrect




correct

SPEED SENSORS

We offer both single and dual element speed sensor options providing a number of benefits to users by incorporating the latest advancements in sensing technology and materials. The 700 & 800 series motors single element sensors provide 60 pulses per revolution with the dual element providing 120 pulses per revolution, with all other series providing 50 & 100 pulses respectively. Higher resolution is especially beneficial for slow speed applications, where more information is needed for smooth and accurate control. The dual sensor option also provides a direction signal allowing end-users to monitor the direction of shaft rotation .

Unlike competitive designs that breach the high pressure area of the motor to add the sensor, the speed sensor option utilizes an add-on flange to locate all sensor components outside the high pressure operating environment. This eliminates the potential leak point common to competitive designs. Many improvements were made to the sensor flange including changing the material from cast iron to acetal resin, incorporating a Buna-N shaft seal internal to the flange, and providing a grease zerk, which allows the user to fill the sensor cavity with grease. These improvements enable the flange to withstand the rigors of harsh environments.

Another important feature of the new sensor flange is that it is self-centering, which allows it to remain concentric to the magnet rotor. This produces a consistent mounting location for the new sensor module, eliminating the need to adjust

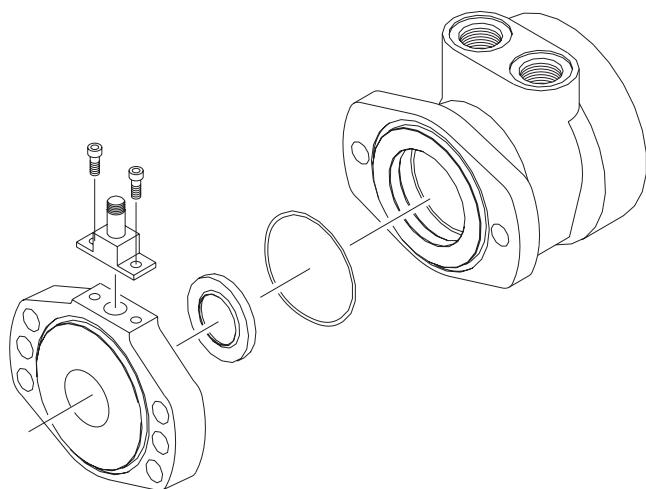

the air gap between the sensor and magnet rotor. The o-ring sealed sensor module attaches to the sensor flange with two small screws, allowing the sensor to be serviced or upgraded in the field in under one minute. This feature is especially valuable for mobile applications where machine downtime is costly. The sensor may also be serviced without exposing the hydraulic circuit to the atmosphere. Another advantage of the self-centering flange is that it allows users to rotate the sensor to a location best suited to their application. This feature is not available on competitive designs, which fix the sensor in one location in relationship to the motor mounting flange.

FEATURES / BENEFITS

- Grease fitting allows sensor cavity to be filled with grease for additional protection.
- Internal extruder seal protects against environmental elements.
- M12 or weatherpack connectors provide installation flexibility.
- Dual element sensor provides up to 120 pulses per revolution and directional sensing.
- Modular sensor allows quick and easy servicing.
- Acetal resin flange is resistant to moisture, chemicals, oils, solvents and greases.
- Self-centering design eliminates need to set magnet-to-sensor air gap.
- Protection circuitry

SENSOR OPTIONS

Z - 4-pin M12 male connector

This option has 50 pulses per revolution on all series except the DT which has 60 pulses per revolution. This option will not detect direction.

Y - 3-pin male weatherpack connector*

This option has 50 pulses per revolution on all series except the DT which has 60 pulses per revolution. This option will not detect direction.

X - 4-pin M12 male connector

This option has 100 pulses per revolution on all series except the DT which has 120 pulses per revolution. This option will detect direction.

W - 4-pin male weatherpack connector*

This option has 100 pulses per revolution on all series except the DT which has 120 pulses per revolution. This option will detect direction.

*These options include a 610mm [2 ft] cable.

SPEED SENSORS

SINGLE ELEMENT SENSOR - Y & Z

Supply voltages 7.5-24 Vdc
 Maximum output off voltage 24 V
 Maximum continuous output current < 25 ma
 Signal levels (low, high) 0.8 to supply voltage
 Operating Temp -30°C to 83°C [-22°F to 181°F]

DUAL ELEMENT SENSOR - X & W

Supply voltages 7.5-18 Vdc
 Maximum output off voltage 18 V
 Maximum continuous output current < 20 ma
 Signal levels (low, high) 0.8 to supply voltage
 Operating Temp -30°C to 83°C [-22°F to 181°F]

SENSOR CONNECTORS

Z Option



PIN

1	positive	brown or red
2	n/a	white
3	negative	blue
4	pulse out	black


X Option



PIN

1	positive	brown or red
2	direction out	white
3	negative	blue
4	pulse out	black


Y Option



PIN

A	positive	brown or red
B	negative	blue
C	pulse out	black
D	n/a	white

W Option



PIN

A	positive	brown or red
B	negative	blue
C	pulse out	black
D	direction out	white

PROTECTION CIRCUITRY

The single element sensor has been improved and incorporates protection circuitry to avoid electrical damage caused by:

- reverse battery protection
- overvoltage due to power supply spikes and surges (60 Vdc max.)
- power applied to the output lead

The protection circuit feature will help "save" the sensor from damage mentioned above caused by:

- faulty installation wiring or system repair
- wiring harness shorts/opens due to equipment failure or harness damage resulting from accidental conditions (i.e. severed or grounded wire, ice, etc.)
- power supply spikes and surges caused by other electrical/electronic components that may be intermittent or damaged and "loading down" the system.

While no protection circuit can guarantee against any and all fault conditions. The single element sensor from us with protection circuitry is designed to handle potential hazards commonly seen in real world applications.

Unprotected versions are also available for operation at lower voltages down to 4.5V.

FREE TURNING ROTOR

The 'AC' option or "Free turning" option refers to a specially prepared rotor assembly. This rotor assembly has increased clearance between the rotor tips and rollers allowing it to turn more freely than a standard rotor assembly. For spool valve motors, additional clearance is also provided between the shaft and housing bore. The 'AC' option is available for all motor series and displacements.

There are several applications and duty cycle conditions where 'AC' option performance characteristics can be beneficial. In continuous duty applications that require high flow/high rpm operation, the benefits are twofold. The additional clearance helps to minimize internal pressure drop at high flows. This clearance also provides a thicker oil film at metal to metal contact areas and can help extend the life of the motor in high rpm or even over speed conditions. The 'AC' option should be considered for applications that require continuous operation above 57 LPM [15 GPM] and/or 300 rpm. Applications that are subject to pressure spikes due to frequent reversals or shock loads can also benefit by specifying the 'AC' option. The additional clearance serves to act as a buffer against spikes, allowing them to be bypassed through the motor rather than being absorbed and transmitted through the drive link to the output shaft. The trade-off for achieving these benefits is a slight loss of volumetric efficiency at high pressures.


INTERNAL DRAIN

The internal drain is an option available on all HB, DR, and DT Series motors, and is standard on all WP, WR, WS, and D9 series motors. Typically, a separate drain line must be installed to direct case leakage of the motor back to the reservoir when using a HB, DR, or DT Series motor. However, the internal drain option eliminates the need for a separate drain line through the installation of two check valves in the motor endcover. This simplifies plumbing requirements for the motor.

The two check valves connect the case area of the motor to each port of the endcover. During normal motor operation, pressure in the input and return lines of the motor close the check valves. However, when the pressure in the case of the motor is greater than that of the return line, the check valve between the case and low pressure line opens, allowing the case leakage to flow into the return line. Since the operation of the check valves is dependent upon a pressure differential, the internal drain option operates in either direction of motor rotation.


Although this option can simplify many motor installations, precautions must be taken to insure that return line pressure remains below allowable levels (see table below) to insure proper motor operation and life. If return line pressure is higher than allowable, or experiences pressure spikes, this pressure may feed back into the motor, possibly causing catastrophic seal failure. Installing motors with internal drains in series is not recommended unless overall pressure drop over all motors is below the maximum allowable backpressure as listed in the chart below. If in doubt, contact your authorized representative.

MAXIMUM ALLOWABLE BACK PRESSURE		
Series	Cont. bar [psi]	Inter. bar [psi]
HB	69 [1000]	103 [1500]
DR	69 [1000]	103 [1500]
DT	21 [300]	34 [500]
D9	21 [300]	21 [300]
Brakes	34 [500]	34 [500]



VALVE CAVITY


The valve cavity option provides a cost effective way to incorporate a variety of cartridge valves integral to the motor. The valve cavity is a standard 10 series (12 series on the 800 series motor) 2-way cavity that accepts numerous cartridge valves, including overrunning check valves, relief cartridges, flow control valves, pilot operated check fuses, and high pressure shuttle valves. Installation of a relief cartridge into the cavity provides an extra margin of safety for applications encountering frequent pressure spikes. Relief cartridges from 69 to 207 bar [1000 to 3000 psi] may also be factory installed.

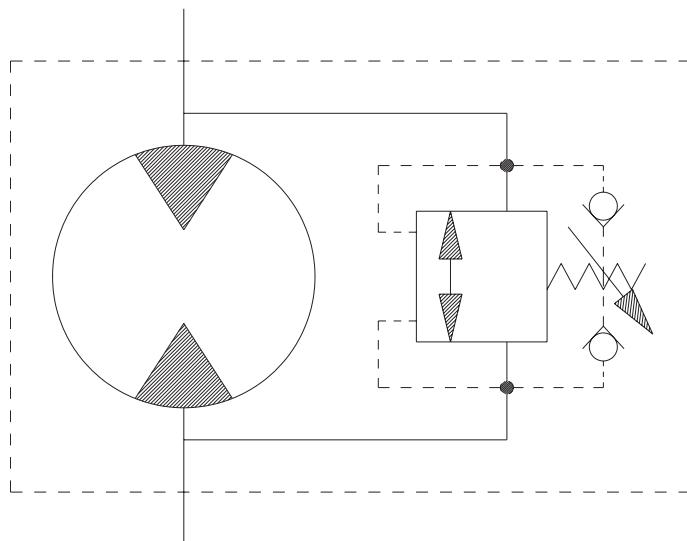

For basic systems with fixed displacement pumps, either manual or motorized flow control valves may be installed into the valve cavity to provide a simple method for controlling motor speed. It is also possible to incorporate the speed sensor option and a programmable logic controller with a motorized flow control valve to create a closed loop, fully automated speed control system. For motors with internal brakes, a shuttle valve cartridge may be installed into the cavity to provide a simple, fully integrated method for supplying release pressure to the pilot line to actuate an integral brake. To discuss other alternatives for the valve cavity option, contact an authorized distributor.

SLINGER SEAL

Slinger seals are available on select series offered by us. Slinger seals offer extended shaft/shaft seal protection by preventing a buildup of material around the circumference of the shaft which can lead to premature shaft seal failures. The slinger seals are designed to be larger in diameter than competitive products, providing greater surface speed and 'slinging action'.

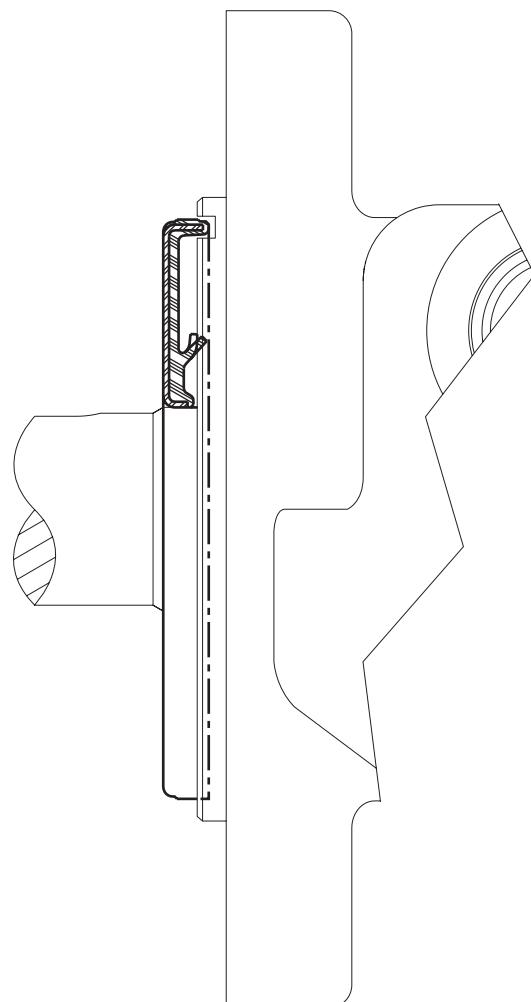

Slinger seals are also available on 4-hole flange mounts on select series. Contact a Customer Service Representative for additional information.

DR (All Series)


For Heavy Duty Applications

OVERVIEW


Due to its case drain design, the DR Series motor is an excellent medium size motor for applications with high-duty cycles or frequent direction reversal. The case drain design produces a number of benefits including reduction of pressure on the shaft seal and the ability to provide a cooling loop for the system. The case flow also lubricates the vital drive components, extending motor life. An internal drain option is also available. A laminated manifold and three-zone orbiting valve are used to produce higher overall efficiencies and more usable power. A steel faced seal in the orbiting valve also reduces the risk of the seal extruding or melting, which is possible in competitive designs.

SERIES DESCRIPTIONS


600 - Hydraulic Motor
Standard




620 - Hydraulic Motor
With Medium Duty Bearing



630 - Hydraulic Motor
With Heavy Duty Bearing



640 - Hydraulic Motor
With Wheel Hub



FEATURES / BENEFITS

- Four Bearing Options allow load carrying capabilities of motor to be matched to application.
- Heavy-Duty Drive Link is the most durable in its class and receives case flow lubrication for reduced wear and increased life.
- Three-Zone Orbiting Valve precisely meters oil to produce exceptional volumetric efficiency.
- Rubber Energized Steel Face Seal does not extrude or melt under high pressure or high temperature.
- Standard Case Drain increases shaft seal life by reducing pressure on seal.

TYPICAL APPLICATIONS

Medium-duty wheel drives, augers, mixers, winch drives, swing drives, grapple heads, feed rollers, broom drives, chippers, mining equipment, forestry equipment and more

SPECIFICATIONS

CODE	Displacement cm ³ [in ³ /rev]	Max. Speed rpm		Max. Flow lpm [gpm]		Max. Torque Nm [lb-in]		Max. Pressure bar [psi]		
		cont.	inter.	cont.	inter.	cont.	inter.	cont.	inter.	peak
200	204 [12.4]	470	560	95 [25]	114 [30]	554 [4900]	644 [5700]	207 [3000]	241 [3500]	276 [4000]
260	261 [15.9]	360	440	95 [25]	114 [30]	745 [6590]	859 [7600]	207 [3000]	241 [3500]	276 [4000]
300	300 [18.3]	320	380	95 [25]	114 [30]	842 [7450]	972 [8600]	207 [3000]	241 [3500]	276 [4000]
350	348 [21.2]	270	320	95 [25]	114 [30]	972 [8600]	1107 [9800]	207 [3000]	241 [3500]	276 [4000]
375	375 [22.8]	250	300	95 [25]	114 [30]	1085 [9600]	1243 [11000]	207 [3000]	241 [3500]	276 [4000]
470	465 [28.3]	200	240	95 [25]	114 [30]	1107 [9800]	1316 [11650]	172 [2500]	207 [3000]	241 [3500]
540	536 [32.7]	180	210	95 [25]	114 [30]	1034 [9150]	1277 [11300]	138 [2000]	172 [2500]	207 [3000]
750	748 [45.6]	130	150	95 [25]	114 [30]	1040 [9200]	1390 [12300]	103 [1500]	138 [2000]	172 [2500]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Running at intermittent ratings should not exceed 10% of every minute of operation.

DISPLACEMENT PERFORMANCE

		Pressure - bar [psi]						Max. Cont.	Max. Inter.
200		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	241 [3500]
204 cm ³ [12.4 in ³] / rev									
Torque - Nm [lb-in], Speed rpm									
Flow - lpm [gpm]	2 [0.5]	38 [335] 7	77 [683] 4						
	4 [1]	39 [342] 16	85 [748] 15	174 [1543] 13	258 [2284] 9	329 [2913] 5			
	8 [2]	38 [339] 35	90 [795] 34	178 [1579] 32	271 [2396] 28	361 [3192] 23	454 [4016] 16	519 [4594] 11	562 [4977] 3
	15 [4]	36 [323] 73	85 [749] 72	178 [1576] 69	283 [2506] 64	378 [3346] 57	459 [4059] 54	555 [4909] 44	636 [5625] 35
	23 [6]		78 [690] 110	177 [1562] 106	273 [2413] 101	362 [3202] 97	462 [4085] 89	551 [4880] 80	645 [5711] 70
	30 [8]		74 [654] 148	172 [1518] 145	268 [2368] 141	357 [3156] 133	469 [4154] 126	558 [4936] 117	653 [5778] 105
	38 [10]			168 [1491] 184	260 [2301] 178	349 [3091] 174	444 [3933] 167	541 [4783] 156	638 [5646] 144
	45 [12]				156 [1381] 221	255 [2256] 215	350 [3096] 209	450 [3985] 204	542 [4793] 199
	53 [14]					150 [1332] 259	251 [2219] 254	330 [2919] 250	435 [3850] 241
	61 [16]						330 [2919] 250	526 [4653] 231	638 [5643] 213
	68 [18]							522 [4616] 276	613 [5423] 256
	76 [20]								602 [5329] 298
	83 [22]								587 [5198] 337
	91 [24]								579 [5121] 374
	95 [25]								562 [4970] 417
	114 [30]								560 [4953] 432
Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>									
Theoretical Torque - Nm [lb-in]									
Rotor Width	17.3 [.682]	56 [494]	112 [987]	223 [1975]	335 [2962]	446 [3949]	558 [4936]	669 [5924]	781 [6911]
mm [in]		Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]							

		Pressure - bar [psi]						Max. Cont.	Max. Inter.
260		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	241 [3500]
261 cm ³ [15.9 in ³] / rev									
Torque - Nm [lb-in], Speed rpm									
Flow - lpm [gpm]	2 [0.5]	47 [417] 5	109 [962] 4						
	4 [1]	51 [454] 13	110 [972] 11	238 [2104] 11	355 [3139] 8	460 [4074] 5			
	8 [2]	52 [462] 28	113 [1004] 27	242 [2145] 25	367 [3244] 22	485 [4292] 18	603 [5334] 14	715 [6323] 11	
	15 [4]	49 [430] 57	111 [985] 56	239 [2115] 54	367 [3247] 51	491 [4343] 45	619 [5474] 41	746 [6598] 36	859 [7600] 30
	23 [6]	44 [391] 87	107 [950] 86	234 [2067] 83	364 [3225] 78	487 [4311] 72	617 [5458] 67	738 [6530] 123	854 [7557] 54
	30 [8]		100 [884] 115	228 [2016] 113	355 [3146] 107	478 [4230] 103	612 [5418] 95	733 [6487] 89	868 [7677] 82
	38 [10]		90 [797] 145	220 [1947] 143	348 [3080] 138	468 [4143] 132	605 [5351] 123	734 [6498] 115	852 [7541] 107
	45 [12]		84 [748] 174	212 [1877] 172	340 [3011] 168	463 [4094] 162	596 [5272] 152	722 [6390] 143	845 [7481] 133
	53 [14]		71 [6311] 203	205 [1813] 201	330 [2921] 198	452 [4004] 185	587 [5195] 179	706 [6244] 173	846 [7491] 163
	61 [16]			191 [1688] 231	317 [2807] 228	444 [3927] 223	574 [5077] 214	703 [6221] 203	824 [7291] 196
	68 [18]			174 [1540] 261	305 [2698] 256	429 [3798] 251	560 [4952] 246	690 [6111] 230	815 [7214] 220
	76 [20]			156 [1383] 290	289 [2558] 289	418 [3700] 282	544 [4817] 268	675 [5977] 262	810 [7166] 247
	83 [22]			143 [1270] 319	275 [2431] 317	405 [3585] 313	533 [4717] 300	659 [5828] 293	787 [6961] 277
	91 [24]			131 [1158] 348	255 [2253] 346	387 [3421] 342	515 [4554] 333	613 [5421] 322	769 [6805] 311
	95 [25]				239 [2115] 362	373 [3301] 357	505 [4471] 348	628 [5559] 342	772 [6832] 328
	114 [30]				157 [1388] 434	298 [2637] 432	426 [3768] 427		
Rotor Width	22.1 [.872]	Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>							
mm [in]		Theoretical Torque - Nm [lb-in]							
		72 [633]	143 [1266]	286 [2532]	429 [3798]	572 [5064]	715 [6330]	858 [7596]	1001 [8861]
Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]									

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DR (All Series)

For Heavy Duty Applications

DISPLACEMENT PERFORMANCE

Pressure - bar [psi]									Max. Cont.	Max. Inter.
300	17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	241 [3500]		
300 cm ³ [18.3 in ³] / rev										
Flow - lpm [gpm]	Torque - Nm [lb-in], Speed rpm									Intermittent Ratings - 10% of Operation
2 [0.5]	58 [509] 5	117 [1039] 4	253 [2236] 4						7	Theoretical rpm
4 [1]	58 [517] 12	122 [1081] 11	266 [2353] 11	384 [3396] 11	509 [4501] 9	633 [5599] 9			13	
8 [2]	58 [516] 25	128 [1134] 24	267 [2360] 24	404 [3572] 23	553 [4893] 22	683 [6045] 21	813 [7198] 20	917 [8112] 20	26	
15 [4]	56 [491] 50	132 [1173] 49	274 [2425] 49	417 [3691] 48	553 [4890] 47	703 [6225] 44	836 [7397] 43	962 [8513] 42	51	
23 [6]	53 [466] 75	123 [1092] 75	269 [2384] 74	406 [3590] 73	559 [4949] 71	701 [6207] 69	831 [7356] 66	954 [8445] 63	76	
30 [8]	44 [386] 100	117 [1036] 99	256 [2263] 97	419 [3710] 96	548 [4847] 95	707 [6256] 93	846 [7485] 88	974 [8619] 85	101	
38 [10]		107 [947] 126	251 [2222] 126	390 [3448] 125	561 [4961] 121	691 [6119] 119	836 [7396] 113	976 [8637] 109	127	
45 [12]		95 [841] 151	238 [2108] 150	400 [3538] 150	529 [4685] 149	696 [6160] 144	833 [7371] 140	969 [8573] 135	152	
53 [14]		84 [748] 176	232 [2053] 175	366 [3237] 174	530 [4688] 173	676 [5978] 168	825 [7302] 164	964 [8533] 158	177	
61 [16]		71 [629] 201	217 [1920] 200	370 [3277] 198	508 [4494] 197	654 [5786] 196	803 [7104] 187	952 [8428] 182	202	
68 [18]			202 [1792] 227	339 [2996] 226	503 [4448] 226	645 [5712] 221	781 [6914] 214	933 [8253] 211	228	
76 [20]				184 [1631] 252	326 [2887] 251	467 [4129] 249	635 [5619] 244	772 [6831] 236	927 [8205] 230	
83 [22]				164 [1449] 277	308 [2726] 275	446 [3943] 274	604 [5346] 271	745 [6592] 269	896 [7926] 267	
91 [24]				147 [1304] 302	286 [2535] 301	437 [3871] 300	580 [5137] 296	723 [6401] 293	861 [7620] 285	
95 [25]				116 [1024] 315	291 [2574] 314	441 [3902] 312	575 [5085] 310	707 [6255] 309	848 [7500] 302	
114 [30]					204 [1805] 378	347 [3067] 376	499 [4416] 370			

Rotor Width	Overall Efficiency -	70 - 100%	<input type="checkbox"/>	40 - 69%	<input checked="" type="checkbox"/>	0 - 39%	<input checked="" type="checkbox"/>	
Theoretical Torque - Nm [lb-in]								
25.4 [1.000]	82 [729]	165 [1457]	329 [2914]	494 [4371]	659 [5828]	823 [7285]	988 [8742]	1152 [10199]

mm [in]	Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]							
Pressure - bars [psi]								
350	17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	241 [3500]

348 cm ³ [21.2 in ³] / rev	Torque - Nm [lb-in], Speed rpm									Intermittent Ratings - 10% of Operation
Flow - lpm [gpm]	69 [606] 4	140 [1243] 3	262 [2318] 2						6	Theoretical rpm
Theoretical Torque - Nm [lb-in]										
2 [0.5]	75 [660] 10	153 [1350] 9	309 [2733] 7	454 [4014] 6					11	
4 [1]	75 [667] 21	158 [1395] 20	325 [2880] 17	489 [4326] 16	647 [5727] 14	784 [6937] 13	917 [8119] 11		22	
8 [2]	73 [648] 43	159 [1405] 42	333 [2943] 38	502 [4443] 36	677 [5988] 33	830 [7342] 31	984 [8704] 29	1123 [9935] 26	44	
15 [4]	67 [594] 65	152 [1346] 63	328 [2901] 61	502 [4439] 55	670 [5926] 51	841 [7444] 49	1010 [8940] 46	1155 [10220] 46	66	
23 [6]	56 [494] 87	143 [1268] 85	317 [2808] 83	494 [4368] 78	678 [6002] 72	833 [7376] 67	1018 [9010] 65	1172 [10367] 65	88	
30 [8]		129 [1141] 108	305 [2700] 105	477 [4219] 99	655 [5798] 92	830 [7345] 88	994 [8801] 85	1159 [10260] 83	109	
38 [10]		121 [1068] 130	291 [2578] 128	465 [4113] 122	641 [5672] 115	817 [7231] 107	991 [8766] 101	1169 [10342] 100	131	
45 [12]		103 [907] 151	275 [2437] 148	452 [4001] 145	630 [5572] 136	815 [7212] 130	972 [8604] 123	1162 [10284] 115	153	
53 [14]		85 [755] 174	258 [2281] 172	431 [3818] 168	609 [5390] 161	790 [6991] 152	983 [8696] 144	1141 [10099] 136	175	
61 [16]		66 [587] 196	246 [2174] 193	432 [3823] 190	583 [5161] 185	768 [6800] 171	944 [8355] 164	1131 [10012] 159	197	
68 [18]			223 [1969] 217	391 [3459] 211	568 [5026] 206	750 [6637] 196	925 [8186] 185	1101 [9742] 176	218	
76 [20]			193 [1704] 239	372 [3293] 236	545 [4825] 230	724 [6408] 219	909 [8049] 209	1092 [9666] 198	240	
83 [22]			169 [1492] 261	349 [3085] 257	537 [4755] 253	698 [6179] 243			262	
91 [24]				325 [2874] 272	507 [4491] 265	687 [6082] 254			273	
95 [25]				255 [2258] 326	429 [3796] 320	605 [5354] 315			327	
114 [30]										


Rotor Width	Overall Efficiency -	70 - 100%	<input type="checkbox"/>	40 - 69%	<input checked="" type="checkbox"/>	0 - 39%	<input checked="" type="checkbox"/>	
Theoretical Torque - Nm [lb-in]								
39.4 [1.553]	95 [844]	191 [1688]	381 [3376]	572 [5064]	763 [6752]	954 [8439]	1144 [10127]	1335 [11815]

Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DISPLACEMENT PERFORMANCE


Pressure - bar [psi]							Max. Cont.	Max. Inter.	
Flow - lpm [gpm]	375	17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	241 [3500]
375 cm³ [22.8 in³] / rev							Intermittent Ratings -		
Torque - Nm [lb-in], Speed rpm									
2 [0.5]		69 [611] 4							
4 [1]		74 [651] 9	161 [1425] 8	330 [2920] 8	494 [4369] 7	653 [5783] 6	823 [7283] 5		
8 [2]		76 [676] 20	173 [1527] 19	354 [3133] 18	518 [4582] 17	685 [6065] 15	860 [7611] 13	1021 [9038] 13	
15 [4]		73 [649] 40	158 [1399] 40	350 [3098] 38	535 [4731] 37	706 [6250] 34	883 [7814] 32	1032 [9130] 30	1191 [10541] 30
23 [6]		66 [588] 60	159 [1407] 60	346 [3058] 59	547 [4841] 57	712 [6300] 54	899 [7956] 49	1080 [9561] 47	1231 [10898] 45
30 [8]		57 [502] 81	147 [1301] 80	337 [2980] 79	537 [4749] 77	700 [6192] 74	888 [7948] 70	1088 [9628] 65	1236 [10941] 62
38 [10]			134 [1190] 101	323 [2856] 100	510 [4512] 99	694 [6139] 95	887 [7849] 90	1066 [9437] 85	1246 [11029] 79
45 [12]			124 [1097] 121	309 [2730] 120	496 [4385] 119	679 [6009] 114	883 [7817] 109	1073 [9493] 104	1244 [11010] 99
53 [14]			109 [961] 141	290 [2563] 140	477 [4217] 138	680 [6016] 136	854 [7556] 130	1041 [9214] 123	1230 [10888] 117
61 [16]			82 [728] 162	267 [2362] 161	453 [4005] 159	637 [5641] 157	846 [7489] 150	1041 [9209] 144	1209 [10702] 136
68 [18]				248 [2198] 182	434 [3842] 180	619 [5474] 175	812 [7190] 171	1002 [8864] 165	1148 [10161] 162
76 [20]				229 [2026] 202	416 [3685] 201	600 [5309] 199	790 [6994] 192	979 [8664] 183	1145 [10137] 180
83 [22]				199 [1764] 222	385 [3406] 221	572 [5065] 219	761 [6738] 215	953 [8435] 210	1111 [9834] 201
91 [24]				168 [1490] 243	362 [3204] 241	566 [5007] 240	731 [6471] 235		
95 [25]					347 [3073] 253	554 [4905] 250	721 [6384] 245		
114 [30]					261 [2314] 303	440 [3891] 301	623 [5514] 300		



Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

	Pressure - bar [psi]				Max. Cont.	Max. Inter.	
470	17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]

465 cm³ [28.3 in³] / rev							Intermittent Ratings - 10% of Operation		
Torque - Nm [lb-in]. Speed rpm									
Flow - lpm [gpm]	92 [815] 3	195 [1723] 2	374 [3306] 1				5		
4 [1]	109 [967] 7	188 [1661] 6	418 [3701] 5	615 [5447] 4			9		
8 [2]	99 [875] 15	217 [1924] 14	440 [3892] 13	668 [5910] 12	871 [7709] 9	1066 [9436] 7	1227 [10855] 5		17
15 [4]	93 [825] 32	213 [1887] 30	441 [3906] 29	688 [6086] 28	907 [8027] 25	1131 [10008] 22	1343 [11886] 18		33
23 [6]	85 [751] 48	200 [1771] 48	434 [3841] 46	686 [6074] 44	906 [8017] 40	1141 [10098] 35	1362 [12056] 30		49
30 [8]	72 [635] 65	186 [1645] 64	422 [3738] 63	659 [5834] 61	889 [7871] 58	1142 [10106] 50	1352 [11963] 45		66
38 [10]	53 [472] 81	169 [1493] 80	404 [3579] 79	639 [5657] 77	874 [7734] 74	1115 [9871] 66	1351 [11958] 59		82
45 [12]		152 [1348] 97	402 [3561] 96	608 [5377] 94	855 [7563] 89	1111 [9836] 82	1340 [11861] 76		98
53 [14]		133 [1175] 114	364 [3221] 113	598 [5292] 112	833 [7374] 107	1090 [9643] 98	1319 [11673] 90		115
61 [16]		103 [910] 130	333 [2947] 129	569 [5037] 128	803 [7110] 123	1063 [9410] 114	1294 [11450] 104		131
68 [18]		75 [661] 146	305 [2701] 144	555 [4908] 143	764 [6765] 141	1021 [9033] 133	1267 [11214] 124		147
76 [20]			281 [2489] 163	507 [4490] 162	745 [6597] 156	985 [8719] 150	1236 [10940] 141		164
83 [22]			227 [2011] 179	473 [4189] 178	714 [6322] 176	948 [8391] 168	1182 [10462] 162		180
91 [24]			193 [1705] 194	432 [3827] 192	687 [6079] 191	915 [8093] 186			196
95 [25]				423 [3743] 204	651 [5759] 201	896 [7928] 191			205
114 [30]				321 [2840] 244	538 [4761] 242	784 [6938] 238			245

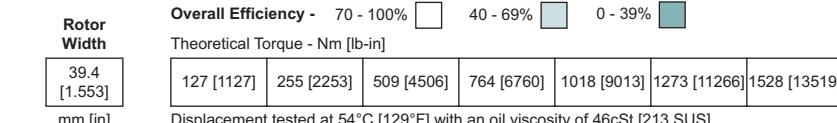


Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DR (All Series)

For Heavy Duty Applications

DISPLACEMENT PERFORMANCE

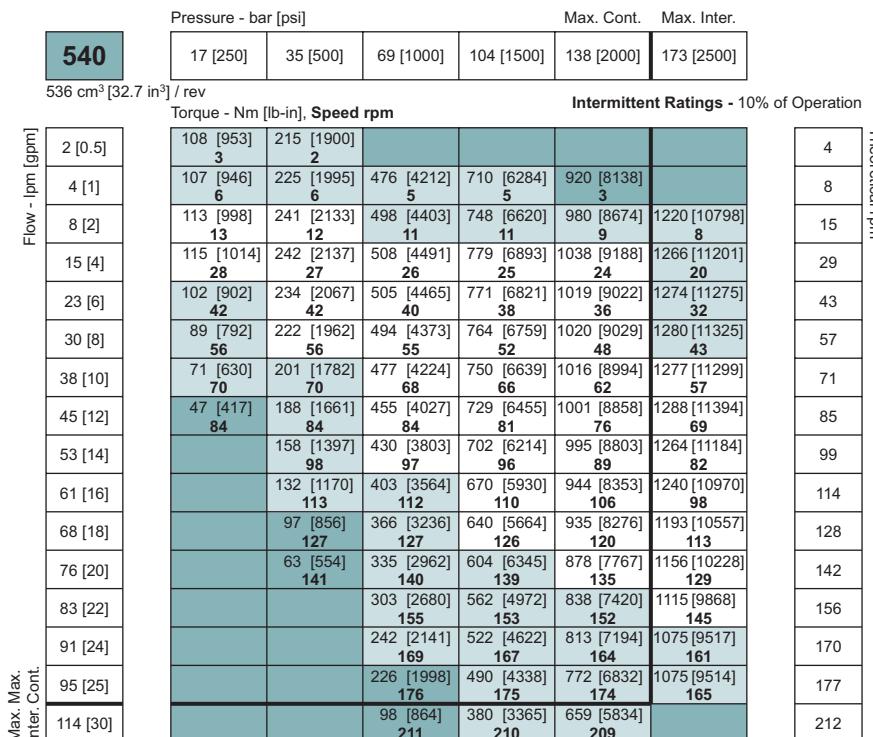

Overall Efficiency - 70 - 100% 40 - 69% 0 - 39%

Theoretical Torque - Nm [lb-in]

147 [1302]	294 [2604]	588 [5207]	883 [7811]	1177 [10414]	1471 [13018]
------------	------------	------------	------------	--------------	--------------

Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

Pressure - bar [psi]


Max. Cont.

Max. Inter.

17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]
----------	----------	-----------	------------	------------

748 cm³ [45.6 in³] / rev

Intermittent Ratings - 10% of Operation

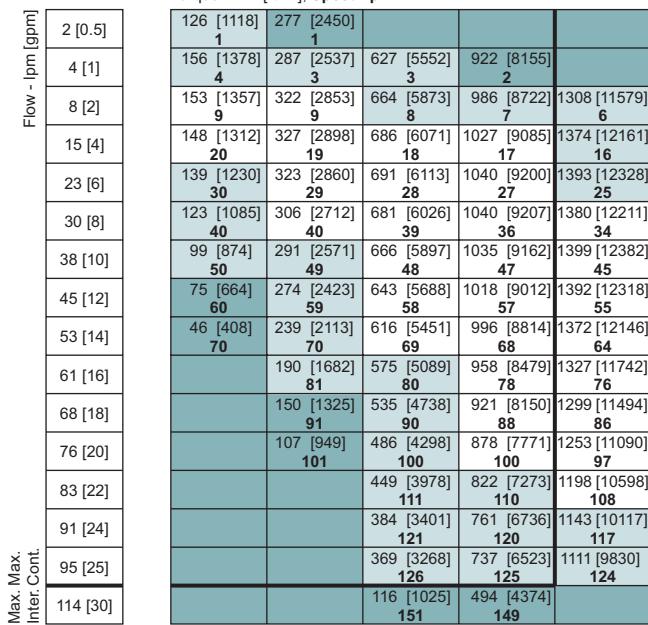

Overall Efficiency - 70 - 100% 40 - 69% 0 - 39%

Theoretical Torque - Nm [lb-in]

205 [1815]	410 [3631]	821 [7261]	1231 [10892]	1641 [14522]
------------	------------	------------	--------------	--------------



Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

PORTING



END PORTED - OFFSET

STANDARD

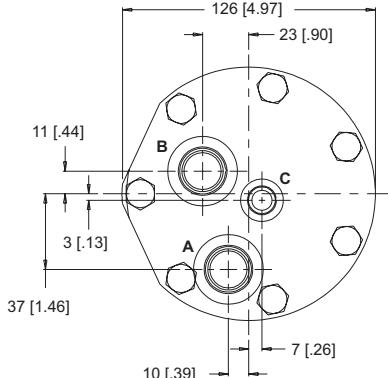

1 Main Ports **A, B:** 7/8-14 UNF
Drain Port **C:** 7/16-20 UNF



OPTIONAL

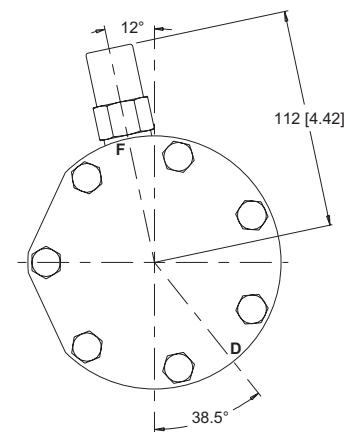

D: Internal Drain E: 10 Series/2-Way Valve Cavity 7/8-14 UNF F: Valve Cartridge Installed


SIDE PORTED - RADIAL

STANDARD

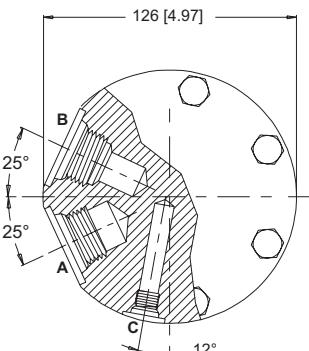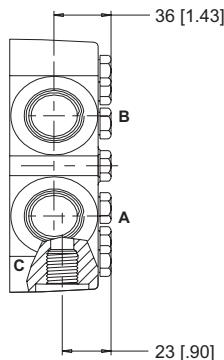


2 Main Ports **A, B:** G 3/4
Drain Port **C:** G 1/4

OPTIONAL



5 Main Ports **A, B:** 1 1/16-12 UN
Drain Port **C:** 7/16-20 UNF

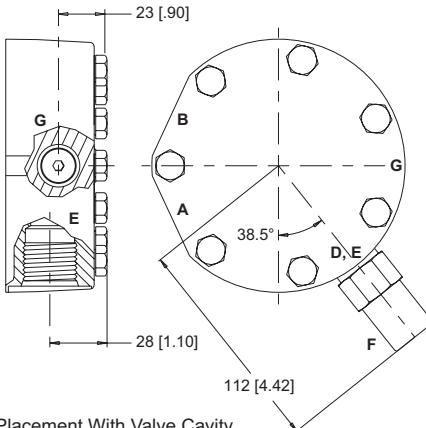

D: Internal Drain E: 10 Series/2-Way Valve Cavity 7/8-14 UNF F: Valve Cartridge Installed G: Internal Drain Placement With Valve Cavity

DR (All Series)

For Heavy Duty Applications


PORTING

SIDE PORTED - MANIFOLD ALIGNED



3

Main Ports **A, B:** 11/16" Drilled
Drain Port **C:** 7/16-20 UNF

STANDARD

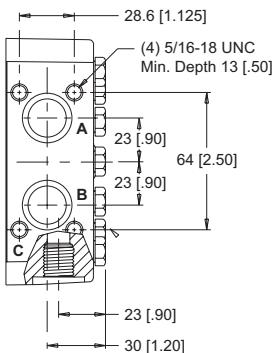

OPTIONAL





D: Internal Drain

SIDE PORTED - ALIGNED


6

Main Ports **A, B:** 1 1/16-12 UN
Drain Port **C:** 7/16-20 UNF

STANDARD

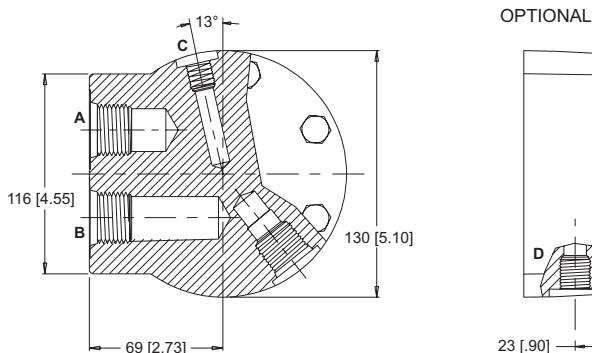


OPTIONAL



7


Main Ports **A, B:** G 3/4
Drain Port **C:** G 1/4

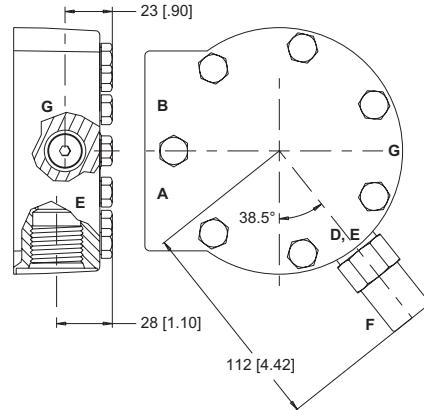


D: Internal Drain E: 10 Series/2-Way Valve Cavity 7/8-14 UNF F: Valve Cartridge Installed G: Internal Drain Placement With Valve Cavity

HOUSINGS


4-HOLE, MAGNETO MOUNT

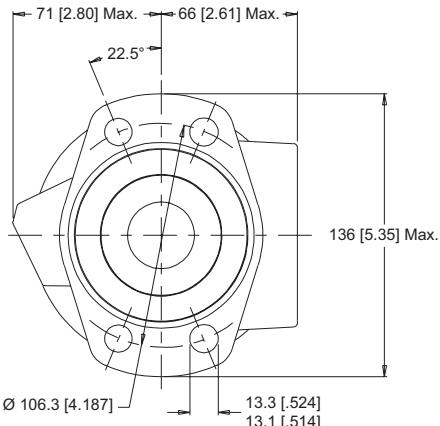


A2 End Ports **A8** Side Ports

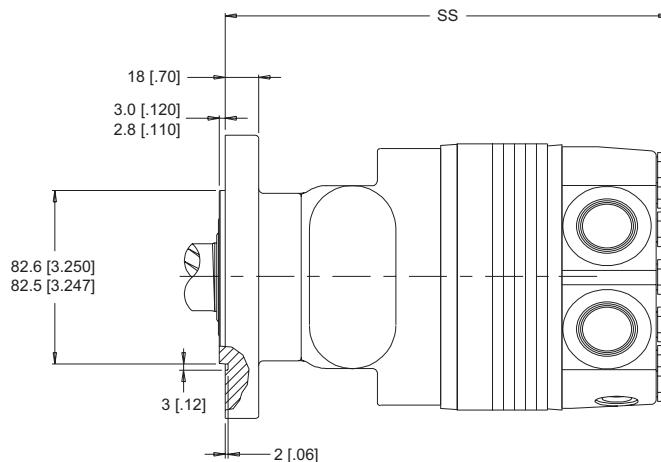


6-HOLE, SAE A MOUNT

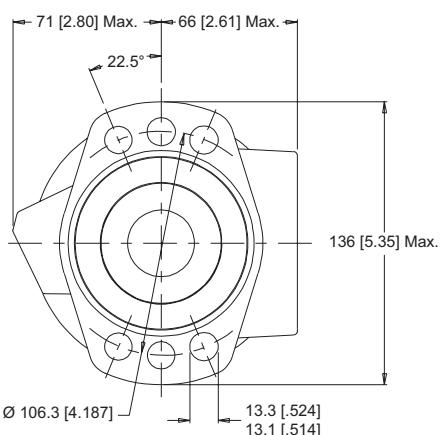


A4 End Ports **A9** Side Ports

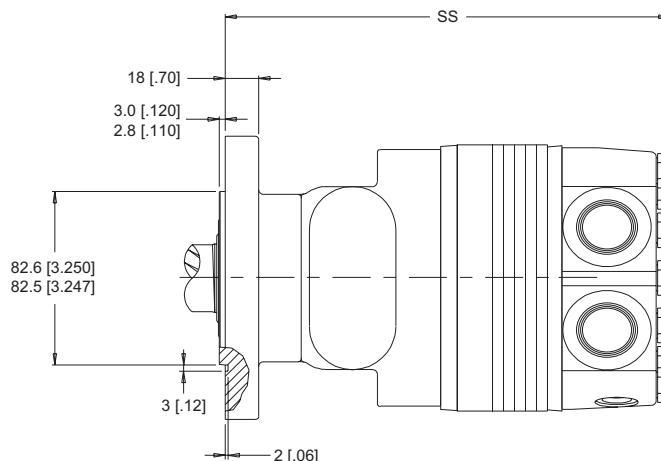

4-HOLE, WHEEL MOUNT

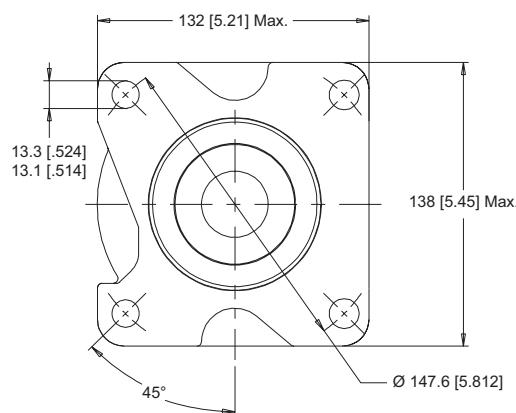

W2 End Ports **W8** Side Ports

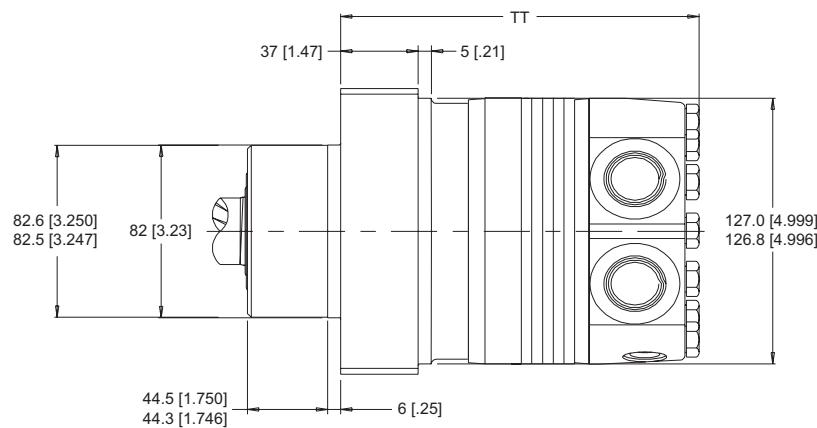

► Dimensions SS & TT are charted on page 24. Porting options listed on pages 21-22.

DR (600 Series)


Heavy Duty Hydraulic Motor

TECHNICAL INFORMATION


ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve represents allowable bearing loads based on ISO 281 bearing capacity for an L_{10} life of 2,000 hours at 100 rpm. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor table on page 7.

MAGNETO & SAE A MOUNTS

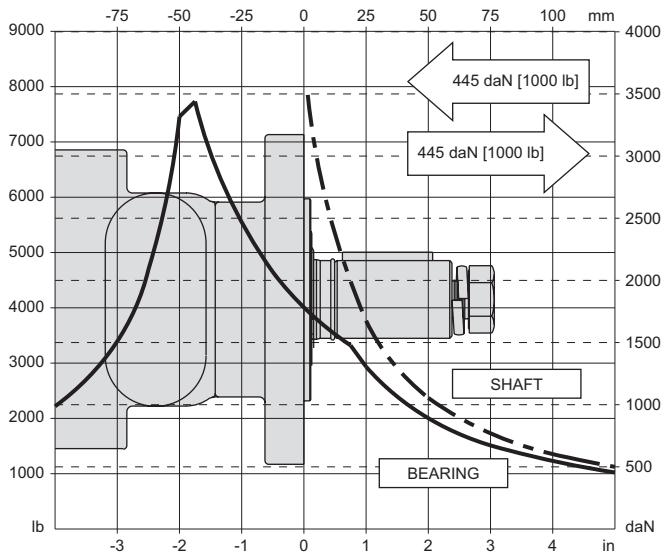

WHEEL MOUNTS

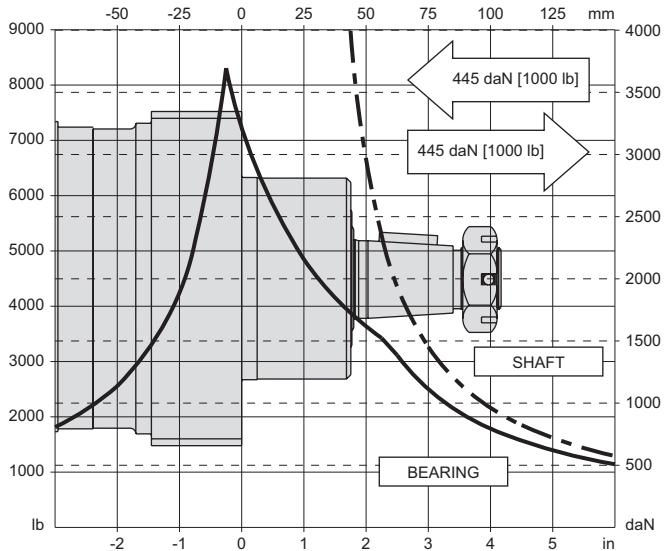

LENGTH & WEIGHT CHART

Dimensions SS & TT are the overall motor lengths from the rear of the motor to the mounting flange surface and are referenced on detailed housing drawings listed on page 23.

SS	Endcovers on pg. 21	Endcovers on pg. 22	Weight
#	mm [in]	mm [in]	kg [lb]
200	205 [8.08]	208 [8.19]	13.4 [29.6]
260	210 [8.26]	213 [8.37]	13.9 [30.6]
300	213 [8.39]	216 [8.50]	14.6 [32.2]
350	227 [8.95]	230 [9.06]	15.7 [34.7]
375	219 [8.75]	222 [8.75]	15.2 [33.4]
470	227 [8.95]	230 [9.06]	15.7 [34.7]
540	233 [9.18]	236 [9.29]	16.2 [35.8]
750	251 [9.89]	254 [10.00]	17.7 [39.1]

TT	Endcovers on pg. 21	Endcovers on pg. 22	Weight
#	mm [in]	mm [in]	kg [lb]
200	163 [6.42]	166 [6.53]	15.9 [35.0]
260	168 [6.61]	171 [6.72]	16.3 [36.0]
300	171 [6.74]	174 [6.85]	16.6 [36.6]
350	185 [7.29]	188 [7.40]	17.8 [39.2]
375	177 [6.99]	180 [7.10]	17.1 [37.8]
470	185 [7.29]	188 [7.40]	17.8 [39.2]
540	191 [7.53]	194 [7.64]	18.3 [40.3]
750	209 [8.24]	212 [8.35]	19.7 [43.5]

► All DR series motor weights can vary ± 0.9 kg [2 lb] depending on model configurations such as housing, shaft, endcover, options etc.

SHAFTS

02	1" 6B Spline	03	1" 6B Spline Extended	10	1" Straight	15	1" Straight Extended
6B Spline SAE J499 Standard				Max. Torque: 678 Nm [6000 lb-in]	Max. Torque: 655 Nm [5800 lb-in]		
07	1-1/4" Straight Extended	20	1-1/4" Straight	12	25mm Straight		
				Max. Torque: 1200 Nm [10600 lb-in]	Max. Torque: 678 Nm [6000 lb-in]		
08	32mm Straight Extended	21	32mm Straight	22	1-1/4" Tapered	25	1-1/4" Tapered Extended
				Max. Torque: 1200 Nm [10600 lb-in]	Max. Torque: 1200 Nm [10600 lb-in]		► A slotted hex nut is standard on this shaft.
09	14 Tooth Spline Extended	23	14 Tooth Spline	MOUNTING / SHAFT LENGTH CHART			
				Dimension UU is the overall distance from the motor mounting surface to the end of the shaft and is referenced on detailed shaft drawings above.			
Max. Torque: 1200 Nm [10600 lb-in]							► Shaft lengths vary ± 0.8 mm [.030 in.]

UU	Magneto & A Mounts	Wheel Mounts
#	mm [in]	mm [in]
02	50 [1.97]	91 [3.60]
03	76 [3.01]	118 [4.64]
07	88 [3.45]	129 [5.09]
08	88 [3.45]	129 [5.09]
09	88 [3.45]	129 [5.09]
10	50 [1.97]	91 [3.60]
12	56 [2.21]	98 [3.84]
15	76 [3.01]	118 [4.64]
20	61 [2.41]	103 [4.05]
21	61 [2.41]	103 [4.05]
22	66 [2.58]	107 [4.22]
23	61 [2.41]	103 [4.05]
25	92 [3.62]	134 [5.26]

DR (600 Series)


Heavy Duty Hydraulic Motor

ORDERING INFORMATION



1. CHOOSE SERIES DESIGNATION

600 Standard Motor

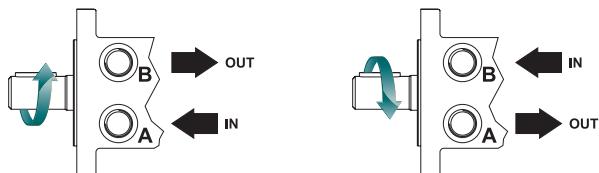

► The 600 series is bi-directional. Reversing the inlet hose will reverse shaft rotation.

2. SELECT A DISPLACEMENT OPTION

200	204 cm ³ /rev [12.4 in ³ /rev]	375	375 cm ³ /rev [22.8 in ³ /rev]
260	261 cm ³ /rev [15.9 in ³ /rev]	470	465 cm ³ /rev [28.3 in ³ /rev]
300	300 cm ³ /rev [18.3 in ³ /rev]	540	536 cm ³ /rev [32.7 in ³ /rev]
350	348 cm ³ /rev [21.2 in ³ /rev]	750	748 cm ³ /rev [45.6 in ³ /rev]

3a. SELECT MOUNT TYPE

▼ END MOUNTS	
A2	4-Hole, Magneto Mount
A4	6-Hole, SAE A Mount
W2	4-Hole, Wheel Mount
▼ SIDE MOUNTS	
A8	4-Hole, Magneto Mount
A9	6-Hole, SAE A Mount
W8	4-Hole, Wheel Mount

► Speed sensor option is not available on wheel mounts.

4. SELECT A SHAFT OPTION

02	1" 6B Spline	15	1" Straight Extended
03	1" 6B Spline Extended	20	1-1/4" Straight
07	1-1/4" Straight Extended	21	32mm Straight
08	32mm Straight Extended	22	1-1/4" Tapered
09	14 Tooth Spline Extended	23	14 Tooth Spline
10	1" Straight	25	1-1/4" Tapered Extended
12	25mm Straight		

► Extended shafts are designed for use with one of the speed sensor options listed in STEP 7.

5. SELECT A PAINT OPTION

A	Black
B	Black, Unpainted Mounting Surface
Z	No Paint

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

A	None	F	121 bar [1750 psi] Relief
B	Valve Cavity Only	G	138 bar [2000 psi] Relief
C	69 bar [1000 psi] Relief	J	173 bar [2500 psi] Relief
D	86 bar [1250 psi] Relief	L	207 bar [3000 psi] Relief
E	104 bar [1500 psi] Relief		

► Valve cavity is not available on port option 3.

7. SELECT AN ADD-ON OPTION


A	Standard
B	Lock Nut
C	Solid Hex Nut
W	Speed Sensor, Dual, 4-Pin Male Weatherpack Connector
X	Speed Sensor, Dual, 4-Pin M12 Male Connector
Y	Speed Sensor, Single, 3-Pin Male Weatherpack Connector
Z	Speed Sensor, Single, 4-Pin M12 Male Connector

8. SELECT A MISCELLANEOUS OPTION


AA	None
AB	Internal Drain
AC	Freeturning Rotor
AD	Internal Drain & Freeturning Rotor

HOUSINGS

6-HOLE, SAE A MOUNT

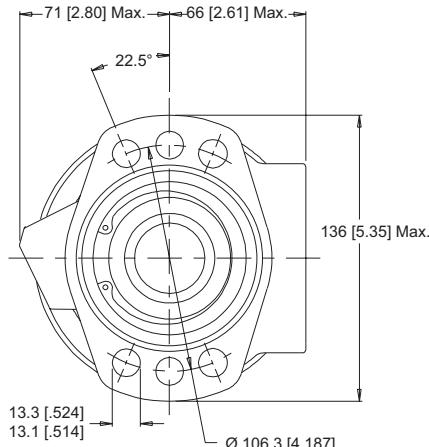

A4 End Ports **A9** Side Ports

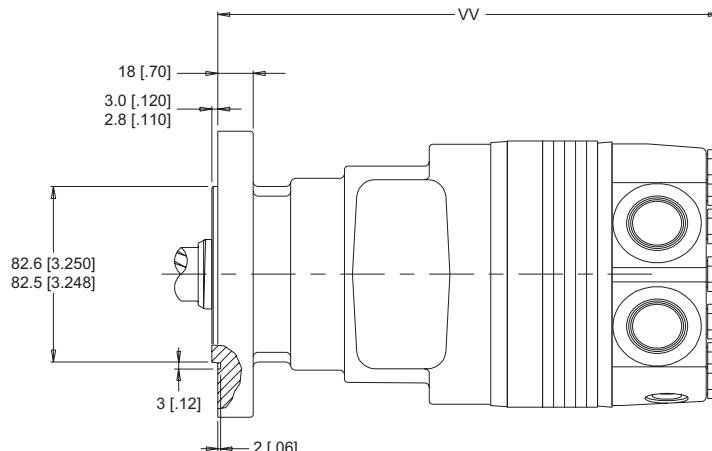


► Porting options listed on pages 54-55.

TECHNICAL INFORMATION

ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve represents allowable bearing loads based on ISO 281 bearing capacity for an L_{10} life of 2,000 hours at 100 rpm. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor table on page 7.

SAE A MOUNTS

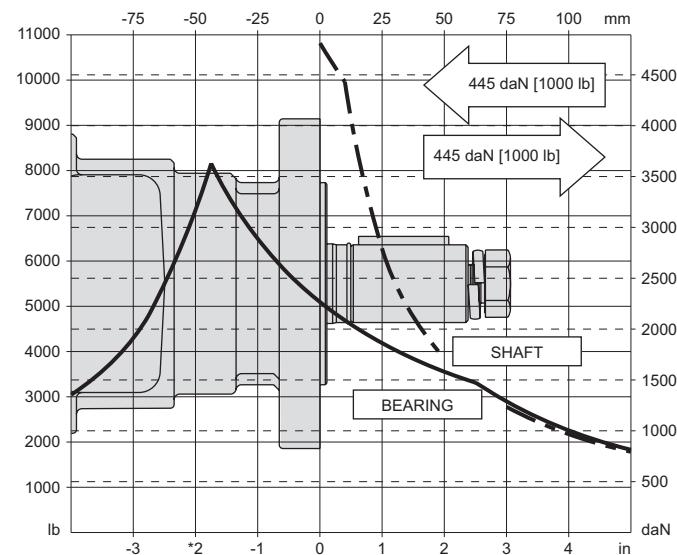

LENGTH & WEIGHT CHART

Dimension VV is the overall motor length from the rear of the motor to the mounting flange surface and are referenced on detailed housing drawings listed above.

VV	Endcovers on pg. 21	Endcovers on pg. 22	Weight
#	mm [in]	mm [in]	kg [lb]
200	231 [9.08]	234 [9.19]	16.1 [35.4]
260	235 [9.27]	238 [9.38]	16.2 [35.6]
300	239 [9.40]	242 [9.51]	16.9 [37.2]
350	253 [9.95]	256 [10.06]	18.0 [39.6]
375	245 [9.65]	248 [9.76]	17.4 [38.3]
470	253 [9.95]	256 [10.06]	18.0 [39.6]
540	259 [10.19]	262 [10.30]	18.5 [40.7]
750	277 [10.90]	280 [11.01]	20.0 [44.0]


► All DR series motor weights can vary ± 0.9 kg [2 lb] depending on model configurations such as housing, shaft, endcover, options etc.

DR (620 Series)

Heavy Duty Hydraulic Motor


SHAFTS

03 1" 6B Spline

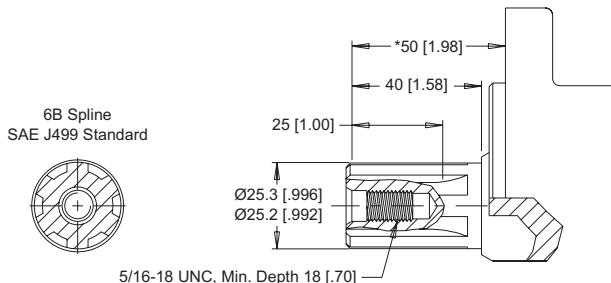


Max. Torque: 678 Nm [6000 lb-in]

09 14 Tooth Spline

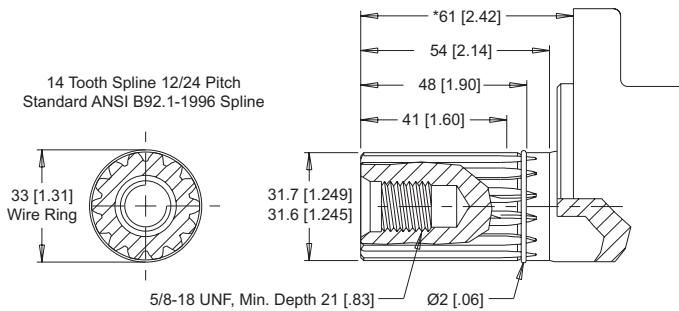


Max. Torque: 1200 Nm [10600 lb-in]

07 1-1/4" Straight

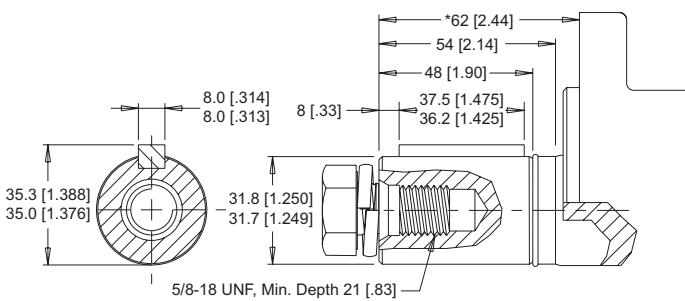


Max. Torque: 1200 Nm [10600 lb-in]

15 1" Straight

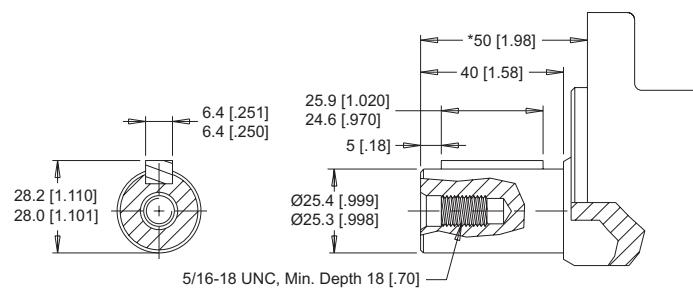


Max. Torque: 655 Nm [5800 lb-in]

08 32mm Straight

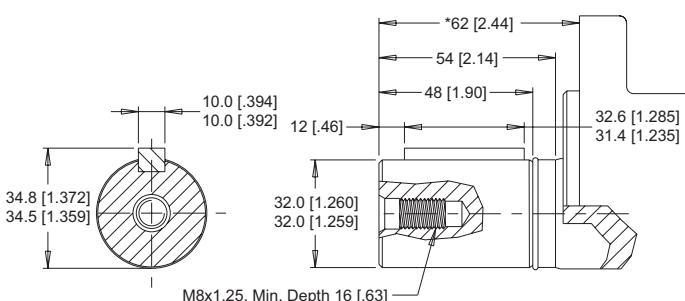

Max. Torque: 1200 Nm [10600 lb-in]

25 1-1/4" Tapered

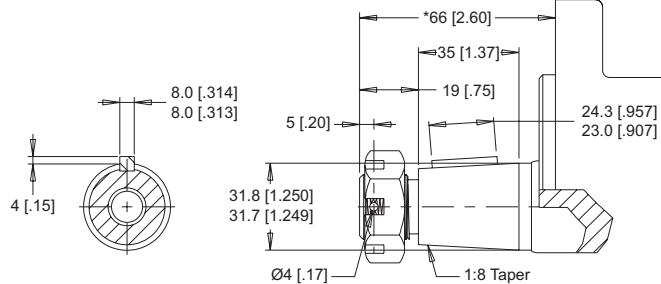


Max. Torque: 1200 Nm [10600 lb-in]

► *Shaft lengths vary ± 0.8 mm [.030 in.]


► A slotted hex nut is standard on this shaft.

ORDERING INFORMATION



1. CHOOSE SERIES DESIGNATION

620 Hydraulic Motor With Medium Duty Bearing

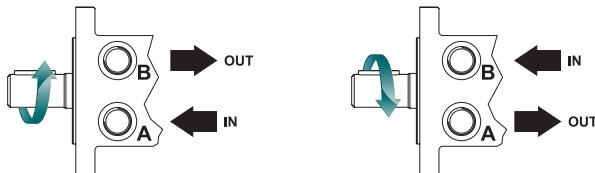

► The 620 series is bi-directional. Reversing the inlet hose will reverse shaft rotation.

2. SELECT A DISPLACEMENT OPTION

200	204 cm ³ /rev [12.4 in ³ /rev]	375	375 cm ³ /rev [22.8 in ³ /rev]
260	261 cm ³ /rev [15.9 in ³ /rev]	470	465 cm ³ /rev [28.3 in ³ /rev]
300	300 cm ³ /rev [18.3 in ³ /rev]	540	536 cm ³ /rev [32.7 in ³ /rev]
350	348 cm ³ /rev [21.2 in ³ /rev]	750	748 cm ³ /rev [45.6 in ³ /rev]

3a. SELECT MOUNT TYPE

▼ END MOUNTS
A4 6-Hole, SAE A Mount
▼ SIDE MOUNTS


A9	6-Hole, SAE A Mount
----	---------------------

3b. SELECT PORT SIZE

▼ END PORT OPTIONS
1 7/8-14 UNF Offset
▼ SIDE PORT OPTIONS
2 G 3/4, Radial
3 11/16" Hole, Aligned Manifold
5 1 1/16-12 UN, Radial
6 1 1/16-12 UN, Aligned
7 G 3/4, Radial

4. SELECT A SHAFT OPTION

03	1" 6B Spline	09	14 Tooth Spline
07	1-1/4" Straight	15	1" Straight
08	32mm Straight	25	1-1/4" Tapered



5. SELECT A PAINT OPTION

A	Black
B	Black, Unpainted Mounting Surface
Z	No Paint

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

A	None	F	121 bar [1750 psi] Relief
B	Valve Cavity Only	G	138 bar [2000 psi] Relief
C	69 bar [1000 psi] Relief	J	173 bar [2500 psi] Relief
D	86 bar [1250 psi] Relief	L	207 bar [3000 psi] Relief
E	104 bar [1500 psi] Relief		

► Valve cavity is not available on port option 3.

7. SELECT AN ADD-ON OPTION

A	Standard
B	Lock Nut
C	Solid Hex Nut

8. SELECT A MISCELLANEOUS OPTION

AA	None
AB	Internal Drain
AC	Freeturning Rotor
AD	Internal Drain & Freeturning Rotor

DR (630 Series)



Heavy Duty Hydraulic Motor

HOUSINGS

4-HOLE, WHEEL MOUNT

► Dimensions shown are without paint. Paint thickness can be up to 0.13 [.005].

W2 End Ports **W8** Side Ports

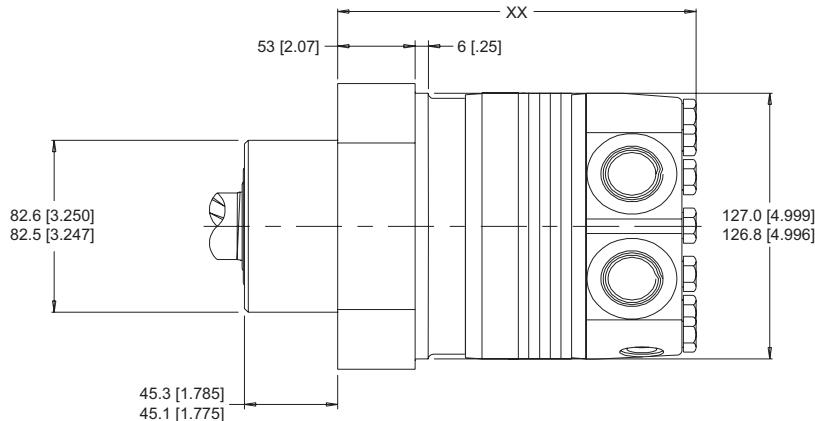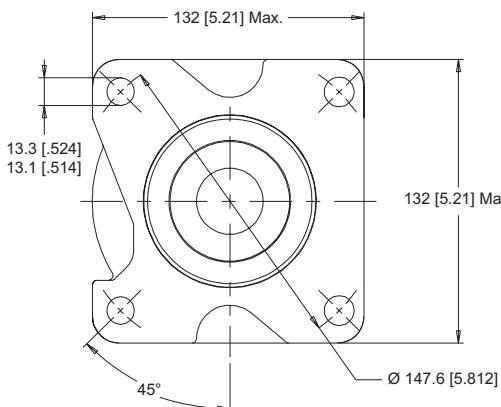


► Porting options listed on pages 21-22.

TECHNICAL INFORMATION

ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve represents allowable bearing loads based on ISO 281 bearing capacity for an L_{10} life of 2,000 hours at 100 rpm. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor table on page 7.

WHEEL MOUNTS

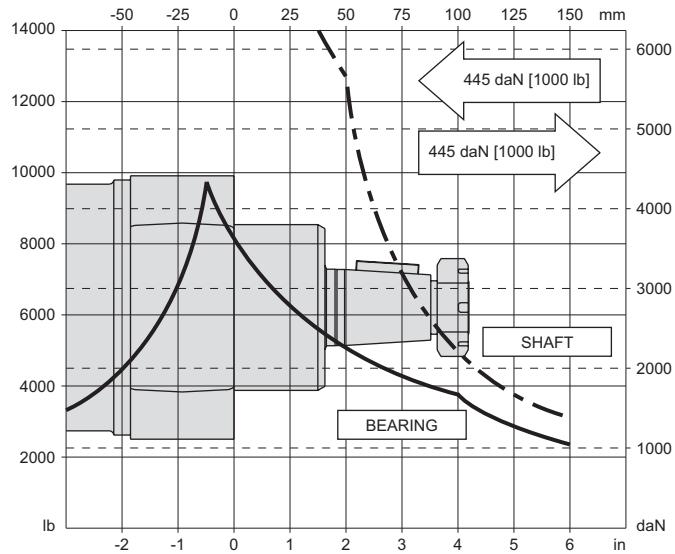

LENGTH & WEIGHT CHART


Dimension XX is the overall motor length from the rear of the motor to the mounting flange surface and are referenced on detailed housing drawings listed above.

XX	Endcovers on pg. 21	Endcovers on pg. 22	Weight
#	mm [in]	mm [in]	kg [lb]
200	199 [7.75]	202 [7.86]	17.5 [38.5]
260	204 [8.04]	207 [8.15]	17.9 [39.5]
300	207 [8.17]	210 [8.28]	18.2 [40.1]
350	221 [8.72]	224 [8.83]	19.3 [42.6]
375	214 [8.42]	217 [8.53]	18.7 [41.2]
470	221 [8.72]	224 [8.83]	19.3 [42.6]
540	227 [8.96]	230 [9.07]	19.8 [43.7]
750	245 [9.67]	248 [9.78]	21.3 [47.0]

► All DR series motor weights can vary ± 0.9 kg [2 lb] depending on model configurations such as housing, shaft, endcover, options etc.


SHAFTS

28 35mm Tapered

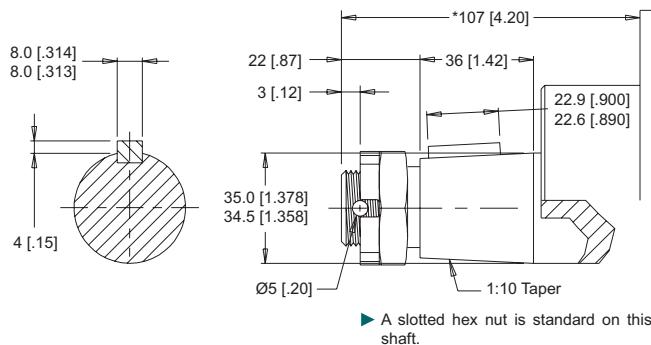


Max. Torque: 1200 Nm [10600 lb-in]

30 1-1/2" Straight

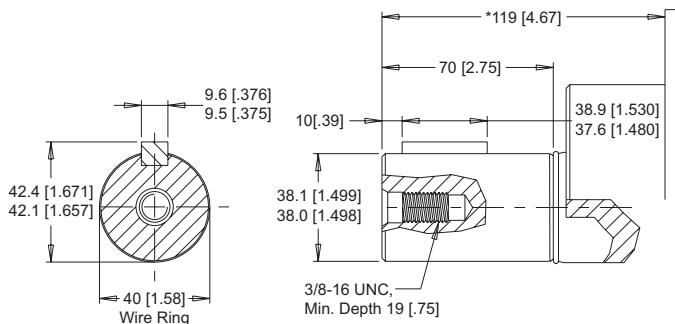

Max. Torque: 1200 Nm [10600 lb-in]

31 1-1/2" Tapered

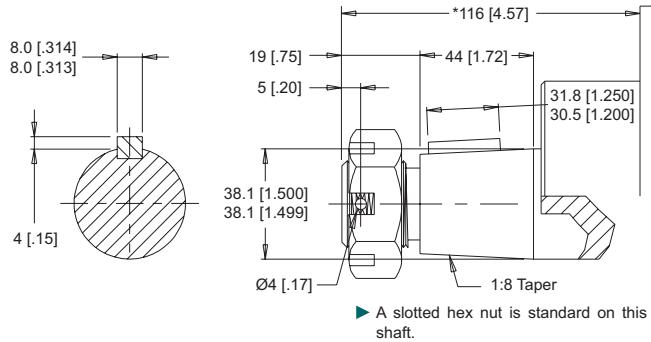

Max. Torque: 1200 Nm [10600 lb-in]

► *Shaft lengths vary ± 0.8 mm [.030 in.]

DR (630 Series)


Heavy Duty Hydraulic Motor

ORDERING INFORMATION



1. CHOOSE SERIES DESIGNATION

630 Hydraulic Motor With Heavy Duty Bearing

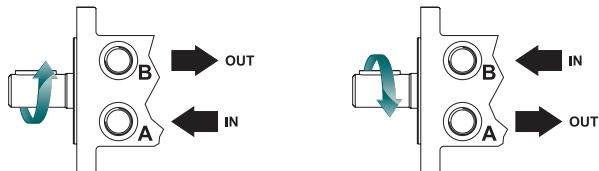

► The 630 series is bi-directional. Reversing the inlet hose will reverse shaft rotation.

2. SELECT A DISPLACEMENT OPTION

200	204 cm ³ /rev [12.4 in ³ /rev]	375	375 cm ³ /rev [22.8 in ³ /rev]
260	261 cm ³ /rev [15.9 in ³ /rev]	470	465 cm ³ /rev [28.3 in ³ /rev]
300	300 cm ³ /rev [18.3 in ³ /rev]	540	536 cm ³ /rev [32.7 in ³ /rev]
350	348 cm ³ /rev [21.2 in ³ /rev]	750	748 cm ³ /rev [45.6 in ³ /rev]

3a. SELECT MOUNT TYPE

▼ END MOUNTS
W2 4-Hole, Wheel Mount
▼ SIDE MOUNTS
W8 4-Hole, Wheel Mount

3b. SELECT PORT SIZE

▼ END PORT OPTIONS
1 7/8-14 UNF Offset
▼ SIDE PORT OPTIONS
2 G 3/4, Radial
3 11/16" Hole, Aligned Manifold
5 1 1/16-12 UN, Radial
6 1 1/16-12 UN, Aligned
7 G 3/4, Radial

4. SELECT A SHAFT OPTION

28	35mm Tapered
30	1-1/2" Straight
31	1-1/2" Tapered



5. SELECT A PAINT OPTION

A	Black
B	Black, Unpainted Mounting Surface
Z	No Paint

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

A	None	F	121 bar [1750 psi] Relief
B	Valve Cavity Only	G	138 bar [2000 psi] Relief
C	69 bar [1000 psi] Relief	J	173 bar [2500 psi] Relief
D	86 bar [1250 psi] Relief	L	207 bar [3000 psi] Relief
E	104 bar [1500 psi] Relief		

► Valve cavity is not available on port option 3.

7. SELECT AN ADD-ON OPTION


A	Standard
B	Lock Nut
C	Solid Hex Nut

8. SELECT A MISCELLANEOUS OPTION


AA	None
AB	Internal Drain
AC	Freeturning Rotor
AD	Internal Drain & Freeturning Rotor

HOUSINGS

4-HOLE, WHEEL HUB MOUNT

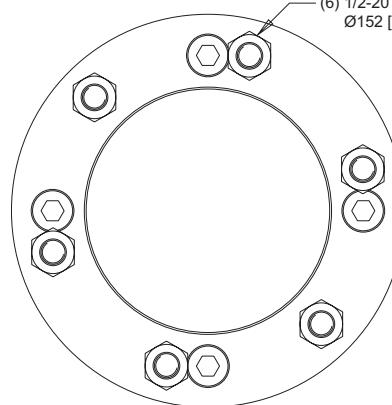



W2 End Ports **W8** Side Ports

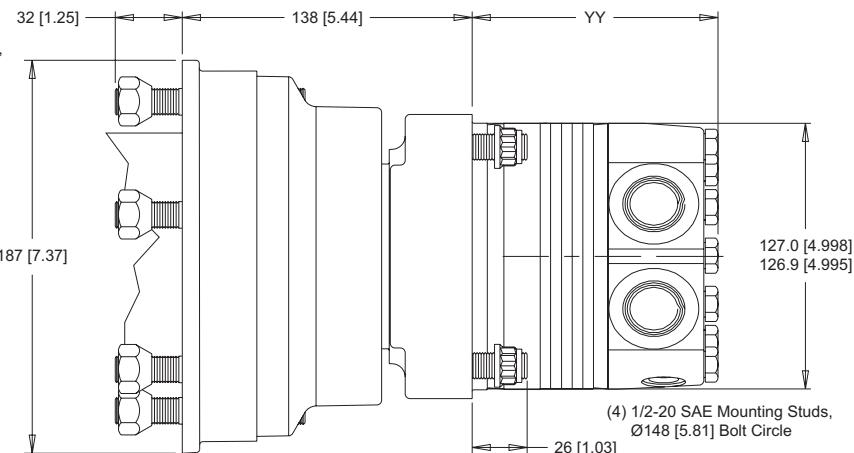



► Dimension YY is charted on page 34. Porting options listed on pages 21-22.

HUB OPTION DETAILS

STANDARD HUB

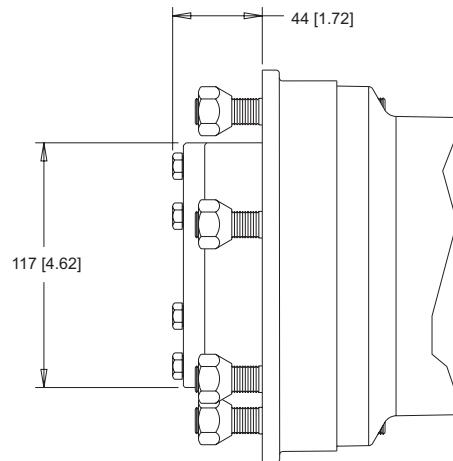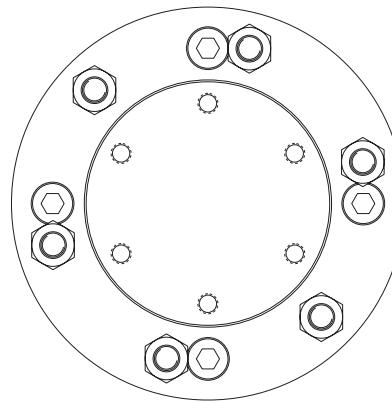

LOCKING HUB

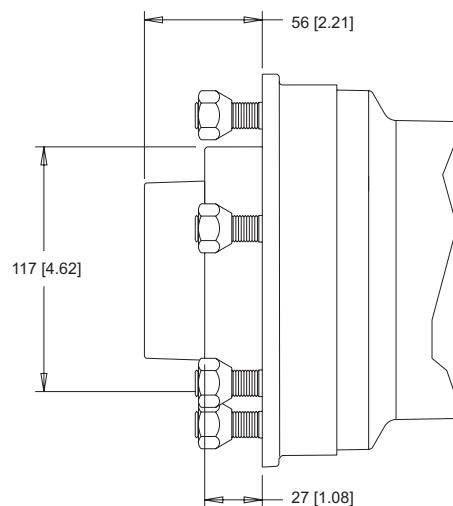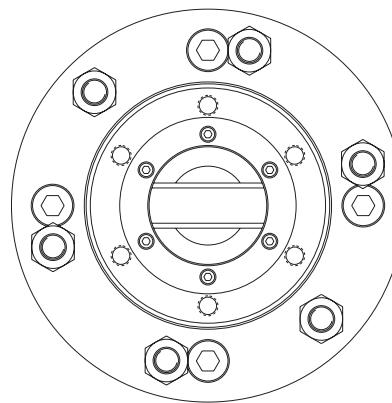

DR (640 Series)

Heavy Duty Hydraulic Motor

TECHNICAL INFORMATION

ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve represents allowable bearing loads based on ISO 281 bearing capacity for an L_{10} life of 2,000 hours at 100 rpm. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor table on page 7.


LENGTH & WEIGHT CHART

Dimension YY is the overall motor length from the rear of the motor to the mounting flange surface and are referenced on detailed housing drawings listed on page 33.


► All DR series motor weights can vary ± 0.9 kg [2 lb] depending on model configurations such as housing, shaft, endcover, options etc.

YY	Endcovers on pg. 21	Endcovers on pg. 22	Weight
#	mm [in]	mm [in]	kg [lb]
200	109 [4.31]	112 [4.42]	24.4 [53.9]
260	114 [4.50]	117 [4.61]	24.8 [54.7]
300	117 [4.63]	120 [4.74]	25.2 [55.5]
350	131 [5.18]	134 [5.29]	26.3 [57.9]
375	124 [4.88]	127 [4.99]	25.7 [56.7]
470	131 [5.18]	134 [5.29]	26.3 [57.9]
540	138 [5.42]	141 [5.53]	26.8 [59.1]
750	156 [6.21]	159 [6.24]	28.2 [62.2]

WHEEL HUB MOUNTS

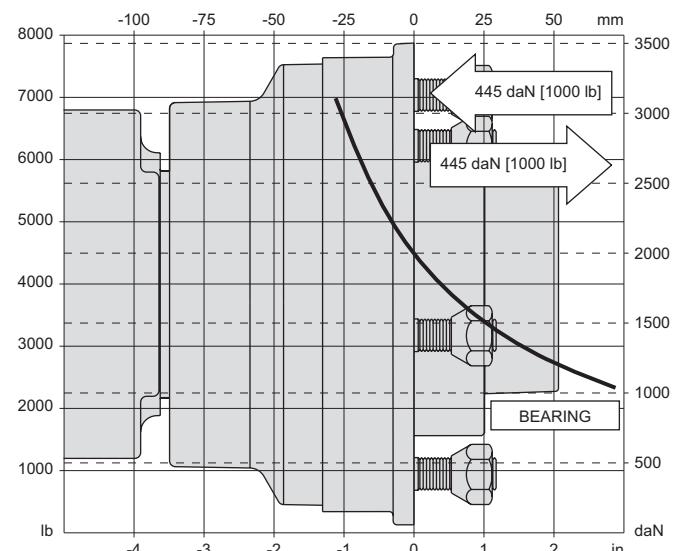


ORDERING INFORMATION



1. CHOOSE SERIES DESIGNATION

640 Hydraulic Motor With Wheel Hub

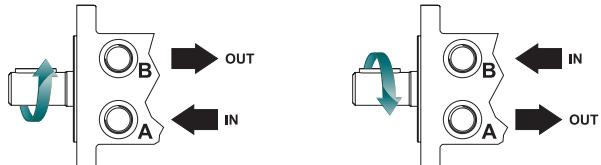

► The 640 series is bi-directional. Reversing the inlet hose will reverse shaft rotation.

2. SELECT A DISPLACEMENT OPTION

200	204 cm ³ /rev [12.4 in ³ /rev]	375	375 cm ³ /rev [22.8 in ³ /rev]
260	261 cm ³ /rev [15.9 in ³ /rev]	470	465 cm ³ /rev [28.3 in ³ /rev]
300	300 cm ³ /rev [18.3 in ³ /rev]	540	536 cm ³ /rev [32.7 in ³ /rev]
350	348 cm ³ /rev [21.2 in ³ /rev]	750	748 cm ³ /rev [45.6 in ³ /rev]

3a. SELECT MOUNT TYPE

▼ END MOUNTS
W2 4-Hole, Wheel Mount


▼ SIDE MOUNTS
W8 4-Hole, Wheel Mount

3b. SELECT PORT SIZE

▼ END PORT OPTIONS	▼ SIDE PORT OPTIONS
1 7/8-14 UNF Offset	
	▼ SIDE PORT OPTIONS
2 G 3/4, Radial	2 G 3/4, Radial
3 11/16" Hole, Aligned Manifold	3 11/16" Hole, Aligned Manifold
5 1 1/16-12 UN, Radial	5 1 1/16-12 UN, Radial
6 1 1/16-12 UN, Aligned	6 1 1/16-12 UN, Aligned
	7 G 3/4, Radial

4. SELECT A SHAFT OPTION

61 6-Bolt Wheel Flange



5. SELECT A PAINT OPTION

A Black
Z No Paint

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

A	None	F	121 bar [1750 psi] Relief
B	Valve Cavity Only	G	138 bar [2000 psi] Relief
C	69 bar [1000 psi] Relief	J	173 bar [2500 psi] Relief
D	86 bar [1250 psi] Relief	L	207 bar [3000 psi] Relief
E	104 bar [1500 psi] Relief		

► Valve cavity is not available on port option 3.

7. SELECT AN ADD-ON OPTION

A Standard
H Locking Hub

8. SELECT A MISCELLANEOUS OPTION


AA None
AB Internal Drain
AC Freeturning Rotor
AD Internal Drain & Freeturning Rotor

OVERVIEW


The most amazing aspect of the DT Series motor is its huge torque potential from its relatively small size. The DT Series motor is capable of producing output torque comparable to competitive designs, but from a package that is both shorter and lighter. The savings in space and weight in no way compromises durability, as the motor uses massive shafts, bearings and drive links to transmit the torque produced by this powerful package. The use of a case drain allows reduced pressure on the shaft seal while maintaining drive-line lubrication for maximum motor life. Standard mounting and shaft options offer interchangeability with competitive designs. An internal drain option is also available.

SERIES DESCRIPTIONS

700 - Hydraulic Motor Standard

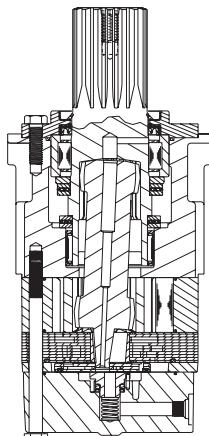

740 - Hydraulic Motor With Wheel Hub

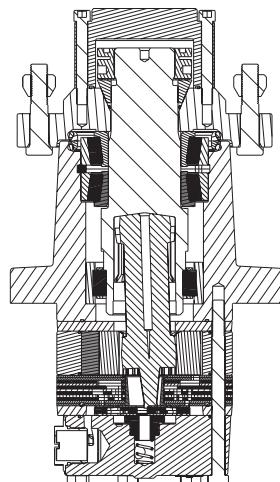

FEATURES / BENEFITS

- Heavy-Duty Roller Bearing supports high side loads and receives forced lubrication for cooling and increased life.
- Compact Housing contributes to high power-to-weight ratio of motor and offers front and rear mounting flanges.
- Heavy-Duty Drive Link receives forced lubrication for long life and is capable of extreme duty cycles.
- Roller Stator® Motor available in displacements up to 2093 cm³ [127.7 in³] for high torque output.
- Three-Zone Orbiting Valve precisely meters oil to produce exceptional volumetric efficiencies.

TYPICAL APPLICATIONS

Heavy-duty wheel drives, augers, mixers, pumping units, conveyors, boring machines, rotators, mining equipment, forestry equipment and more and more

SPECIFICATIONS

CODE	Displacement cm ³ [in ³ /rev]	Max. Speed rpm		Max. Flow lpm [gpm]		Max. Torque Nm [lb-in]		Max. Pressure bar [psi]		
		cont.	inter.	cont.	inter.	cont.	inter.	cont.	inter.	peak
300	300 [18.3]	320	380	95 [25]	114 [30]	819 [7250]	955 [8450]	207 [3000]	241 [3500]	259 [3750]
375	374 [22.8]	250	300	95 [25]	114 [30]	1045 [9250]	1127 [9975]	207 [3000]	224 [3250]	241 [3500]
470	464 [28.3]	200	240	95 [25]	114 [30]	1071 [9475]	1390 [12300]	172 [2500]	224 [3250]	241 [3500]
540	536 [32.7]	180	210	95 [25]	114 [30]	1277 [11300]	1525 [13500]	172 [2500]	207 [3000]	241 [3500]
750	747 [45.6]	130	150	95 [25]	114 [30]	1780 [15750]	2090 [18500]	172 [2500]	207 [3000]	241 [3500]
930	929 [56.7]	100	120	95 [25]	114 [30]	1780 [15750]	2141 [18950]	138 [2000]	172 [2500]	207 [3000]
1K1	1047 [63.9]	90	110	95 [25]	114 [30]	1915 [16950]	2316 [20500]	138 [2000]	172 [2500]	207 [3000]
1K5	1495 [91.2]	60	70	95 [25]	114 [30]	2090 [18500]	2316 [20500]	103 [1500]	121 [1750]	138 [2000]
2K1	2093 [127.7]	40	50	95 [25]	114 [30]	2661 [23550]	3342 [29580]	103 [1500]	121 [1750]	138 [2000]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Running at intermittent ratings should not exceed 10% of every minute of operation.

DT (All Series)

For Heavy Duty Applications

DISPLACEMENT PERFORMANCE

		Pressure - bar [psi]							Max. Cont.	Max. Inter.		
300		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	241 [3500]			
300 cm ³ [18.3 in ³] / rev												
Flow - lpm [gpm]		Torque - Nm [lb-in], Speed rpm							Intermittent Ratings - 10% of Operation			
2 [0.5]		54 [476] 4	115 [1014] 3	237 [2100] 2						7		
4 [1]		47 [415] 11	108 [952] 9	255 [2256] 7	380 [3363] 5	486 [4304] 3				13		
8 [2]		49 [435] 24	119 [1057] 23	257 [2278] 21	410 [3628] 19	543 [4801] 15	671 [5942] 12	789 [6983] 9	899 [7959] 7	26		
15 [4]		49 [430] 50	120 [1064] 49	264 [2336] 46	409 [3616] 43	554 [4904] 37	701 [6202] 32	839 [7424] 28	971 [8595] 26	51		
23 [6]					116 [1025] 75	420 [3719] 65	567 [5019] 58	712 [6297] 54	854 [7554] 51	76		
30 [8]					105 [929] 100	251 [2222] 97	396 [3506] 93	542 [4793] 86	692 [6122] 78	831 [7353] 70	101	
38 [10]					99 [877] 126	237 [2099] 122	388 [3438] 115	549 [4857] 113	687 [6081] 107	833 [7369] 96	127	
45 [12]					88 [762] 151	237 [2094] 150	378 [3342] 140	527 [4666] 135	666 [5893] 129	823 [7281] 119	152	
53 [14]					77 [679] 176	211 [1864] 175	361 [3191] 172	506 [4478] 164	656 [5802] 156	805 [7121] 151	177	
61 [16]					60 [528] 201	208 [1845] 200	359 [3179] 189	495 [4378] 185	648 [5731] 178	791 [6999] 172	202	
68 [18]						191 [1694] 225	335 [2961] 222	497 [4402] 211	632 [5592] 206	776 [6871] 196	228	
76 [20]						168 [1489] 251	320 [2835] 247	461 [4083] 240	610 [5401] 233	764 [6762] 228	253	
83 [22]						147 [1298] 276	302 [2675] 272	444 [3926] 269	588 [5205] 258	742 [6570] 249	278	
91 [24]						123 [1086] 300	272 [2409] 298	414 [3666] 296	558 [4934] 290	708 [6264] 281	303	
95 [25]						108 [958] 315	257 [2278] 313	393 [3482] 308	549 [4857] 300	694 [6139] 289	316	
114 [30]							186 [1642] 376	333 [2945] 372	473 [4189] 369		379	

		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input checked="" type="checkbox"/> 0 - 39% <input type="checkbox"/>							Max. Cont.	Max. Inter.	
Rotor Width		Theoretical Torque - Nm [lb-in]									
25.4 [1.000]	mm [in]	82 [729]	165 [1457]	329 [2914]	494 [4371]	659 [5828]	823 [7285]	988 [8742]	1152 [10199]		

		Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]							Pressure - bar [psi]	Max. Cont.	Max. Inter.
375		Torque - Nm [lb-in], Speed rpm							Intermittent Ratings - 10% of Operation		
Flow - lpm [gpm]		65 [574] 4	144 [1272] 3	302 [2670] 2	449 [3970] 1					6	
2 [0.5]		66 [583] 9	152 [1345] 8	312 [2757] 7	475 [4208] 5	625 [5535] 4				11	
4 [1]		67 [596] 19	154 [1365] 18	329 [2907] 17	496 [4388] 14	644 [5695] 12	805 [7122] 10	963 [8524] 8	1050 [9288] 7	21	
8 [2]		71 [627] 40	158 [1400] 39	337 [2982] 37	513 [4536] 34	680 [6020] 30	858 [7596] 27	1013 [8962] 25	1099 [9723] 23	41	
15 [4]		64 [570] 60	151 [1334] 60	336 [2969] 58	520 [4598] 54	694 [6141] 49	871 [7704] 45	1048 [9275] 41	1115 [9867] 41	61	
23 [6]		53 [467] 81	151 [1337] 80	325 [2876] 78	512 [4532] 73	691 [6113] 69	873 [7724] 63	1051 [9304] 60	1126 [9964] 59	82	
30 [8]		131 [1161] 101	313 [2768] 99	502 [4439] 95	686 [6075] 89	884 [7824] 82	1049 [9281] 79	1131 [10011] 77		102	
38 [10]		112 [995] 121	308 [2725] 120	494 [4375] 116	685 [6059] 109	862 [7626] 103	1053 [9321] 98	1137 [10066] 97		122	
45 [12]		99 [878] 141	283 [2508] 140	469 [4149] 136	645 [5705] 131	844 [7467] 125	1013 [8965] 117	1116 [9877] 115		142	
53 [14]		75 [662] 162	262 [2319] 161	443 [3923] 160	631 [5587] 155	823 [7283] 148	1009 [8930] 143	1114 [9859] 136		163	
61 [16]		248 [2198] 181	427 [3779] 178	612 [5416] 175	804 [7119] 167	1005 [8895] 160	1091 [9653] 160	1183 [1066] 156		183	
68 [18]		218 [1925] 202	403 [3568] 200	583 [5161] 195	778 [6886] 189	966 [8549] 178	1071 [9474] 173			203	
76 [20]		189 [1676] 222	375 [3318] 221	561 [4967] 217	754 [6669] 211	942 [8335] 201	1036 [9171] 196			223	
83 [22]		155 [1374] 242	344 [3041] 240	535 [4732] 237	724 [6410] 229					244	
91 [24]		321 [2839] 252	519 [4596] 249	710 [6283] 241						254	
95 [25]		238 [2110] 303	432 [3820] 301	622 [5503] 296						304	

		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input checked="" type="checkbox"/> 0 - 39% <input type="checkbox"/>							Max. Cont.	Max. Inter.	
Rotor Width		Theoretical Torque - Nm [lb-in]									
31.8 [1.252]	mm [in]	103 [908]	205 [1815]	410 [3631]	615 [5446]	821 [7261]	1026 [9076]	1231 [10892]	1333 [11799]		

Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DISPLACEMENT PERFORMANCE

		Pressure - bar [psi]				Max. Cont.		Max. Inter.	
470		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	224 [3250]
465 cm ³ [28.3 in ³] / rev									
Flow - lpm [gpm]		Torque - Nm [lb-in], Speed rpm				Intermittent Ratings - 10% of Operation			
2 [0.5]		86 [762] 3	201 [1780] 2	401 [3553] 2					
4 [1]		92 [817] 7	195 [1728] 7	406 [3597] 6	610 [5395] 5	806 [7137] 4			
8 [2]		94 [835] 15	199 [1761] 15	418 [3702] 14	631 [5580] 13	832 [7365] 11	1042 [9226] 9	1239 [10961] 8	
15 [4]		92 [815] 32	202 [1784] 32	426 [3769] 60	646 [5717] 28	849 [7513] 24	1066 [9430] 23	1272 [11256] 21	1381 [12217] 19
23 [6]		82 [729] 48	203 [1799] 47	423 [3744] 46	647 [5725] 43	855 [7565] 39	1070 [9473] 36	1275 [11287] 34	1365 [12083] 32
30 [8]		67 [595] 65	185 [1641] 64	414 [3663] 63	642 [5683] 60	867 [7671] 54	1078 [9538] 47	1300 [11508] 46	1398 [12367] 44
38 [10]		52 [459] 81	170 [1503] 80	399 [3532] 79	630 [5573] 78	857 [7584] 69	1077 [9531] 63	1283 [11352] 61	1393 [12323] 58
45 [12]		153 [1354] 97	380 [3366] 96	613 [5422] 93	842 [7454] 88	1072 [9488] 77	1302 [11523] 74	1394 [12334] 68	
53 [14]		127 [1121] 114	359 [3173] 113	591 [5229] 110	823 [7282] 104	1057 [9350] 97	1270 [11242] 89	1392 [12318] 85	
61 [16]		100 [888] 160	335 [2964] 129	564 [4993] 127	798 [7061] 119	1030 [9118] 114	1254 [11101] 108	1369 [12118] 102	
68 [18]		67 [595] 146	304 [2689] 145	535 [4734] 143	765 [6772] 137	1003 [8875] 132	1229 [10877] 120	1348 [11926] 114	
76 [20]			274 [2428] 162	504 [4458] 160	733 [6485] 155	965 [8536] 148	1197 [10592] 139	1318 [11668] 136	
83 [22]			226 [2003] 178	458 [4050] 175	691 [6118] 172	928 [8215] 165	1150 [10181] 156	1266 [11200] 154	
91 [24]			176 [1554] 194	415 [3670] 192	669 [5917] 190	885 [7833] 183			
95 [25]				389 [3442] 203	632 [5589] 198	867 [7676] 190			
114 [30]				277 [2451] 243	514 [4549] 240	755 [6684] 235			

Rotor Width	Overall Efficiency - 70 - 100% <input type="checkbox"/>	40 - 69% <input type="checkbox"/>	0 - 39% <input type="checkbox"/>
Theoretical Torque - Nm [lb-in]			
39.4 [1.553]	127 [1127]	255 [2253]	509 [4506]

mm [in]	764 [6760]	1018 [9013]	1273 [1126]	1528 [13519]	1655 [14646]
Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]					
Pressure - bar [psi]					
17 [250]					

		Pressure - bar [psi]				Max. Cont.		Max. Inter.	
540		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]	
536 cm ³ [32.7 in ³] / rev									
Flow - lpm [gpm]		Torque - Nm [lb-in], Speed rpm				Intermittent Ratings - 10% of Operation			
2 [0.5]		103 [908] 2	215 [1607] 2	421 [3722] 1					
4 [1]		104 [917] 6	228 [2016] 5	454 [4015] 4	666 [5897] 3	874 [7730] 1			
8 [2]		108 [954] 13	231 [2043] 12	474 [4191] 11	704 [6231] 9	925 [8190] 5	1153 [10201] 4		
15 [4]		102 [906] 27	232 [2052] 26	503 [4448] 24	756 [6692] 21	994 [8799] 18	1221 [10806] 15	1461 [12930] 13	
23 [6]		98 [866] 42	230 [2038] 41	498 [4404] 39	766 [6774] 36	1023 [9049] 30	1268 [11225] 27	1494 [13219] 24	
30 [8]		84 [744] 56	213 [1883] 55	484 [4280] 53	754 [6669] 49	1032 [9130] 42	1273 [11262] 38	1524 [13486] 34	
38 [10]		63 [561] 70	195 [1727] 69	466 [4122] 68	737 [6519] 64	1006 [8903] 57	1285 [11374] 49	1532 [13556] 46	
45 [12]		42 [373] 84	179 [1586] 83	444 [3928] 82	717 [6349] 76	984 [8710] 72	1274 [11277] 65	1518 [13436] 57	
53 [14]		146 [1295] 97	421 [3722] 95	694 [6139] 93	964 [8529] 87	1253 [11091] 80	1512 [13381] 70		
61 [16]		116 [1025] 113	391 [3460] 111	663 [5865] 108	930 [8230] 103	1206 [10675] 97	1479 [13086] 84		
68 [18]		90 [798] 127	356 [3153] 125	629 [5563] 123	900 [7969] 116	1192 [10550] 107	1451 [12841] 100		
76 [20]		56 [498] 141	330 [2923] 139	595 [5265] 137	887 [7850] 133	1158 [10250] 123	1421 [12578] 114		
83 [22]			278 [2464] 155	549 [4859] 153	822 [7271] 148	1121 [9919] 136	1388 [12283] 133		
91 [24]			243 [2154] 169	508 [4494] 166	794 [7024] 164	1054 [9325] 156			
95 [25]			220 [1948] 176	486 [4299] 174	762 [6741] 169	1025 [9075] 163			
114 [30]			90 [800] 211	366 [3237] 210	638 [5649] 207	920 [8144] 203			

Rotor Width	Overall Efficiency - 70 - 100% <input type="checkbox"/>	40 - 69% <input type="checkbox"/>	0 - 39% <input type="checkbox"/>
Theoretical Torque - Nm [lb-in]			
45.5 [1.791]	147 [1302]	294 [2604]	588 [5207]

Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

Theoretical rpm	4
	8
	15
	29
	43
	57
	71
	85
	99
	114
	128
	142
	156
	170
	177
	212

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DT (All Series)

For Heavy Duty Applications

DISPLACEMENT PERFORMANCE

		Pressure - bar [psi]							Max. Cont.		Max. Inter.												
750		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]															
748 cm ³ [45.6 in ³] / rev																							
Flow - lpm [gpm]		Torque - Nm [lb-in], Speed rpm							Intermittent Ratings - 10% of Operation														
Max. Max. Inter. Cont.	2 [0.5]	144 [1276] 1	290 [2566] 1						Theoretical rpm	3													
	4 [1]	154 [1367] 4	323 [2863] 3	669 [5917] 2	931 [8242] 2					6													
	8 [2]	162 [1435] 9	341 [3015] 9	712 [6302] 7	1021 [9038] 6	1305 [11550] 3				11													
	15 [4]	158 [1400] 19	348 [3080] 19	723 [6399] 17	1082 [9578] 15	1402 [12410] 11				21													
	23 [6]	144 [1273] 30	331 [2927] 29	714 [6317] 27	1083 [9583] 24	1433 [12678] 20	1744 [15430] 16			31													
	30 [8]	126 [1116] 40	328 [2900] 39	697 [6167] 37	1072 [9486] 34	1451 [12843] 25	1769 [15658] 20			41													
	38 [10]	104 [922] 50	291 [2574] 50	675 [5976] 47	1055 [9334] 44	1445 [12785] 36	1786 [15805] 28	2076 [18373] 19		51													
	45 [12]	77 [682] 60	269 [2382] 59	655 [5792] 58	1032 [9136] 54	1431 [12668] 49	1786 [15801] 36	2094 [18528] 30		61													
	53 [14]	46 [410] 70	239 [2116] 69	627 [5545] 68	1003 [8880] 65	1407 [12451] 59	1767 [15634] 45	2099 [18578] 37		71													
	61 [16]		201 [1780] 81	584 [5164] 79	971 [8592] 76	1345 [11907] 70	1743 [15422] 57	2065 [18271] 44		82													
	68 [18]		161 [1421] 91	545 [4819] 90	928 [8209] 86	1306 [11556] 80	1709 [15120] 69			92													
	76 [20]		120 [1058] 101	497 [4395] 100	863 [7635] 97	1260 [11154] 90				102													
	83 [22]			444 [3926] 110	831 [7351] 108	1213 [10737] 101				112													
	91 [24]			389 [3447] 121	785 [6947] 117	1196 [10581] 111				122													
	95 [25]			368 [3255] 126	757 [6697] 124	1144 [10126] 120				127													
	114 [30]			205 [1813] 151	613 [5428] 149	979 [8665] 146				152													
Rotor Width		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>							Intermittent Ratings - 10% of Operation														
63.5 [2.501] mm [in]		Theoretical Torque - Nm [lb-in]																					
205 [1815] 410 [3631] 821 [7261] 1231 [10892] 1641 [14522] 2051 [18153] 2462 [21783]																							
Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]																							
		Pressure - bar [psi]							Max. Cont.		Max. Inter.												
930		17 [250]	35 [500]	52 [750]	69 [1000]	86 [1250]	104 [1500]	121 [1750]	138 [2000]	155 [2250]	173 [2500]												
929 cm ³ [56.7 in ³] / rev																							
Flow - lpm [gpm]		Torque - Nm [lb-in], Speed rpm							Intermittent Ratings - 10% of Operation														
Max. Max. Inter. Cont.	2 [0.5]	180 [1590] 1	387 [3423] 1	607 [5368] 1	801 [7089] 1				Theoretical rpm	3													
	4 [1]	196 [1734] 4	418 [3696] 3	653 [5780] 3	864 [7649] 3	1067 [9447] 3	1294 [11451] 3	5															
	8 [2]	205 [1816] 8	442 [3907] 7	680 [6015] 7	877 [7764] 7	1117 [9886] 7	1300 [11501] 6	9															
	15 [4]	198 [1753] 16	432 [3825] 15	664 [5878] 15	906 [8021] 15	1121 [9924] 14	1338 [11840] 13	17															
	23 [6]	185 [1633] 24	420 [3719] 24	651 [5765] 24	908 [8034] 24	1123 [9935] 23	1355 [11991] 22	25															
	30 [8]	162 [1438] 32	404 [3576] 31	636 [5624] 30	893 [7900] 30	1107 [9800] 29	1340 [11854] 28	33															
	38 [10]	125 [1109] 40	368 [3253] 39	626 [5536] 38	845 [7476] 38	1087 [9620] 36	1314 [11625] 34	41															
	45 [12]	91 [807] 48	341 [3018] 47	578 [5111] 46	815 [7213] 45	1072 [9487] 44	1314 [11630] 42	49															
	53 [14]	35 [310] 57	290 [2565] 56	533 [4715] 55	765 [6772] 54	1024 [9059] 52	1240 [10974] 50	58															
	61 [16]		239 [2118] 64	484 [4281] 63	726 [6429] 62	959 [8488] 61	1210 [10708] 57	66															
	68 [18]		205 [1811] 72	440 [3891] 72	701 [6202] 70	920 [8143] 69	1177 [10418] 67	74															
	76 [20]		150 [1325] 81	400 [3616] 80	632 [5590] 79	801 [7091] 78	1100 [9733] 76	82															
	83 [22]		99 [875] 89	336 [2977] 88	581 [5139] 87	837 [7403] 86	1056 [9342] 83	90															
	91 [24]			282 [2497] 97	501 [4438] 96	766 [6778] 94	1021 [9038] 93	98															
	95 [25]			241 [2137] 101	496 [4389] 100	722 [6390] 100	974 [8621] 97	102															
	114 [30]			66 [582] 122	300 [2652] 121	532 [4711] 120	781 [6914] 118	123															
Rotor Width		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>							Intermittent Ratings - 10% of Operation														
78.9 [3.106] mm [in]		Theoretical Torque - Nm [lb-in]																					
255 [2257] 510 [4514] 765 [6771] 1020 [9029] 1275 [11286] 1530 [13543] 1785 [15800] 2040 [18057] 2296 [20314] 2551 [22572]																							
Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]																							

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DISPLACEMENT PERFORMANCE

		Pressure - bar [psi]							Max. Cont.		Max. Inter.	
1K1		17 [250]	35 [500]	52 [750]	69 [1000]	86 [1250]	104 [1500]	121 [1750]	138 [2000]	155 [2250]	173 [2500]	
1047 cm ³ [63.9 in ³] / rev												
		Torque - Nm [lb-in], Speed rpm							Intermittent Ratings - 10% of Operation			
Flow - lpm [gpm]		217 [1918]	455 [4026]	671 [5940]	890 [7879]	0.9	0.6					
Max. Max. Inter. Cont.	1	1	2	2	2	2	2					
	4 [1]	206 [1821]	498 [4410]	706 [6251]	935 [8273]	1189 [10518]	1189 [10518]					
	8 [2]	224 [1985]	498 [4407]	754 [6672]	983 [8700]	1222 [10810]	1428 [12635]	1428 [12635]				
	15 [4]	224 [1980]	472 [4180]	754 [6669]	1011 [8946]	1262 [11169]	1486 [13147]	1697 [15014]	1697 [15014]			
	23 [6]	170 [1500]	487 [4314]	739 [6538]	1020 [9023]	1238 [10956]	1501 [13286]	1695 [14998]	1914 [16936]	1914 [16936]		
	30 [8]	164 [1451]	431 [3814]	709 [6270]	970 [8580]	1241 [10986]	1481 [13106]	1727 [15280]	1942 [17185]	2144 [18971]		
	38 [10]	129 [1143]	401 [3546]	675 [5975]	944 [8356]	1208 [10688]	1455 [12879]	1714 [15168]	1919 [16982]	2145 [18983]		
	45 [12]	98 [871]	359 [3176]	624 [5526]	894 [7915]	1148 [10163]	1420 [12569]	1693 [14981]	1893 [16756]	2133 [18879]	2311 [20456]	
	53 [14]	44 [390]	312 [2761]	580 [5129]	851 [7535]	1122 [9933]	1383 [12237]	1612 [14263]	1856 [16424]	2098 [18569]	2327 [20596]	
	61 [16]	50	50	49	49	47	44	40	33	29	25	
	68 [18]	251 [2220]	516 [4569]	776 [6871]	1062 [9402]	1320 [11678]	1587 [14045]	1837 [16261]	2082 [18426]	2291 [20275]		
	76 [20]	190 [1678]	458 [4053]	706 [6252]	1002 [8869]	1272 [11252]	1552 [13738]	1794 [15877]	2051 [18147]	2275 [20130]		
	83 [22]	65	65	64	62	60	59	52	41	33		
	91 [24]	117 [1033]	390 [3453]	652 [5774]	930 [8227]	1187 [10502]	1596 [12874]	1723 [15246]	2001 [17705]	2228 [19716]		
	95 [25]	50 [444]	310 [2741]	569 [5034]	847 [7493]	1113 [9846]	1380 [12214]	1650 [14599]	1927 [17055]	2138 [18924]		
	114 [30]	79	79	78	77	76	74	67	62	51		
		210 [1862]	491 [4346]	755 [6677]	1018 [9007]	1288 [11398]	1557 [13777]	1827 [16164]	2101 [18591]			
		185 [1635]	463 [4096]	710 [6281]	963 [8519]	1232 [10901]	1497 [13247]	1790 [15844]	2028 [17950]			
		202 [1789]	108	477 [4217]	730 [6460]	1013 [8962]	1237 [10947]	104	76	71		

Rotor Width	Overall Efficiency - 70 - 100%	40 - 69%	0 - 39%
Theoretical Torque - Nm [lb-in]			
88.9 [3.502]	287 [2544]	575 [5088]	862 [7631]

mm [in] Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

Pressure - bar [psi]	Max. Cont.	Max. Inter.
17 [250]	35 [500]	52 [750]

1495 cm³ [91.2 in³] / rev

		Pressure - bar [psi]							Max. Cont.		Max. Inter.	
1K5		17 [250]	35 [500]	52 [750]	69 [1000]	86 [1250]	104 [1500]	121 [1750]				
1495 cm ³ [91.2 in ³] / rev												
		Torque - Nm [lb-in], Speed rpm							Intermittent Ratings - 10% of Operation			
Flow - lpm [gpm]		305 [2703]	648 [5736]	0.9								
Max. Max. Inter. Cont.	2 [0.5]	336 [2978]	693 [6128]	1011 [8942]	1							
	4 [1]	351 [3106]	729 [6454]	1085 [9597]	1364 [12072]	3	3					
	8 [2]	331 [2925]	712 [6304]	1116 [9879]	1491 [13191]	1771 [15668]	7	7				
	15 [4]	297 [2629]	681 [3023]	1088 [9632]	1464 [12952]	1770 [15662]	12	10				
	23 [6]	247 [2183]	640 [5662]	1038 [9188]	1430 [12655]	1793 [15864]	2123 [18786]	15	9			
	30 [8]	197 [1740]	583 [5159]	1001 [8860]	1377 [12189]	1749 [15479]	2090 [18498]	23	14			
	38 [10]	131 [1157]	531 [4695]	940 [8315]	1330 [11770]	1702 [15066]	2041 [18059]	24	19	14		
	45 [12]	67 [594]	484 [4282]	869 [7689]	1267 [11217]	1642 [14532]	1990 [17612]	30	24	15		
	53 [14]	391 [3457]	769 [6805]	1172 [10374]	1567 [13866]	1914 [16941]	2258 [19986]	39	32	21		
	61 [16]	294 [2602]	686 [6072]	1076 [9523]	1489 [13177]	1846 [16334]	2188 [19366]	44	38	27		
	68 [18]	182 [1607]	614 [5435]	988 [8746]	1392 [12320]	1743 [15429]	2301 [18553]	49	44	37		
	76 [20]	87 [770]	487 [4310]	872 [7720]	1283 [11356]	1632 [14442]	2021 [17883]	54	48	46		
	83 [22]	456 [4032]	749 [6632]	1146 [10143]	1533 [13570]	1872 [16568]	60	58	50			
	91 [24]	293 [2589]	704 [6232]	1052 [9313]	1465 [12961]	1843 [16306]	62	59	53			
	95 [25]	246 [2174]	645 [5711]	1047 [9265]	1407 [1265]	173	73					
		Overall Efficiency - 70 - 100%							Theoretical Torque - Nm [lb-in]			
Rotor Width		410 [3631]	821 [7261]	1231 [10892]	1641 [14522]	2051 [18153]	2462 [21783]	2872 [25414]				
mm [in] Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]												

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DT (All Series)

For Heavy Duty Applications

DISPLACEMENT PERFORMANCE

		Pressure - bar [psi]							Max. Cont.	Max. Inter.
2K1		17 [250]	35 [500]	52 [750]	69 [1000]	86 [1250]	104 [1500]	121 [1750]		
2094 cm ³ [127.7 in ³] / rev		Torque - Nm [lb-in], Speed rpm							Intermittent Ratings - 10% of Operation	
Flow - lpm [gpm]	2 [0.5]	438 [3878] 0.8	892 [7894] 0.8						Theoretical rpm	1
	4 [1]	440 [3891] 1	922 [8162] 1	1398 [12375] 1						2
	8 [2]	460 [4073] 3	956 [8458] 3	1460 [12923] 3						4
	15 [4]	443 [3920] 7	963 [8525] 7	1491 [13192] 6	1980 [17520] 6					8
	23 [6]	402 [3560] 10	924 [8179] 10	1470 [13012] 10	1963 [17370] 9					11
	30 [8]	337 [2985] 14	884 [7824] 14	1425 [12613] 14	1920 [16995] 13	2390 [21152] 9	2668 [23613] 8			15
	38 [10]	275 [2431] 17	814 [7205] 17	1350 [11944] 16	1869 [16538] 16	2343 [20733] 13	2663 [23564] 9			19
	45 [12]	173 [1535] 21	723 [6398] 21	1262 [11171] 21	1795 [15886] 20	2286 [20232] 17	2665 [23588] 12			22
	53 [14]	66 [587] 25	619 [5479] 24	1155 [10221] 24	1702 [15063] 23	2206 [19519] 21	2637 [23333] 13			26
	61 [16]		496 [4391] 28	1018 [9009] 28	1587 [14046] 27	2107 [18645] 26	2574 [22777] 20			29
	68 [18]		368 [3257] 32	910 [8052] 32	1466 [12973] 31	1980 [17527] 30	2471 [21866] 26			33
	76 [20]		225 [1991] 36	755 [6686] 36	1304 [11537] 36	1859 [16449] 35	2359 [20878] 30			37
	83 [22]		71 [628] 39	622 [5507] 39	1171 [10367] 39	1682 [14885] 38	2212 [19575] 36			40
	91 [24]			429 [3794] 43	984 [8704] 43	1544 [13665] 42	2067 [18291] 40			44
	95 [25]			354 [3129] 45	891 [7883] 45	1428 [12636] 45	1971 [17445] 43			46
	114 [30]				430 [3803] 54	959 [8485] 54	1492 [13207] 53			55
Rotor Width		Overall Efficiency - 70 - 100% <input type="checkbox"/> 40 - 69% <input type="checkbox"/> 0 - 39% <input type="checkbox"/>								
mm [in]		Theoretical Torque - Nm [lb-in]								
177.9 [7.003]		574 [5084] 1149 [10167] 1723 [15251] 2298 [20334] 2872 [25418] 3447 [30502] 4021 [35585]								



Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

PORTING



END PORTED - OFFSET

STANDARD

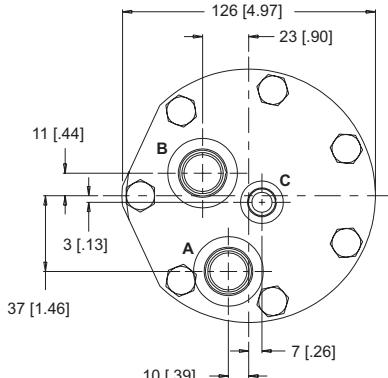

1 Main Ports **A, B:** 7/8-14 UNF
Drain Port **C:** 7/16-20 UNF



OPTIONAL

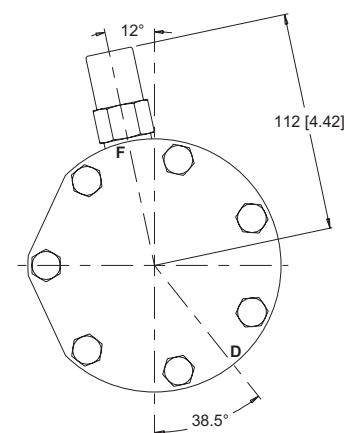

D: Internal Drain E: 10 Series/2-Way Valve Cavity 7/8-14 UNF F: Valve Cartridge Installed


SIDE PORTED - RADIAL

STANDARD

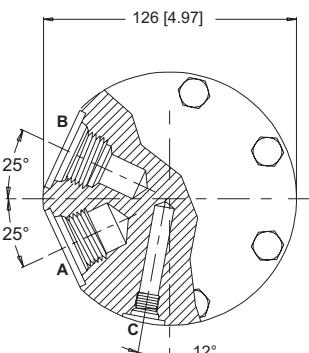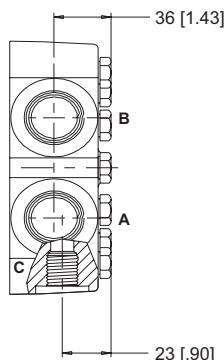


2 Main Ports **A, B:** G 3/4
Drain Port **C:** G 1/4

OPTIONAL



5 Main Ports **A, B:** 1 1/16-12 UN
Drain Port **C:** 7/16-20 UNF

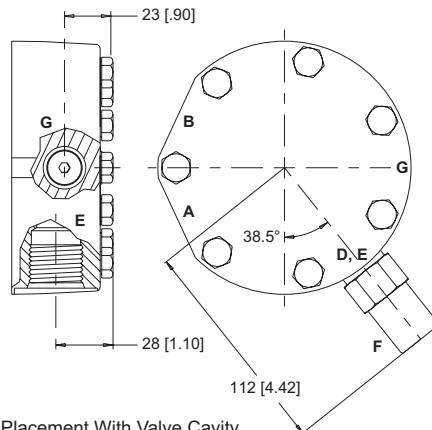

D: Internal Drain E: 10 Series/2-Way Valve Cavity 7/8-14 UNF F: Valve Cartridge Installed G: Internal Drain Placement With Valve Cavity

DT (700 Series)


Heavy Duty Hydraulic Motor

PORTING


SIDE PORTED - MANIFOLD ALIGNED

3 Main Ports **A, B:** 11/16" Drilled
Drain Port **C:** 7/16-20 UNF

STANDARD

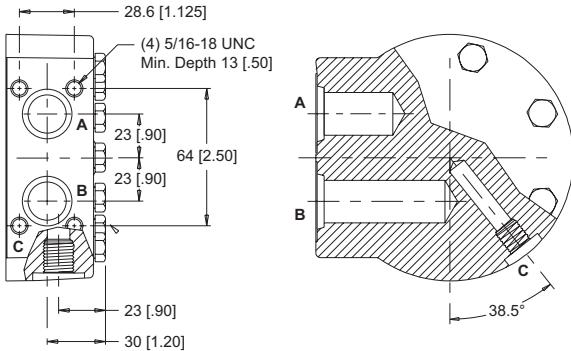

OPTIONAL

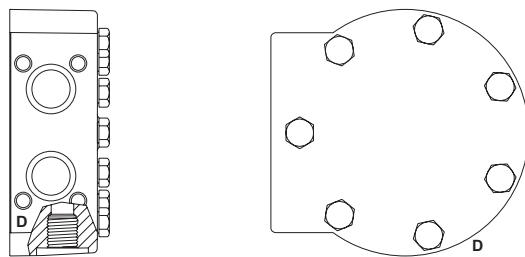

D: Internal Drain


SIDE PORTED - ALIGNED

6 Main Ports **A, B:** 1 1/16-12 UN
Drain Port **C:** 7/16-20 UNF


OPTIONAL

7 Main Ports **A, B:** G 3/4
Drain Port **C:** G 1/4

STANDARD

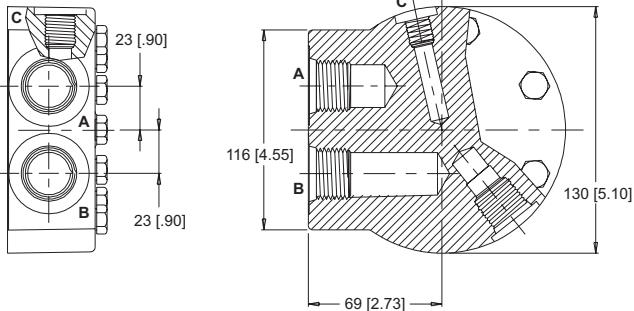

OPTIONAL

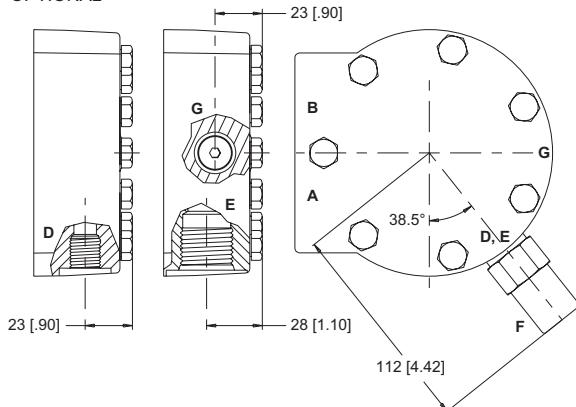


D: Internal Drain **E:** 10 Series/2-Way Valve Cavity 7/8-14 UNF **F:** Valve Cartridge Installed **G:** Internal Drain Placement With Valve Cavity

HOUSINGS

4-HOLE, SAE C MOUNT

C2 End Ports C8 Side Ports E2 End Ports E8 Side Ports

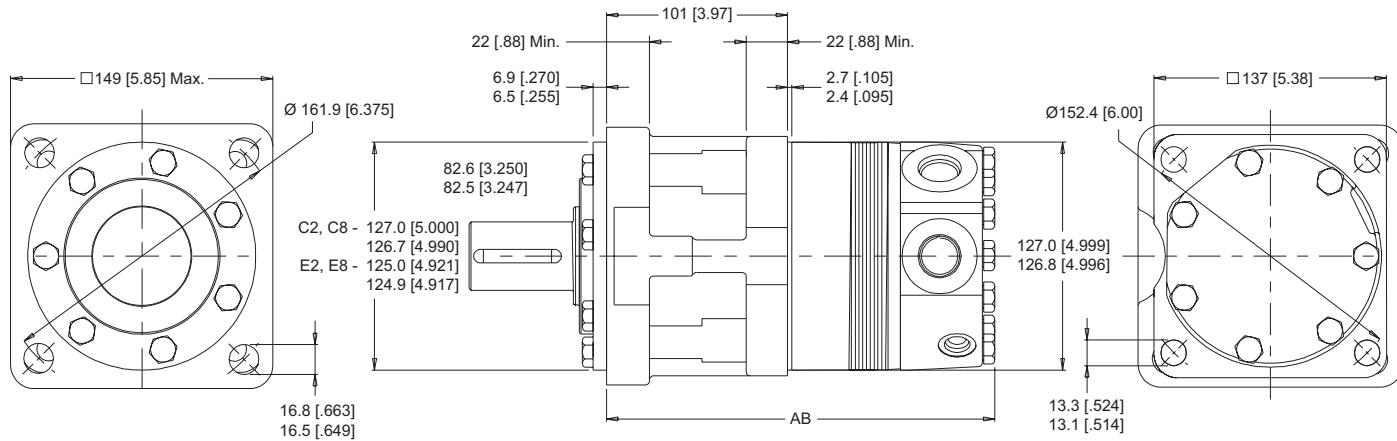


► Porting options listed on pages 41-42.

TECHNICAL INFORMATION

ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve represents allowable bearing loads based on ISO 281 bearing capacity for an L_{10} life of 2,000 hours at 100 rpm. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor table on page 7.

SAE C MOUNTS

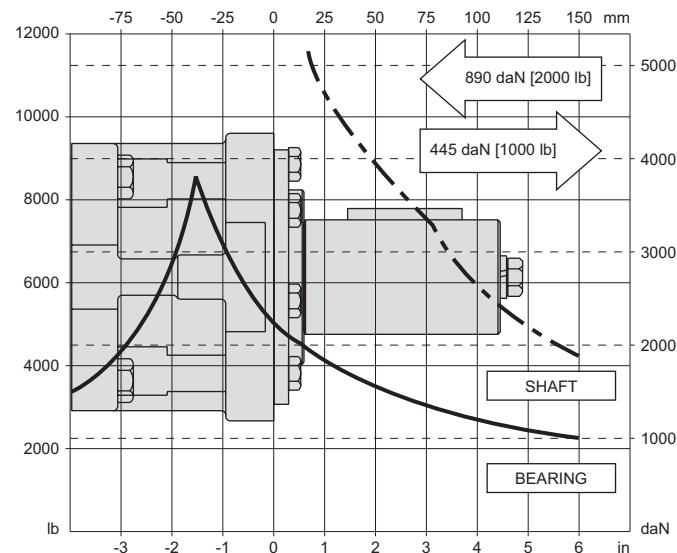

LENGTH & WEIGHT CHART

Dimension AB is the overall motor length from the rear of the motor to the mounting surface.

AB	Endcovers on pg. 41	Endcovers on pg. 42	Weight
#	mm [in]	mm [in]	kg [lb]
300	206 [8.14]	209 [8.25]	20.2 [44.6]
375	213 [8.39]	216 [8.50]	20.8 [45.8]
470	220 [8.69]	223 [8.80]	21.4 [47.1]
540	227 [8.93]	230 [9.04]	21.9 [48.2]
750	245 [9.64]	248 [9.75]	23.3 [51.3]
930	260 [10.24]	263 [10.35]	24.4 [53.8]
1K1	270 [10.64]	273 [10.75]	25.3 [55.7]
1K5	308 [12.14]	311 [12.25]	28.3 [62.5]
2K1	359 [14.14]	362 [14.25]	32.3 [71.3]


► All DT series motor weights can vary ± 1.4 kg [3 lb] depending on model configurations such as housing, shaft, endcover, options etc.

DT (700 Series)

Heavy Duty Hydraulic Motor


SHAFTS

09 14 Tooth Spline Extended

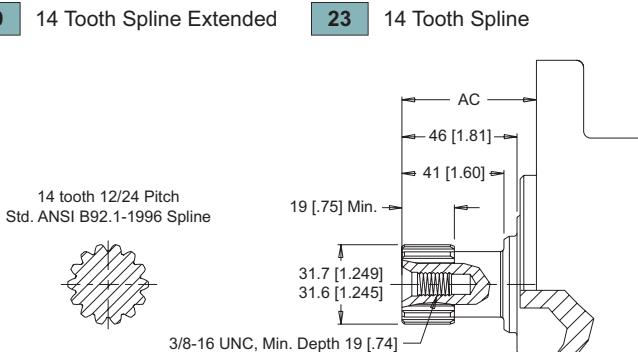


Max. Torque: 2070 Nm [18400 lb-in]

23 14 Tooth Spline

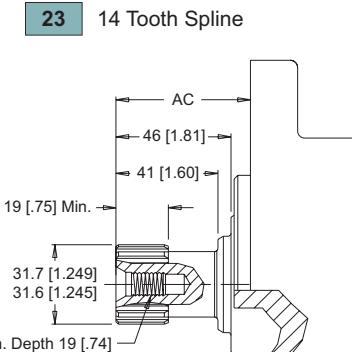


36 40mm Straight




Max. Torque: 2700 Nm [24000 lb-in]

54 40mm Straight Extended

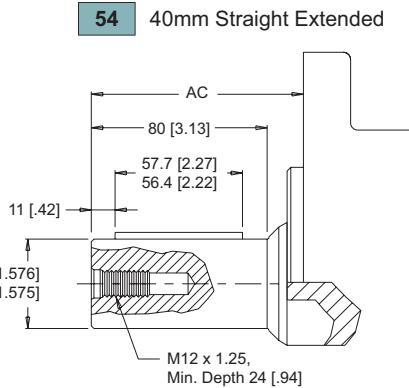


30 1-1/2" Straight

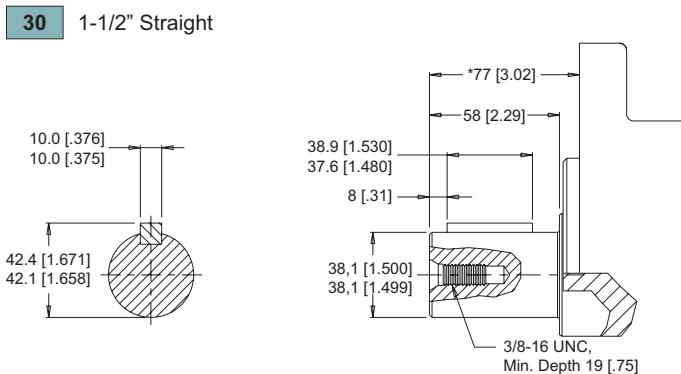


Max. Torque: 2230 Nm [19800 lb-in]

40 2-1/4" Straight

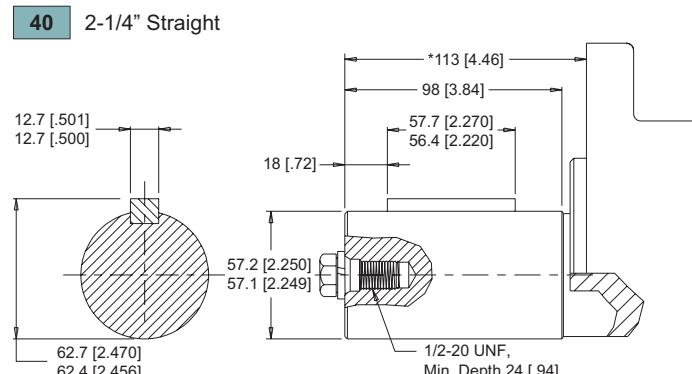


Max. Torque: 2700 Nm [24000 lb-in]

31 1-1/2" Tapered

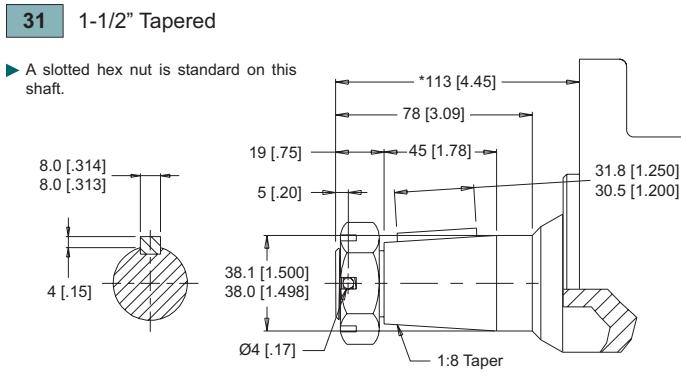


Max. Torque: 2250 Nm [19900 lb-in]

41 50mm Straight

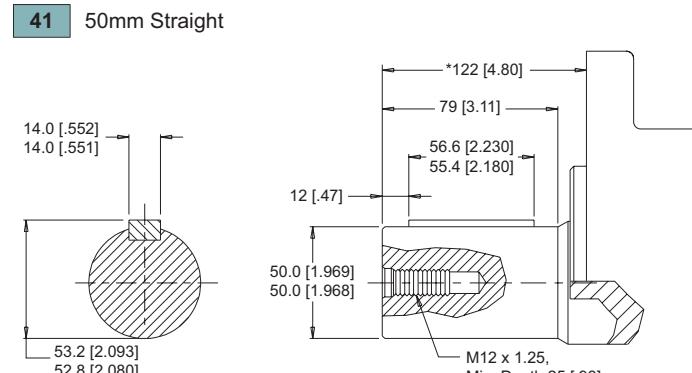

Max. Torque: 2700 Nm [24000 lb-in]

33 17 Tooth Spline

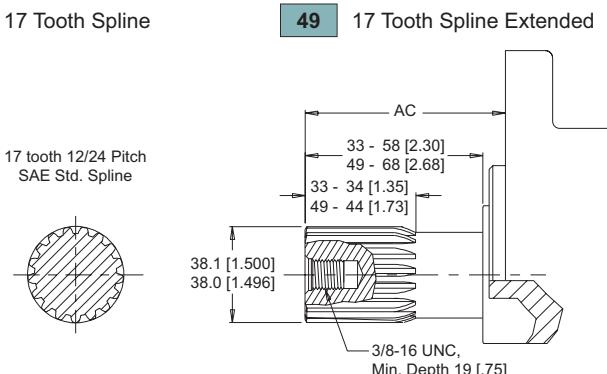


Max. Torque: 2250 Nm [19900 lb-in]

49 17 Tooth Spline Extended

42 16 Tooth Spline

16 tooth 8/16 Pitch
Std. ANSI B92.1-1996 Spline -
Deviates From Standard

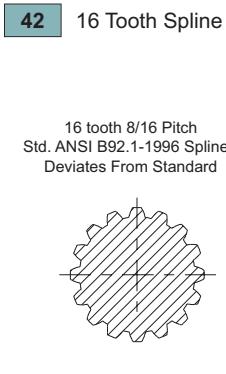


Max. Torque: 2700 Nm [24000 lb-in]

48 16 Tooth Spline Extended


► Dimension AC is charted on page 45.

SHAFTS

45 60mm Tapered

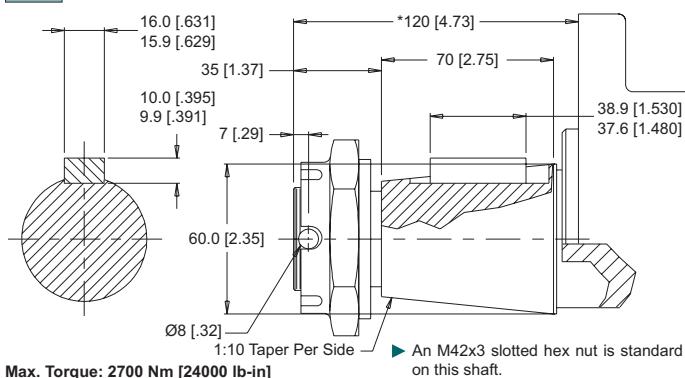

47 2-1/4" Straight

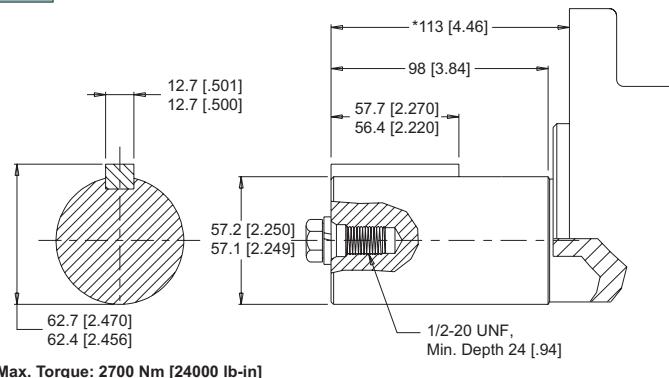

MOUNTING / SHAFT LENGTH CHART

Dimension AC is the overall distance from the motor mounting surface to the end of the shaft and is referenced on detailed shaft drawings on page 44.

► Shaft lengths vary ± 0.8 mm [.030 in.]

AC	Length	AC	Length
#	mm [in]	#	mm [in]
09	86 [3.38]	42	91 [3.57]
23	56 [2.19]	48	121 [4.77]
33	68 [2.69]	49	99 [3.89]
36	113 [4.45]	54	121 [4.78]

DT (700 Series)


Heavy Duty Hydraulic Motor

ORDERING INFORMATION



1. CHOOSE SERIES DESIGNATION

700 Standard Motor

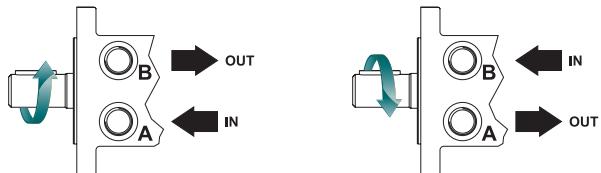

► The 700 series is bi-directional.

2. SELECT A DISPLACEMENT OPTION

300	300 cm ³ /rev [18.3 in ³ /rev]	930	929 cm ³ /rev [56.7 in ³ /rev]
375	374 cm ³ /rev [22.8 in ³ /rev]	1K1	1047 cm ³ /rev [63.9 in ³ /rev]
470	464 cm ³ /rev [28.3 in ³ /rev]	1K5	1495 cm ³ /rev [91.2 in ³ /rev]
540	536 cm ³ /rev [32.7 in ³ /rev]	2K1	2093 cm ³ /rev [127.7 in ³ /rev]
750	747 cm ³ /rev [45.6 in ³ /rev]		

3a. SELECT MOUNT TYPE

▼ END MOUNTS	
C2	SAE C Mount (5" Pilot)
E2	SAE C Mount (125mm Pilot)
▼ SIDE MOUNTS	
C8	SAE C Mount (5" Pilot)
E8	SAE C Mount (125mm Pilot)

3b. SELECT PORT SIZE

▼ END PORT OPTIONS	
1	7/8-14 UNF Offset
▼ SIDE PORT OPTIONS	
2	G 3/4, Radial
3	11/16" Hole, Aligned Manifold
5	1 1/16-12 UN, Radial
6	1 1/16-12 UN, Aligned
7	G 3/4, Radial

4. SELECT A SHAFT OPTION

09	14 Tooth Spline Extended	41	50mm Straight
23	14 Tooth Spline	42	16 Tooth Spline
30	1-1/2" Straight	45	60mm Tapered
31	1-1/2" Tapered	47	2-1/4" Straight
33	17 Tooth Spline	48	16 Tooth Spline Extended
36	40mm Straight	49	17 Tooth Spline Extended
40	2-1/4" Straight	54	40mm Straight Extended

► The #47 and extended shafts are designed for use with one of the speed sensor options listed in STEP 7.



5. SELECT A PAINT OPTION

A	Black
B	Black, Unpainted Mounting Surface
Z	No Paint

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

A	None	F	121 bar [1750 psi] Relief
B	Valve Cavity Only	G	138 bar [2000 psi] Relief
C	69 bar [1000 psi] Relief	J	173 bar [2500 psi] Relief
D	86 bar [1250 psi] Relief	L	207 bar [3000 psi] Relief
E	104 bar [1500 psi] Relief		

► Valve cavity is not available on port option 3.

7. SELECT AN ADD-ON OPTION

A	Standard
B	Lock Nut
C	Solid Hex Nut
W	Speed Sensor, Dual, 4-Pin Male Weatherpack Connector
X	Speed Sensor, Dual, 4-Pin M12 Male Connector
Y	Speed Sensor, Single, 3-Pin Male Weatherpack Connector
Z	Speed Sensor, Single, 4-Pin M12 Male Connector


8. SELECT A MISCELLANEOUS OPTION

AA	None
AB	Internal Drain
AC	Freeturning Rotor
AD	Internal Drain & Freeturning Rotor

HOUSINGS

4-HOLE, WHEEL HUB MOUNT

W2 End Ports **W8** Side Ports

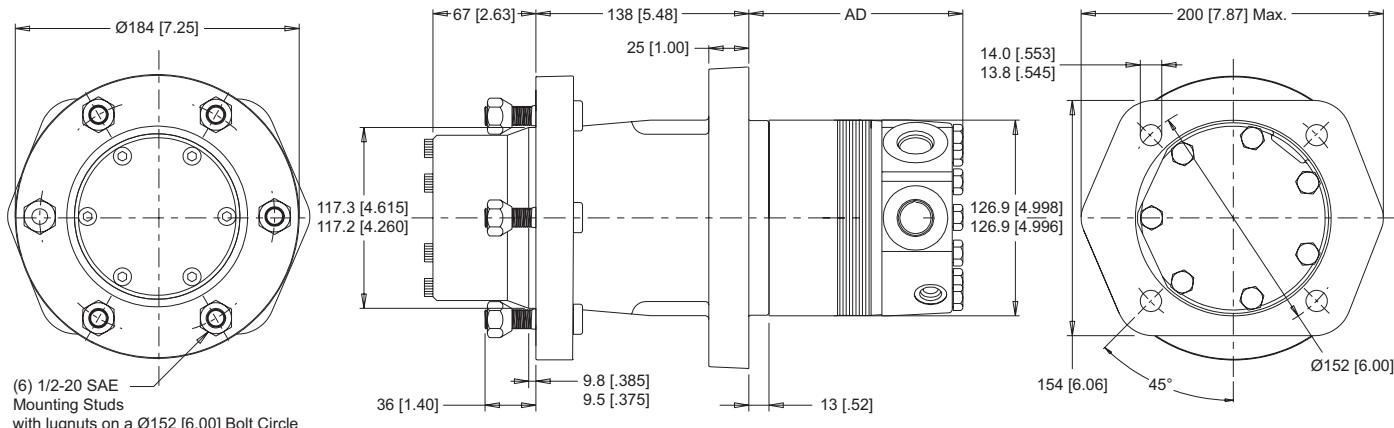


► Porting options listed on pages 41-42.

TECHNICAL INFORMATION

ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve represents allowable bearing loads based on ISO 281 bearing capacity for an L_{10} life of 2,000 hours at 100 rpm. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor table on page 7.

WHEEL HUB MOUNTS

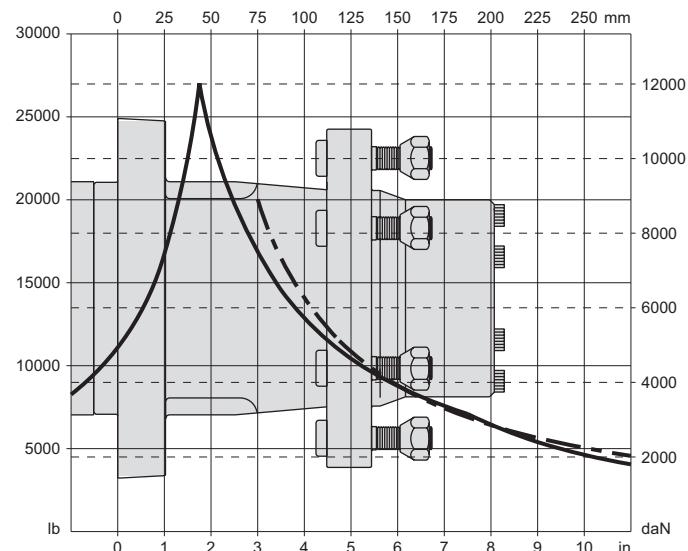

LENGTH & WEIGHT CHART

Dimension AD is the overall motor length from the rear of the motor to the mounting surface.


AD	Endcovers on pg. 41	Endcovers on pg. 42	Weight
#	mm [in]	mm [in]	kg [lb]
300	117 [4.63]	120 [4.74]	28.4 [62.6]
375	124 [4.88]	127 [4.99]	28.9 [63.8]
470	131 [5.18]	134 [5.29]	29.5 [65.1]
540	137 [5.42]	140 [5.53]	30.0 [66.2]
750	155 [6.13]	158 [6.24]	31.4 [69.2]
930	171 [6.73]	174 [6.84]	32.6 [71.8]
1K1	181 [7.13]	184 [7.24]	33.4 [73.7]
1K5	219 [8.63]	222 [8.74]	36.5 [80.5]
2K1	270 [10.63]	273 [10.74]	40.5 [89.3]

► All DT series motor weights can vary ± 1.4 kg [3 lb] depending on model configurations such as housing, shaft, endcover, options etc.

DT (740 Series)

Heavy Duty Hydraulic Motor

ORDERING INFORMATION

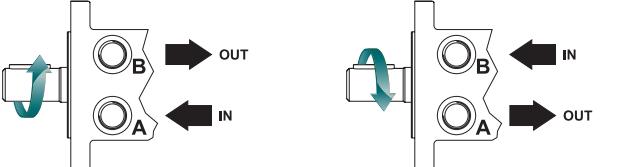1	2	3a	3b	4	5	6	7	8	
1. CHOOSE SERIES DESIGNATION				4. SELECT A SHAFT OPTION					
740 Hydraulic Motor With Wheel Hub				61 6-Bolt Wheel Flange					
				5. SELECT A PAINT OPTION					
► The 740 series is bi-directional. Reversing the inlet hose will reverse shaft rotation.				A Black Z No Paint					
2. SELECT A DISPLACEMENT OPTION				6. SELECT A VALVE CAVITY / CARTRIDGE OPTION					
300	300 cm ³ /rev [18.3 in ³ /rev]	930	929 cm ³ /rev [56.7 in ³ /rev]	A	None	F	121 bar [1750 psi] Relief		
375	374 cm ³ /rev [22.8 in ³ /rev]	1K1	1047 cm ³ /rev [63.9 in ³ /rev]	B	Valve Cavity Only	G	138 bar [2000 psi] Relief		
470	464 cm ³ /rev [28.3 in ³ /rev]	1K5	1495 cm ³ /rev [91.2 in ³ /rev]	C	69 bar [1000 psi] Relief	J	173 bar [2500 psi] Relief		
540	536 cm ³ /rev [32.7 in ³ /rev]	2K1	2093 cm ³ /rev [127.7 in ³ /rev]	D	86 bar [1250 psi] Relief	L	207 bar [3000 psi] Relief		
750	747 cm ³ /rev [45.6 in ³ /rev]			E	104 bar [1500 psi] Relief				
3a. SELECT MOUNT TYPE				7. SELECT AN ADD-ON OPTION					
▼ END MOUNTS				A Standard					
W2	Wheel Hub Mount	▼ END PORT OPTIONS				8. SELECT A MISCELLANEOUS OPTION			
▼ SIDE MOUNTS				1	7/8-14 UNF Offset	AA	None		
W8	Wheel Hub Mount	▼ SIDE PORT OPTIONS				AC	Freeturning Rotor		
				2	G 3/4, Radial				
				5	1 1/16-12 UN, Radial				

OVERVIEW


The D9 motor is capable of producing torque values comparable to competitive motors, but with an industry leading breadth of displacements and shaft and porting options. In addition, the product incorporates dual tapered roller bearings, which improve load carrying capabilities. The motor is designed for use with a case-drain, which reduces pressure on the shaft seal and maintains lubrication to internal drive components, maximizing motor life. The series is available with industry standard mounting flanges found throughout the global market place.

FEATURES / BENEFITS

- Industry Standard Mounting Flanges that satisfy the global market place.
- Dual Tapered Roller Bearings improve load carrying capability.
- Nine Displacement Options provide industry leading design flexibility.
- Roller Stator® Design incorporates 8 lobe rotor and 9 pocket stator technology.

SERIES DESCRIPTIONS

**800 - Hydraulic Motor
Standard**

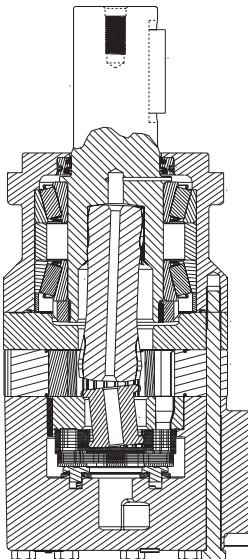

TYPICAL APPLICATIONS

Construction equipment, agricultural equipment, mining equipment, forestry equipment, associated attachments and more

SPECIFICATIONS



CODE	Displacement cm ³ [in ³ /rev]	Max. Speed rpm		Max. Flow lpm [gpm]		Max. Torque Nm [lb-in]		Max. Pressure bar [psi]		
		cont.	inter.	cont.	inter.	cont.	inter.	cont.	inter.	peak
260	256 [15.6]	520	700	136 [36]	182 [48]	763 [6750]	891 [7885]	207 [3000]	241 [3500]	259 [3750]
300	294 [17.9]	530	688	159 [42]	204 [54]	870 [7700]	1017 [9000]	207 [3000]	241 [3500]	259 [3750]
375	367 [22.4]	550	613	204 [54]	227 [60]	1099 [9725]	1284 [11365]	207 [3000]	241 [3500]	259 [3750]
450	455 [27.8]	445	496	204 [54]	227 [60]	1349 [11934]	1571 [13907]	207 [3000]	241 [3500]	259 [3750]
525	525 [32.1]	385	430	204 [54]	227 [60]	1569 [13888]	1824 [16143]	207 [3000]	241 [3500]	259 [3750]
625	623 [38.1]	325	361	204 [54]	227 [60]	1883 [16660]	2183 [19317]	207 [3000]	241 [3500]	259 [3750]
735	734 [44.8]	276	308	204 [54]	227 [60]	1815 [16063]	2165 [19156]	172 [2500]	207 [3000]	241 [3500]
910	911 [55.6]	223	250	204 [54]	227 [60]	2290 [20265]	2713 [24008]	172 [2500]	207 [3000]	241 [3500]
1K0	1027 [62.7]	197	220	204 [54]	227 [60]	2055 [18186]	2535 [22434]	138 [2000]	172 [2500]	207 [3000]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Running at intermittent ratings should not exceed 10% of every minute of operation.

D9 (All Series)

For Heavy Duty Applications

DISPLACEMENT PERFORMANCE

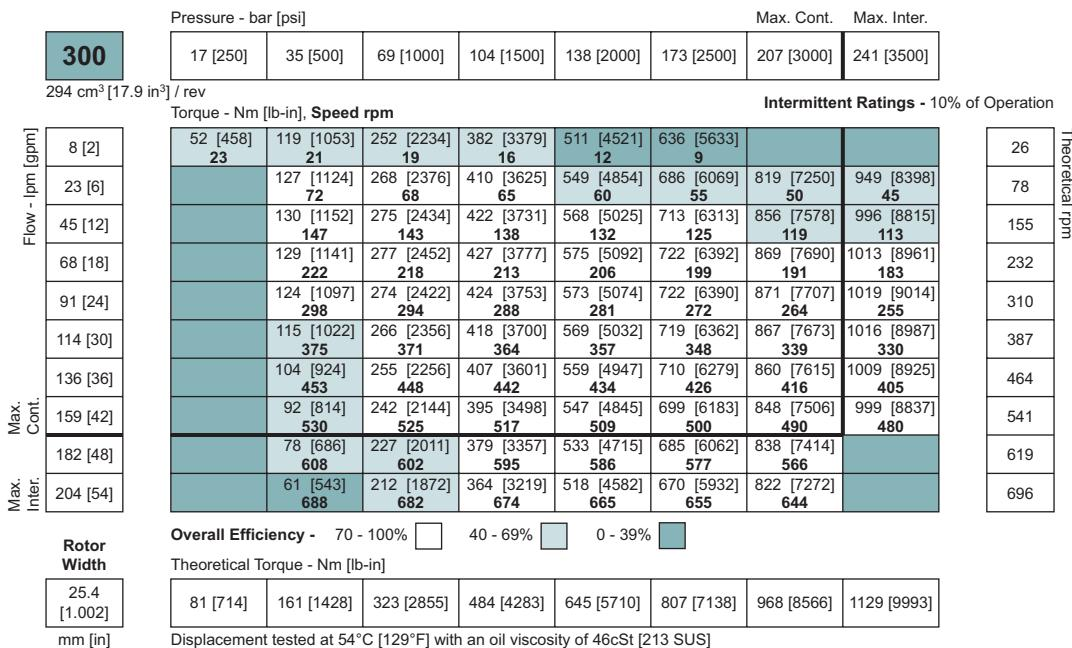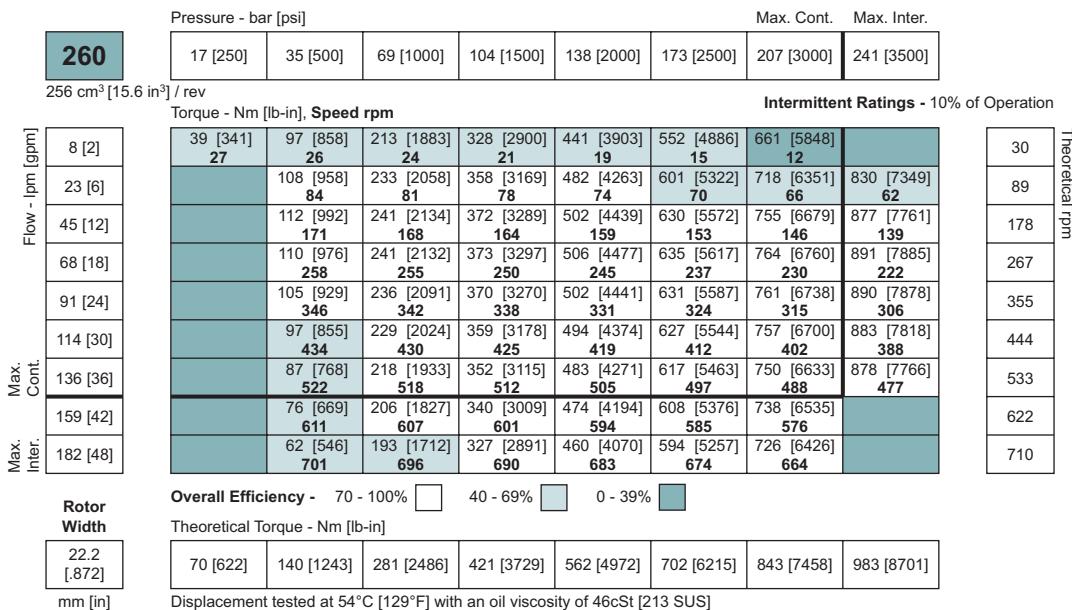

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DISPLACEMENT PERFORMANCE

Max. Max. Inter. Cont.	Flow - lpm [gpm]	Pressure - bar [psi]							Max. Cont.	Max. Inter.
		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]		
375	367 cm ³ [22.4 in ³] / rev	Intermittent Ratings - 10% of Operation								
8 [2]	62 [546] 18	147 [1297] 17	311 [2752] 14	474 [4197] 11	634 [5609] 8	792 [7010] 5			21	Theoretical rpm
23 [6]	162 [1431] 57	340 [3011] 54	518 [4585] 50	691 [6118] 46	860 [7612] 42	1024 [9065] 38	1186 [10495] 34		62	
45 [12]	167 [1474] 117	350 [3100] 114	534 [4729] 109	719 [6365] 103	900 [7963] 98	1075 [9510] 92	1246 [11026] 86		124	
68 [18]	164 [1454] 177	351 [3107] 173	538 [4761] 168	727 [6432] 162	914 [8084] 155	1097 [9706] 147	1278 [11312] 140		186	
91 [24]	158 [1400] 238	347 [3075] 234	536 [4740] 229	725 [6413] 222	913 [8080] 214	1099 [9726] 205	1284 [11365] 196		248	
114 [30]	148 [1308] 300	338 [2992] 295	528 [4672] 290	717 [6348] 282	906 [8018] 274	1093 [9672] 264	1280 [11331] 254		310	
136 [36]	135 [1191] 362	327 [2891] 358	518 [4583] 353	708 [6264] 345	898 [7948] 336	1088 [9628] 326	1277 [11298] 315		371	
159 [42]	120 [1065] 424	312 [2758] 420	504 [4463] 414	693 [6134] 406	883 [7815] 396	1074 [9500] 385	1263 [11174] 373		433	
182 [48]	103 [912] 486	294 [2601] 481	487 [4308] 475	674 [5968] 468	866 [7661] 458	1057 [9354] 444	1245 [11017] 432		495	
204 [54]	84 [747] 549	274 [2429] 544	466 [4127] 538	656 [5808] 530	844 [7471] 521	1039 [9194] 510	1232 [10906] 490		557	
227 [60]	64 [567] 613	253 [2241] 607	445 [3940] 600	634 [5608] 592	827 [7317] 582	1017 [8998] 572			619	

Rotor Width	Overall Efficiency - 70 - 100%	40 - 69%	0 - 39%
Theoretical Torque - Nm [lb-in]			
31.8 [1.252] mm [in]	101 [892]	202 [1784]	403 [3568]

Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

Max. Max. Inter. Cont.	Flow - lpm [gpm]	Pressure - bar [psi]							Max. Cont.	Max. Inter.
		17 [250]	35 [500]	69 [1000]	104 [1500]	138 [2000]	173 [2500]	207 [3000]		
450	455 cm ³ [27.8 in ³] / rev	Intermittent Ratings - 10% of Operation								
8 [2]	82 [722] 15	189 [1674] 14	400 [3538] 12	608 [5384] 11	816 [7224] 9				17	Theoretical rpm
23 [6]	88 [780] 47	201 [1782] 46	425 [3764] 44	646 [5718] 40	863 [7639] 37	1070 [9473] 34	1276 [11292] 31		50	
45 [12]	91 [803] 96	205 [1813] 95	434 [3841] 92	663 [5871] 87	891 [7883] 82	1113 [9849] 77	1327 [11747] 72		100	
68 [18]	86 [757] 145	200 [1770] 144	430 [3807] 141	662 [5861] 136	894 [7916] 130	1124 [9950] 123	1349 [11934] 117		150	
91 [24]	77 [678] 194	191 [1692] 193	423 [3747] 190	656 [5807] 185	888 [7859] 179	1120 [9910] 171	1347 [11923] 163		200	
114 [30]	64 [567] 244	179 [1583] 243	413 [3652] 239	646 [5718] 234	879 [7779] 227	1113 [9854] 220	1344 [11896] 211		250	
136 [36]	162 [1434] 293	397 [3516] 289	631 [5583] 284	865 [7654] 277	1098 [9713] 269	1329 [11764] 259			300	
159 [42]	143 [1266] 343	378 [3347] 340	613 [5425] 334	847 [7498] 327	1080 [9558] 318	1313 [11620] 309			349	
182 [48]	122 [1081] 393	357 [3155] 390	592 [5238] 384	826 [7306] 377	1058 [9363] 368	1291 [11427] 357			399	
204 [54]	97 [859] 445	333 [2947] 440	568 [5029] 434	803 [7180] 426	1034 [9148] 417	1266 [11206] 406			449	
227 [60]	73 [642] 496	305 [2698] 491	540 [4781] 484	775 [6862] 477	1006 [8899] 467	1242 [10994] 458			499	

Overall Efficiency - 70 - 100% □ 40 - 69% ■ 0 - 39% ■

Theoretical Torque - Nm [lb-in]

125 [1106]	250 [2212]	500 [4425]	750 [6637]	1000 [8849]	1250 [11061]	1500 [13274]	1750 [15486]
------------	------------	------------	------------	-------------	--------------	--------------	--------------



Displacement tested at 54°C [129°F] with an oil viscosity of 46cSt [213 SUS]

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

D9 (All Series)



For Heavy Duty Applications

DISPLACEMENT PERFORMANCE

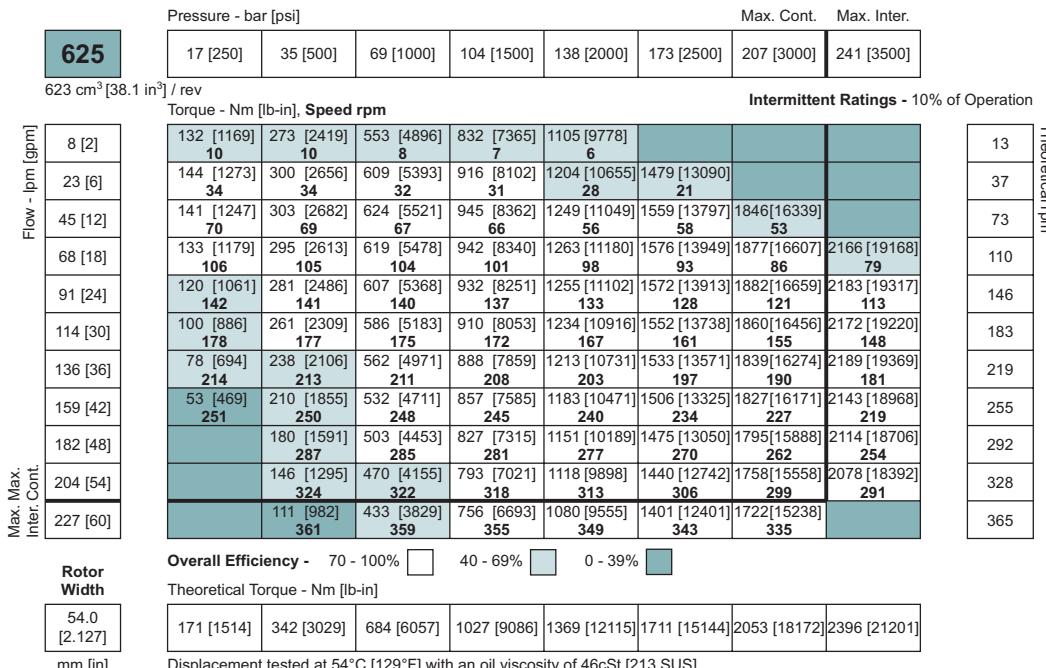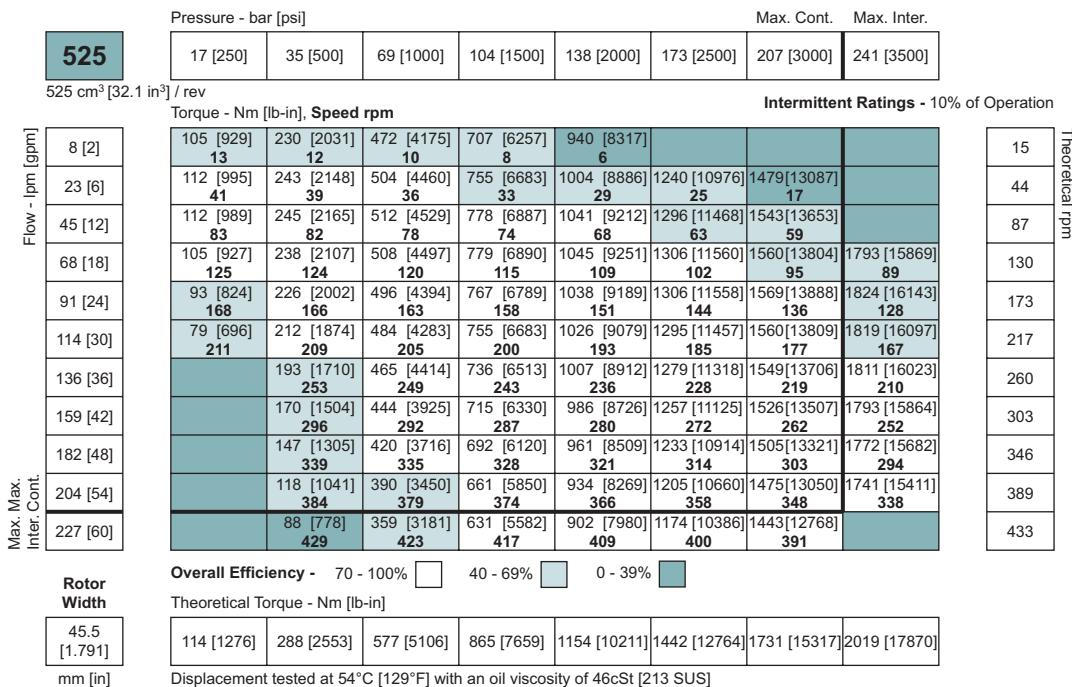

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

DISPLACEMENT PERFORMANCE

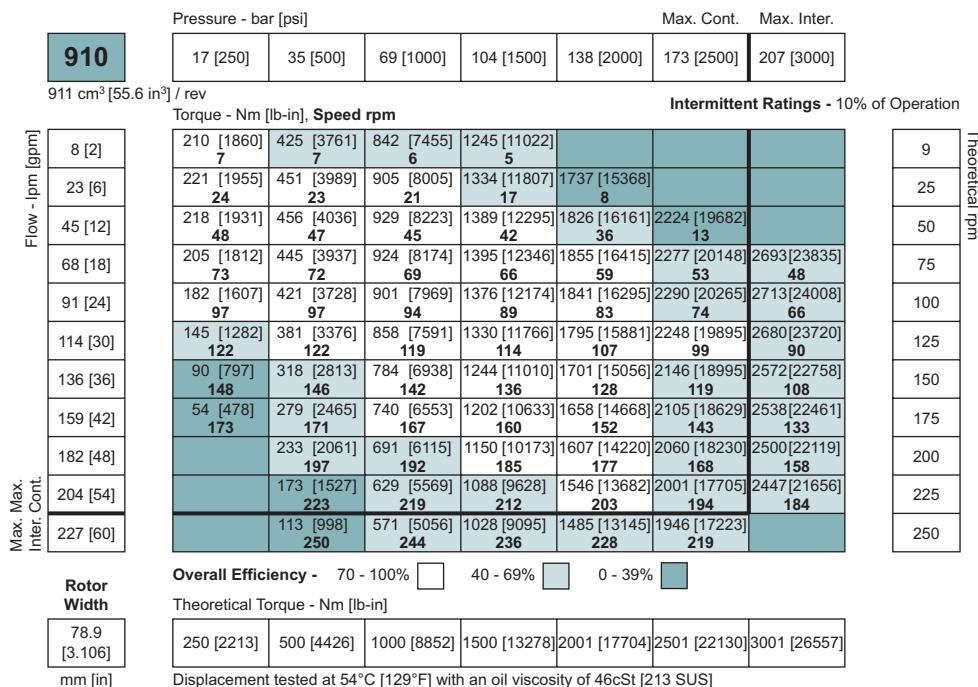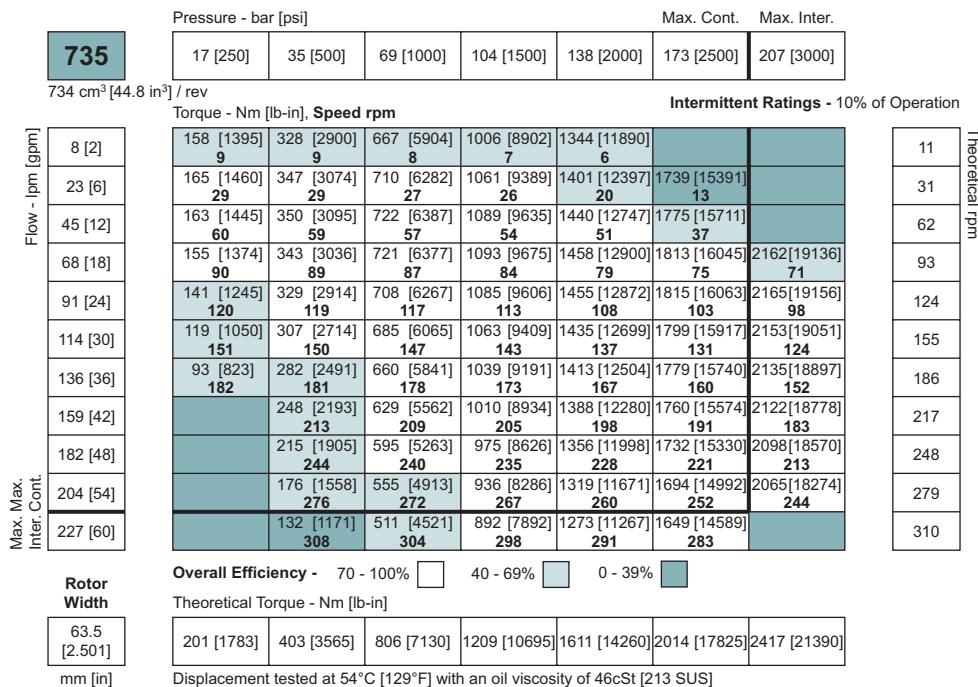

► Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

D9 (All Series)

For Heavy Duty Applications

DISPLACEMENT PERFORMANCE



- ▶ Performance data is typical. Performance of production units varies slightly from one motor to another. Operating at maximum continuous pressure and maximum continuous flow simultaneously is not recommended. For additional information on product testing please refer to page 6.

D9 (800/801 Series) Heavy Duty Hydraulic Motor

HOUSINGS



4-HOLE, SAE C MOUNT

C8 Side Ports **E8** Side Ports

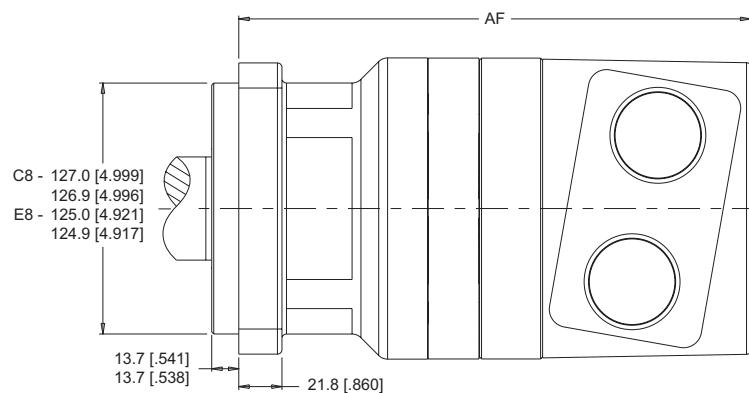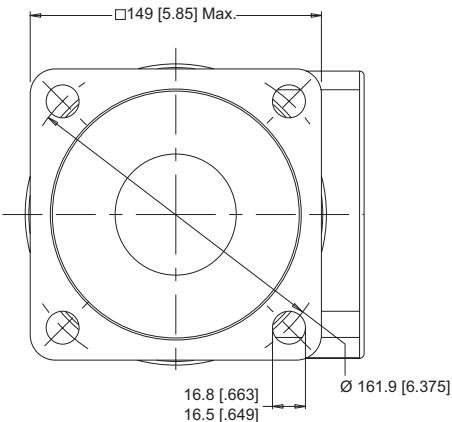



4-HOLE, WHEEL MOUNT WITH 160mm PILOT

D8 Side Ports

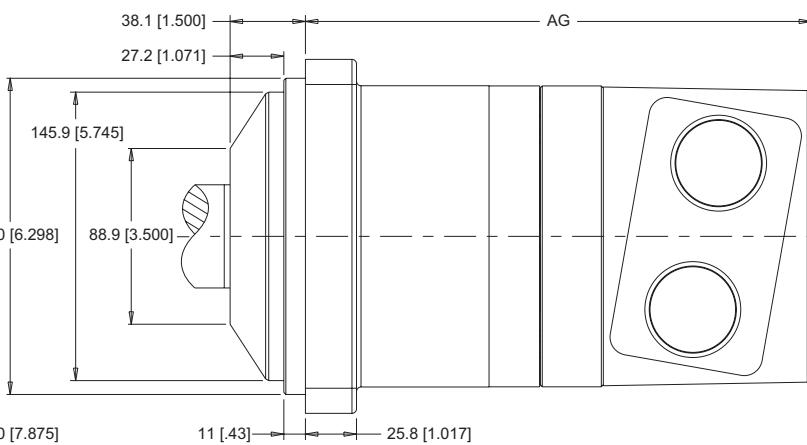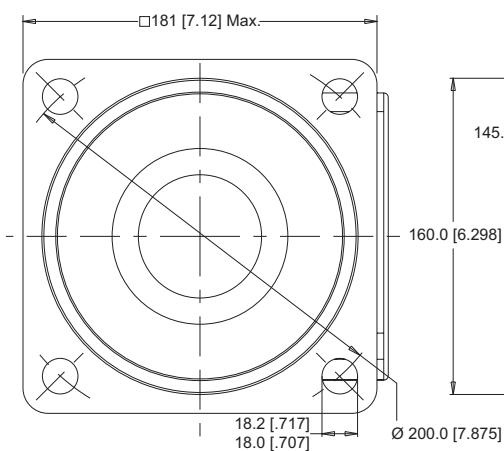

4-HOLE, WHEEL MOUNT

W8 Side Ports

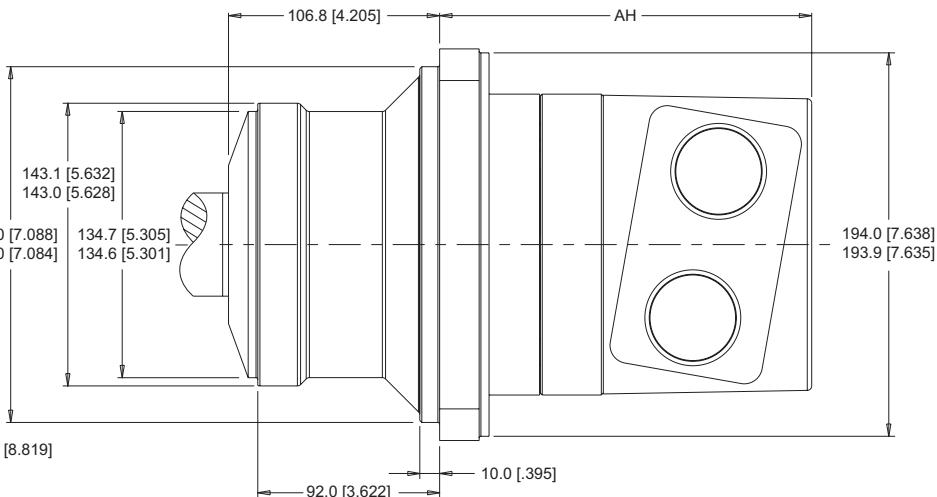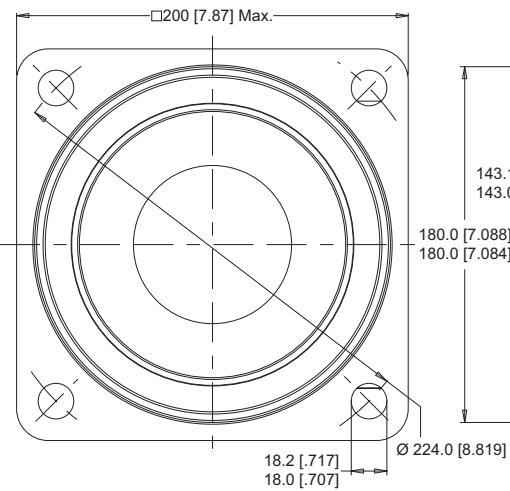

► Dimensions AF, AG & AH are charted on page 56.

D9 (800/801 Series)


Heavy Duty Hydraulic Motor

TECHNICAL INFORMATION


ALLOWABLE SHAFT LOAD / BEARING CURVE

The bearing curve represents allowable bearing loads based on ISO 281 bearing capacity for an L_{10} life of 2,000 hours at 100 rpm. Radial loads for speeds other than 100 rpm may be calculated using the multiplication factor table on page 7.


SAE C MOUNTS

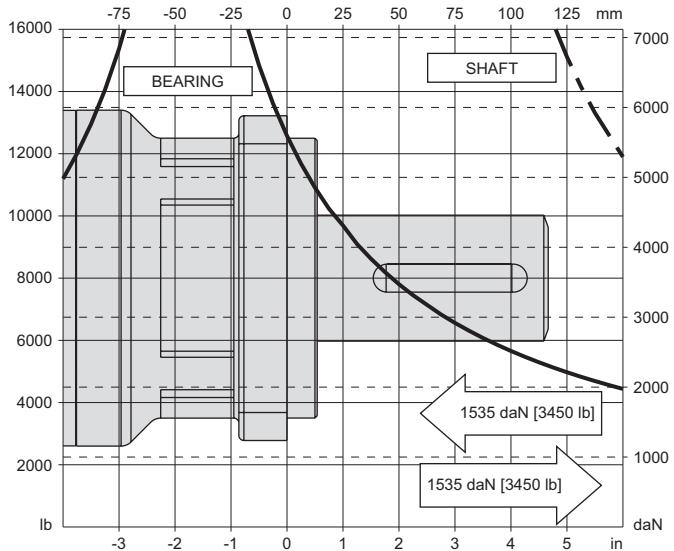

160mm PILOT WHEEL MOUNTS

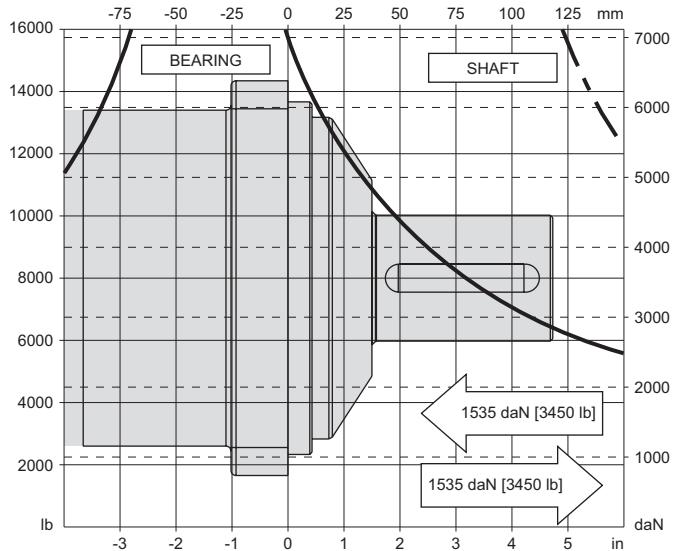

WHEEL MOUNTS

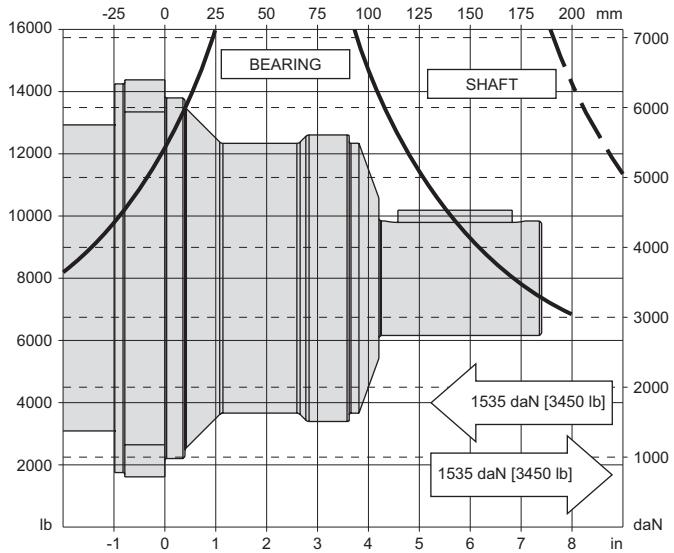

LENGTH & WEIGHT CHARTS

Dimensions AF, AG & AH are the overall motor lengths from the rear of the motor to the mounting surface and are referenced on detailed drawings listed on page 55.

AF	Length	Weight
#	mm [in]	kg [lb]
260	249 [9.80]	32.0 [70.5]
300	252 [9.92]	32.5 [71.4]
375	258 [10.16]	33.2 [73.1]
450	266 [10.47]	34.1 [75.1]
525	272 [10.71]	34.9 [76.8]
625	281 [11.06]	35.9 [78.9]
735	290 [11.72]	37.0 [81.4]
910	305 [12.01]	38.8 [85.4]
1K0	316 [12.44]	40.0 [88.0]

AH	Length	Weight
#	mm [in]	kg [lb]
260	178 [7.01]	37.7 [83.0]
300	182 [7.17]	38.1 [83.9]
375	188 [7.40]	38.9 [85.6]
450	196 [7.72]	39.8 [87.6]
525	202 [7.95]	40.6 [89.2]
625	210 [8.27]	41.6 [91.4]
735	220 [8.66]	42.7 [93.9]
910	235 [9.25]	44.5 [97.9]
1K0	245 [9.65]	45.7 [100.5]

AG	Length	Weight
#	mm [in]	kg [lb]
260	246 [9.69]	37.6 [82.8]
300	250 [9.84]	38.0 [83.7]
375	256 [10.08]	38.8 [85.4]
450	263 [10.35]	39.7 [87.4]
525	270 [10.63]	40.5 [89.0]
625	278 [10.94]	41.5 [91.2]
735	288 [11.34]	42.6 [93.7]
910	303 [11.93]	44.4 [97.7]
1K0	313 [12.32]	45.6 [100.3]



► All D9 series motor weights can vary ± 2.3 kg [5 lb] depending on model configurations such as housing, shaft, endcover, options etc.

PORTING

► Dimensions shown are without paint. Paint thickness can be up to 0.13 [.005].

SIDE PORTED - OFFSET MANIFOLD



7 Main Ports **A, B:** G 3/4
Drain Port **C:** G 1/4

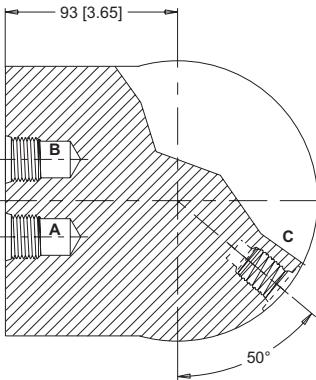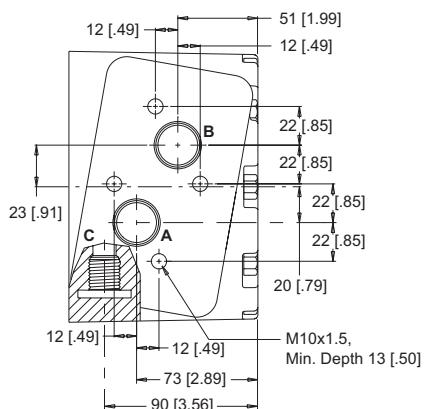



SIDE PORTED - OFFSET MANIFOLD

8 Main Ports **A, B:** G 1
Drain Port **C:** G 1/4

STANDARD

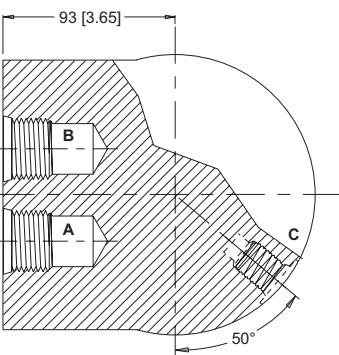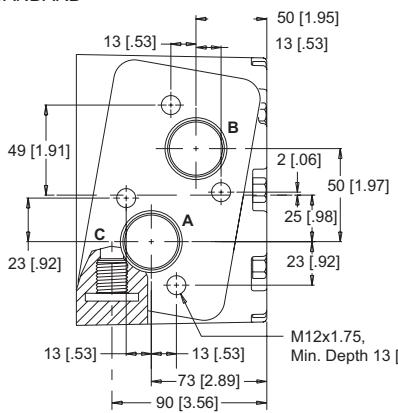

OPTIONAL

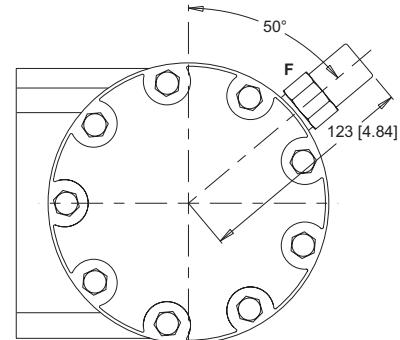



E: 10 Series/2-Way Valve Cavity 7/8-14 UNF **F:** Valve Cartridge Installed



SIDE PORTED - OFFSET

9 Main Ports A, B: 1 5/16-12 UNF
Drain Port C: 3/4-16 UNF

STANDARD

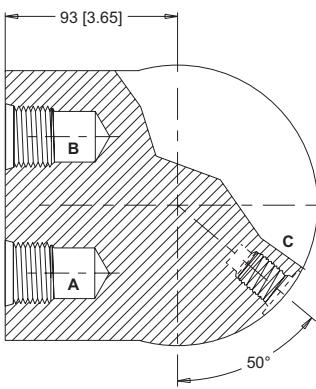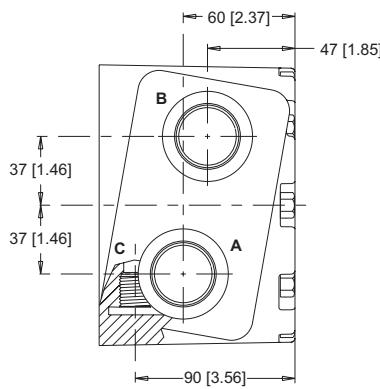

OPTIONAL

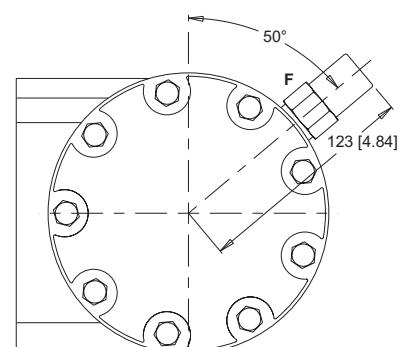

E: 10 Series/2-Way Valve Cavity 7/8-14 UNF **F:** Valve Cartridge Installed

D9 (800/801 Series)


Heavy Duty Hydraulic Motor

PORTING


SIDE PORTED - SPLIT FLANGE

0 Main Ports **A, B:** 1-1/4" Drilled
Drain Port **C:** 3/4-16 UNF

STANDARD

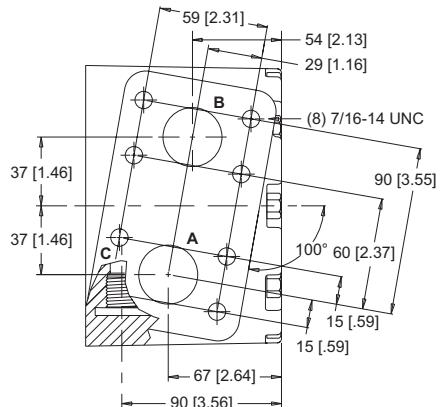


OPTIONAL

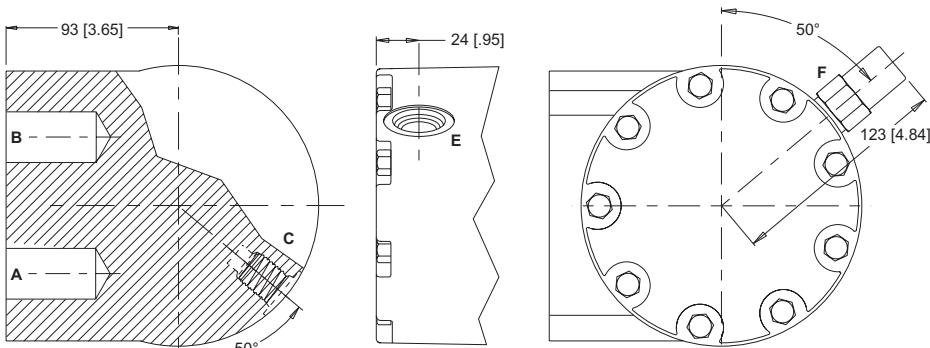

E: 10 Series/2-Way Valve Cavity 7/8-14 UNF F: Valve Cartridge Installed


SHAFTS

23 14 Tooth Spline

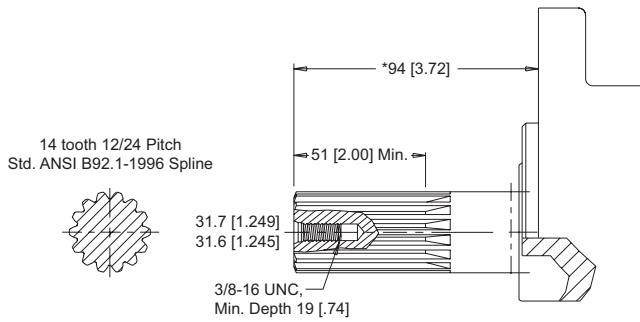


Max. Torque: 2070 Nm [18400 lb-in]

33 17 Tooth Spline

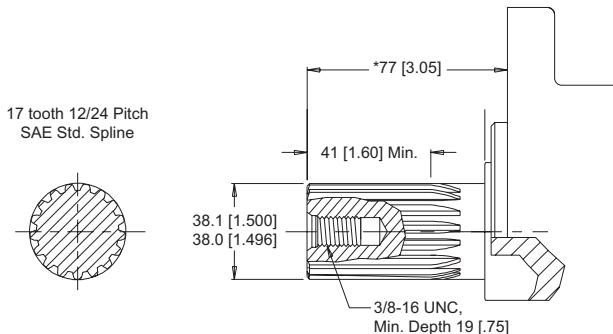


Max. Torque: 2250 Nm [19900 lb-in]

30 1-1/2" Straight

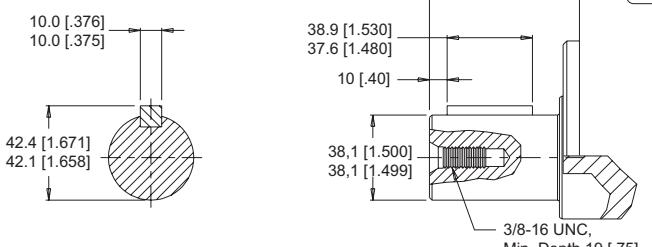

Max. Torque: 2230 Nm [19800 lb-in]


36 40mm Straight

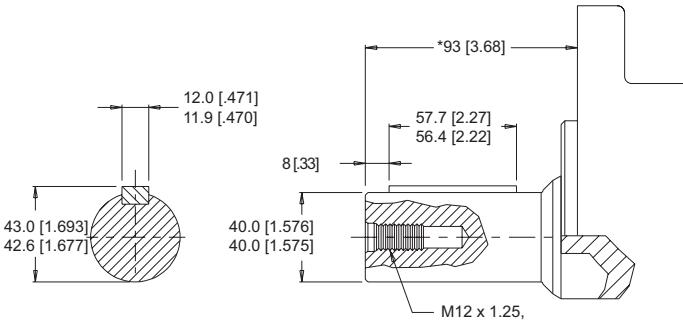


► *Shaft lengths may vary ± 0.8 [.030]

SHAFTS


38 45mm Tapered

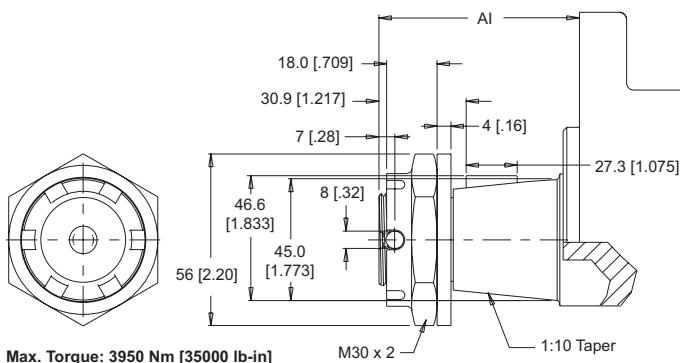


47 2-1/4" Straight Extended

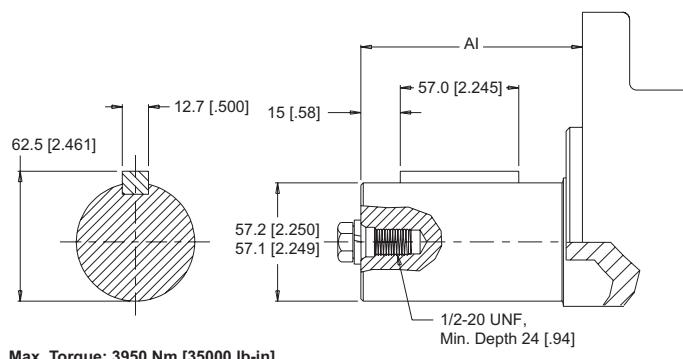


40 2-1/4" Straight

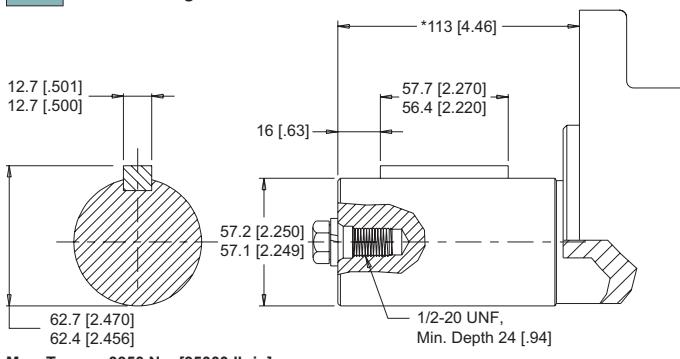


68 50mm Straight Extended

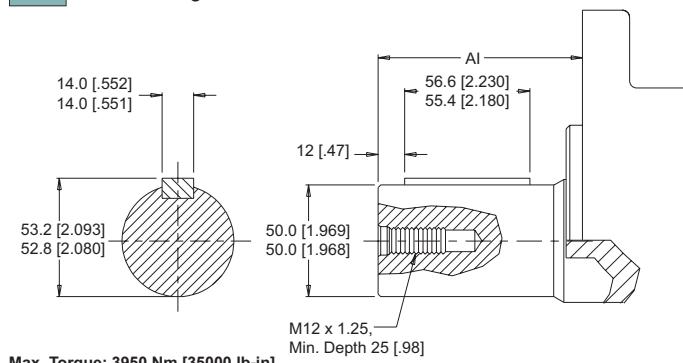


41 50mm Straight

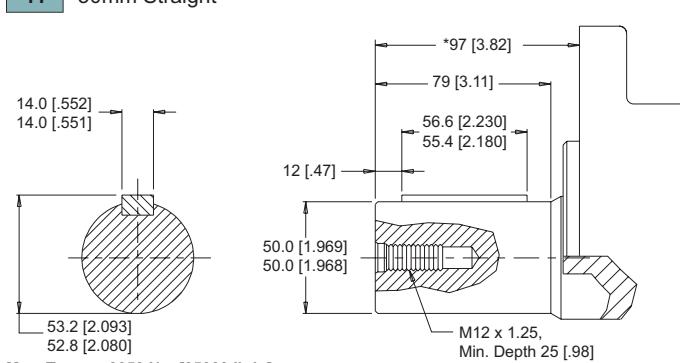

D3 60mm Tapered

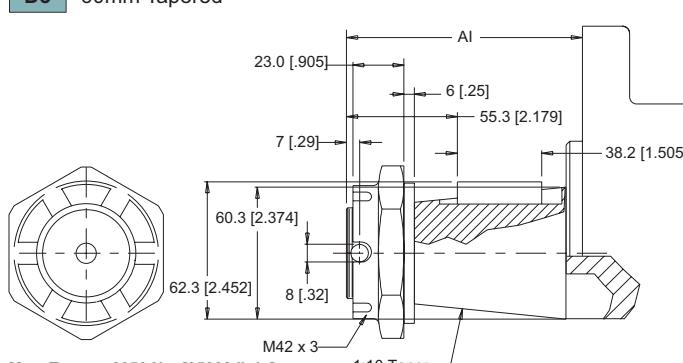

42 16 Tooth Spline

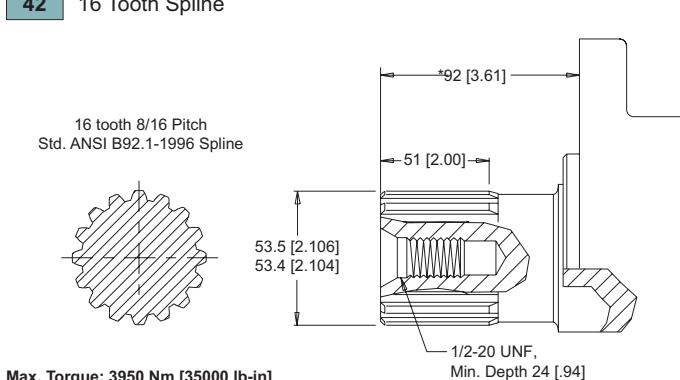

MOUNTING / SHAFT LENGTH CHART

Dimension AI is the overall distance from the motor mounting surface to the end of the shaft and is referenced on detailed shaft drawings above.


► Shaft lengths vary ± 0.8 [.030]. The 38, 47, 68 & D3 shafts are only available on wheel mounts. All other shafts are only available on SAE C mounts.

AI	D8 Wheel Mounts	W8 Wheel Mounts
#	mm [in]	mm [in]
38	121 [4.78]	189 [7.45]
47	120 [4.73]	188 [7.40]
68	120 [4.73]	188 [7.40]
D3	144 [5.67]	212 [8.34]

D9 (800/801 Series)



Heavy Duty Hydraulic Motor

ORDERING INFORMATION



1. CHOOSE SERIES DESIGNATION

800 Counterclockwise Rotation **801** Clockwise Rotation



► The 800 & 801 series are bi-directional. Reversing the inlet hose will reverse shaft rotation.

2. SELECT A DISPLACEMENT OPTION

260 256 cm³/rev [15.6 in³/rev]

300 294 cm³/rev [17.9 in³/rev]

375 367 cm³/rev [22.4 in³/rev]

450 455 cm³/rev [27.8 in³/rev]

525 525 cm³/rev [32.1 in³/rev]

625 623 cm³/rev [38.1 in³/rev]

735 734 cm³/rev [44.8 in³/rev]

910 911 cm³/rev [55.6 in³/rev]

1K0 1027 cm³/rev [62.7 in³/rev]

3a. SELECT MOUNT TYPE

▼ SIDE MOUNTS

C8 SAE C Mount (5" Pilot)

D8 Wheel Mount (160mm Pilot)

E8 SAE C Mount (125mm Pilot)

W8 Wheel Mount

3b. SELECT PORT SIZE

▼ SIDE PORT OPTIONS

0 1 1/4-12 UNF Split Flange

7 G 3/4 Offset Manifold

8 G 1 Offset Manifold

9 1 5/16-12 UNF, Offset



4. SELECT A SHAFT OPTION

23 14 Tooth Spline

30 1-1/2" Straight

33 17 Tooth Spline

36 40mm Straight

38 45mm Tapered

40 2-1/4" Straight

41 50mm Straight

42 16 Tooth Spline

47 2-1/4" Straight Extended

68 50mm Straight Extended

D3 60mm Tapered

► The 38, 47, 68 & D3 shafts are available on wheel mounts only. All other shafts are available on SAE C mounts only.

5. SELECT A PAINT OPTION

A Black

B Black, Unpainted Mounting Surface

Z No Paint

6. SELECT A VALVE CAVITY / CARTRIDGE OPTION

A None

F 121 bar [1750 psi] Relief

B Valve Cavity Only

G 138 bar [2000 psi] Relief

C 69 bar [1000 psi] Relief

J 173 bar [2500 psi] Relief

D 86 bar [1250 psi] Relief

L 207 bar [3000 psi] Relief

E 104 bar [1500 psi] Relief

► Valve cavity is not available on port option 7.

7. SELECT AN ADD-ON OPTION

A Standard

8. SELECT A MISCELLANEOUS OPTION

AA None